



K系列斜齿-螺旋锥齿减速器


K SERIES HELICAL-BEVEL GEAYMOTOR

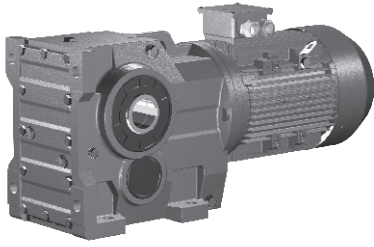


KAB型 Model KAB
 底脚空心轴安装弧齿锥齿轮硬齿面减速机。
 Foot-mounted helical-bevel gear reducer with hollow shaft




KAT型 Model KAT
 空心轴安装防转臂固定弧齿锥齿轮硬齿面减速机。
 Helical-bevel gear reducer in torque-arm version with hollow shaft

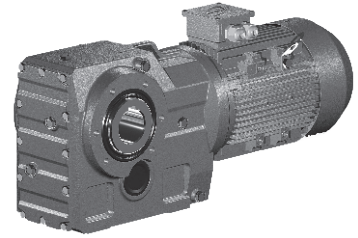


KA型 Model KA
 空心轴安装弧齿锥齿轮硬齿面减速机。
 Helical-bevel gear reducer with hollow shaft

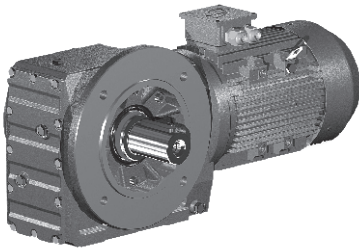


KF型 Model KF
 B5法兰安装弧齿锥齿轮硬齿面减速机。
 Helical-bevel gear reducer in B5 flange-mounted version




KAZ型 Model KAZ
 小法兰空心轴安装弧齿锥齿轮硬齿面减速机。
 Short-flange mounted helical-bevel gear reducer with hollow shaft




K..R型 Model K..R
 K系列与 R..7系列组合减速机。
 Combination of Kseries reducer and R..7 series reducer

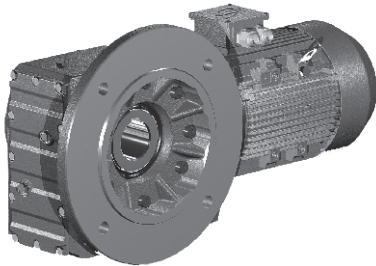

KAF型 Model KAF
 B5法兰空心轴安装弧齿锥齿轮硬齿面减速机。
 Helical-bevel gear reducer in B5 flange-mounted version with hollow shaft



K..S型 Model K..S
 输入轴型, 即配输入轴不配电动机的弧齿锥齿轮硬齿面减速机。
 Input-shaft style, in another word, helical-bevel gear reducer equipped with input shaft but without the motor

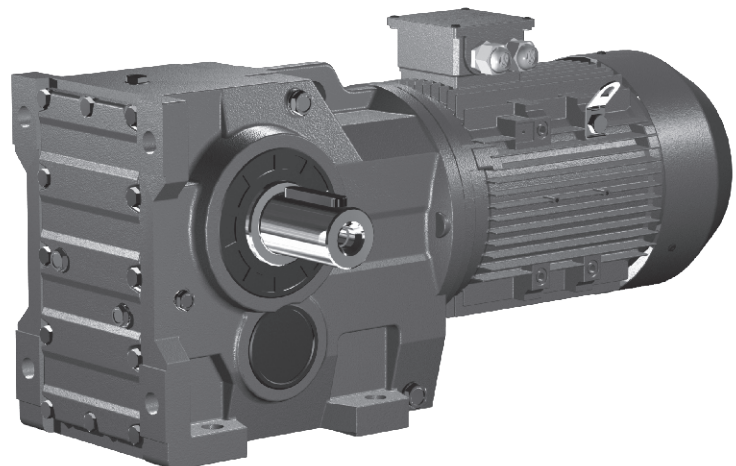

K型 Model K
 底脚安装弧齿锥齿轮硬齿面减速机。
 Foot-mounted helical-bevel gear reducer

一、性能特点 Characteristics:

1. 赛岚减速机是在模块组合体系的基础上设计的, 可以方便地配用各种型式的电动机或采用其它动力输入。同种机型可配用多种功率的电动机。容易实现各种机型之间的组合联接。
2. 传动效率高, 单机型减速机效率高达96%。
3. 传动比划分细, 范围广。组合机型可以形成较大的传动比, 输出转速低。
4. 安装形式多样: 可任意底脚、B5法兰或B14 法兰安装, 底脚安装减速机有两个机加工的底脚安装平面。
1. SAILAN reducers are based on the building block design, so it's convenient for them to fit all types of motors or to connect with other power input. The same type of reducers can fit motors with different power, so that it's possible for different types of machines to combine or connect.
2. High transmission efficiency. A single machine can reach a transmission efficiency as much as 96%.
3. Precise division of transmission ratio with a wide range. The combination of machines can produce a larger transmission ratio at a low output rotational speed.
4. Various ways of installation. Horizontal installation at any position or flanged installation, The bottom feet installs the machine that deceleration machine have two bottom feet processes to install the flat surface.

二、场所条件 Working Environment:

1. 环境温度-40℃~50℃。(0℃以下启动时润滑油要加热到0℃以上。)
2. 海拔不超过1000米。
3. 输入转速不大于1800rpm, 齿轮最高圆周速度不超过22m/s。
4. 可用于正反运转。
5. 无行业限制。
6. 其他条件下使用请与我公司技术部联系。
1. Working temperature: -40℃~50℃ (The lubrication should be heated until above 0℃ if the machine works Below 0℃.)
2. The working place should be lower than 1,000 meters above sea level.
3. The input rotational speed should not exceed 1,800r/m. The circumferential speed of the gear should not exceed 20m/s.
4. Suitable for normal-reverse rotation.
5. Without industry limitation.
6. Please consult our technical supporting department for other circumstances.

三、选型指南 Instructions for Selection:

在确定使用系数之前必须先确定一天的运行小时数, 每小时的起停次数和负载类型。其中负载类型按下列公式计算:

The daily operating time, the starting frequency and the load classifications be determined before deciding the service factor. The load classifications is calculated with the following formula:

负载类型 Load classification

- I 均匀负载, 惯性加速系数 ≤ 0.2
 II 中等冲击负载, 惯性加速系数 ≤ 3
 III 强烈冲击负载, 惯性加速系数 ≤ 10
 Uniform load, mass acceleration factor ≤ 0.2
 Medium Impact Load, mass acceleration factor ≤ 3
 Heavy shock Load, mass acceleration factor ≤ 10

如果惯性加速系数 > 10 , 请与我公司技术部联系。

$$\text{惯性加速系数} = \frac{\text{所有外部转动惯量}}{\text{驱动电机的转动惯量}}$$

实际的工况系数 f_A 必须满足下式: 使用系数 $f_B \geq$ 工况系数 f_A

使用系数 f_B 已在后面的选型参数表中列出。

允许的轴伸径向载荷及轴向载荷

输出轴端允许的径向载荷及轴向载荷资料, 请与我公司技术部联系。

减速机的使用与维护请参阅随机附带的《减·变速机使用说明书》。

Please contact our technical supporting department in case the mass acceleration factor > 10 .

$$\text{Mass acceleration factor} = \frac{\text{All external mass moments of Inertia}}{\text{Mass moment of inertia on the motor end}}$$


The actual operating mode factor (f_A) should meet the following formula: Service factor $f_B \geq$ operating mode factor f_A

The service factor f_B is listed in the parameter selection list.

The permitted overhung loads and the axial forces.

Please contact our technical supporting department for the information on the permitted overhung loads and the axial forces at the output end of the shaft.


Regarding the use and maintenance of the reducer, please refer to the attached Instruction Manual of the Reductor and the Variable Speed Motor.

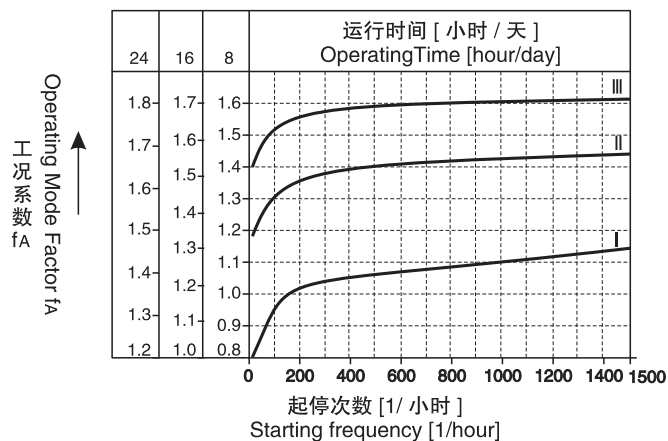

四、结构形式 Mounting type:

K系列结构图:/ Kseries structrue drawing:

- | | |
|-----------------------------------|-----------------------------------|
| 1. 油封 Circlip for hole | 21. 孔用挡圈 Circlip for hole |
| 2. 孔用挡圈 Circlip for hole | 22. 封盖 Grand |
| 3. 轴承 Bearing | 23. 油镜 Oil gauge |
| 4. 大齿轮 First-stage big gear | 24. 螺钉 Screw |
| 5. 平键 Key | 25. 螺塞 Oil plug |
| 6. 输出轴 Output shaft | 26. 箱盖 Cover plate |
| 7. 平键 Key | 27. 二级齿轮轴 Second-stage gear shaft |
| 8. 轴承 Bearing | 28. 平键 Key |
| 9. 孔用挡圈 Circlip for hole | 29. 轴承 Bearing |
| 10. 封盖 Grand | 30. 孔用挡圈 Circlip for hole |
| 11. 封盖 Grand | 31. 轴承 Bearing |
| 12. 孔用挡圈 Circlip for hole | 32. 一级大齿轮 First-stage big gear |
| 13. 轴承 Bearing | 33. 止动垫圈 Lock washer |
| 14. 调整环 Adjusting strip | 34. 小圆螺母 Round nut |
| 15. 三级齿轮轴 Second-stage gear shaft | 35. 一级小齿轮 First-stage gear shaft |
| 16. 平键 Key | |
| 17. 二级大齿轮 Second-stage big gear | |
| 18. 轴套 Shaft sleeve | |
| 19. 轴承 Bearing | |
| 20. 调整环 Adjusting strip | |

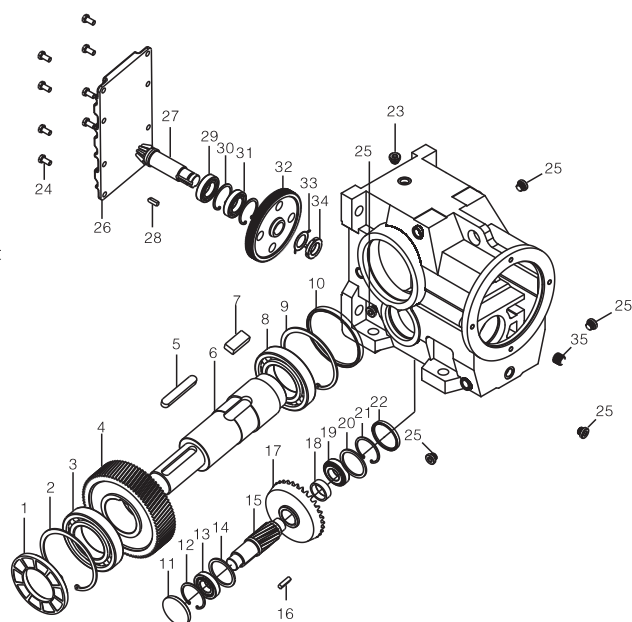


K系列斜齿、螺旋锥齿轮减速器型号规格及机型表示方法: Type, specification and model notation for Kseries helical gear, spiral bevel gear speed reducers.:

本系列减速器的型号规格有: K(37、47、57、67、77、87、97、107、127、157、167、187) 等12种, 减速比有5~186等多种速比, 可分别配置0.18~200kW。

Types, specifications of this series speed reducer have 12 kinds including K37、47、57、67、77、87、97、107、127、157、167、187 etc, speed reducing ratio: 5~186, which can be allocated to 0.18~200kW.

五、型号说明 Instructions for Models:

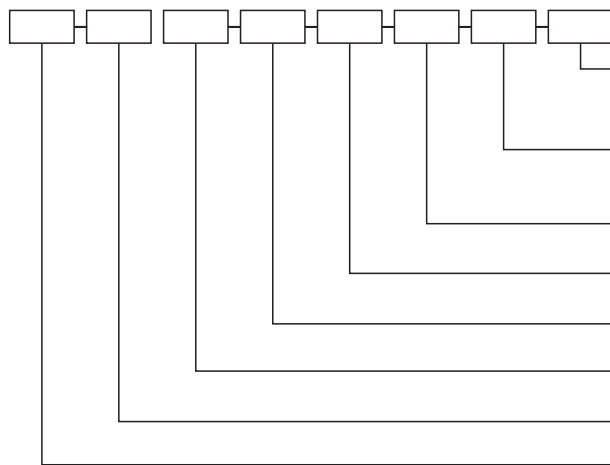

电机接线盒方向(角度)
The direction (angle) of the motor connection box

输出轴或输出法兰方向
The direction of the output shaft or the output flange

安装形式
Mounting position

传动比
Ratio

电机极数
Motor pole

电机功率
Motor power

电机类型代号
The codes for motor types

减速机结构形式和规格
The mounting type of the reducer and Specifications

例: KF47 - Y 0.37 - 4P - 71.30 - M2 - B - 270°

电机接线盒在图示270°处
The motor connecting box is at the position of 180° in the mounting position example.

输出法兰在图示B向
In the example the output flange is in the direction of B

安装形式: M2
Mounting position: M2

传动比: 71.30
Ratio: 71.30

4极
Poles 4

0.37kW

Y系列电机
Motors of Y series

KF型47规格
Specifications 47 for model KF

注：1.输入轴型没有电动机的各项内容。

2.无特别说明时Y系列电动机供货按IP54防护等级。

3.不注明安装形式时，按安装形式图中M1安装形式供货。

4.不注明接线盒角度时，按安装形式图中0度位置供货。

5. K、KF、KAF、KH型减速机不注明输出轴或输出法兰方向时，按安装形式图中A向供货。

6.如果减速机只承受单向载荷，请注明从输出轴端方向看的旋转方向，这有利于改善弧齿锥齿轮轴的受力。

7.电机尺寸请查看电机外型尺寸表。

Note:1. The input-shaft style is not equipped with any motor

2. Motors of Y series are supplied with protection grade of IP54 unless otherwise specified.

3. The mounting position of M1 as shown in the mounting position example is the default way when supplying unless otherwise specified.

4. 0° as shown in the mounting position example is the default connection box angle when supplying unless otherwise specified.

5. The mounting position of A as shown in the mounting position example is the default way when supplying reducers such as K、KF、KAF、KH model unless otherwise specified.

6. It is necessary to note the direction of rotation from the output shaft end.

7. About Motor size, please check table of motor's dimensions.

六、电机类型代号 Codes for Motor Types:

Y系列 Y series	Y	防爆电机 Flame-proof Motor	YB	直流电机 Direct Current Motor	Z
制动电机 Brake Motor	YEJ	辊道电机 Roll Motor	YG	变频电机 Variable Frequency Motor	YVP

七、联接法兰L2长度 Length of Connect Flange L2

K系列弧齿锥齿轮硬齿面减速机联接法兰L2长度表

The form on length of the connect flange L2 of the helical-bevel gear reductor of K series

电机机座号 Motor frame size 减速机型号 Reductor type	63	71	80	90	100	112	132	160	180	200	225	250	280	315
K..37	61.5	61.5	80	80	98	—	—	—	—	—	—	—	—	—
K..47	56	56	74.5	74.5	90.5	—	—	—	—	—	—	—	—	—
K..57	56	56	74.5	74.5	90.5	90.5	—	—	—	—	—	—	—	—
K..67	56	56	74.5	74.5	90.5	90.5	123	—	—	—	—	—	—	—
K..77	50	50	68.5	68.5	82.5	82.5	111	152.5	—	—	—	—	—	—
K..87	—	—	63.5	63.5	78.5	78.5	106	147.5	147.5	—	—	—	—	—
K..97	—	—	—	57.5	72.5	72.5	101	142.5	142.5	144.5	—	—	—	—
K..107	—	—	—	—	66.5	66.5	95	136.5	136.5	138.5	168.5	—	—	—
K..127	—	—	—	—	—	—	80	121.5	121.5	123.5	153.5	153.5	153.5	—
K..157	—	—	—	—	—	—	—	113.5	113.5	115.5	145.5	145.5	145.5	175.5
K..167	—	—	—	—	—	—	—	113.5	113.5	115.5	145.5	145.5	145.5	175.5
K..187	—	—	—	—	—	—	—	113.5	113.5	115.5	145.5	145.5	145.5	175.5


八、安装形式图释义 Explanation of mounting position example

 通气孔 Breather valve	 油位孔 Oil level plug	 放油孔 Oil drain plug
---	---	---

九、选型参数表释义 Explanation of Parameter Selection List

电机功率 Power (kW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N·m)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.37	11	336	132.32	1.19	K 47	4P	37
	11	318	125.23	1.26	KA 47	4P	36
	13	271	106.69	1.47	KF 47	4P	39
	15	235	92.27	1.71	KAF47	4P	38

K系列安装方位图/ K series installation direction diagram

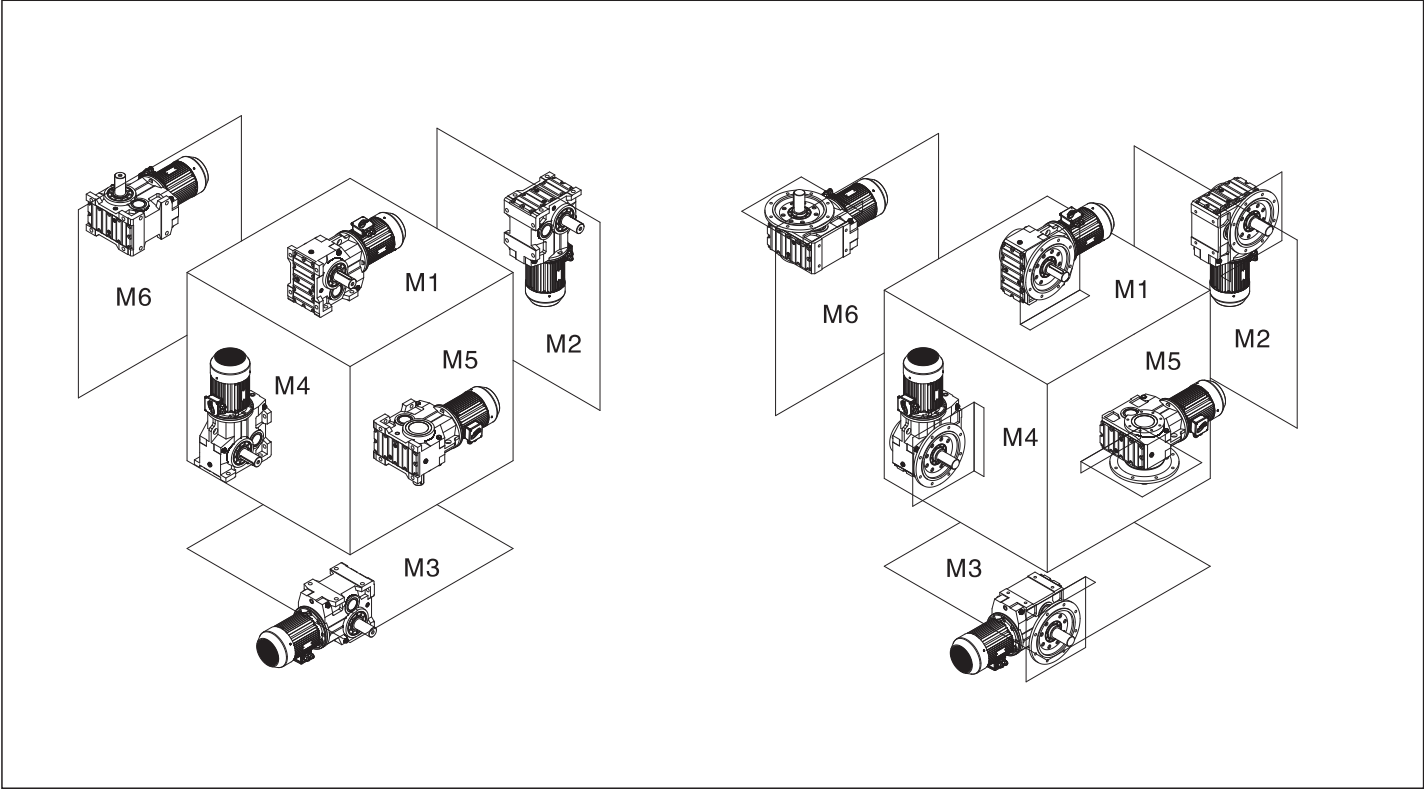

K系列油量表(单位kg) / K series oil capacity table (Unit:kg)


安装方位 机型号	M1	M2	M3	M4	M5	M6
K37	0.4	0.8	0.9	1.2	0.9	0.9
K47	0.6	0.9	1	1.4	1.1	1.1
K57	1.1	2.1	2.3	2.8	2.4	2.2
K67	1.1	2.2	2.4	3.2	2.5	2.5
K77	1.9	3.6	3.9	5.2	3.7	3.9
K87	3.2	7	7.6	9.5	6.8	7
K97	6.1	12.2	13.7	17.5	13.7	14
K107	6.5	13.2	16	21	15	15
K127	10.8	21.3	22.6	27.7	20.5	21
K157	17.2	34.4	36	50	32.2	34.4
K167	31	88	88	110	75	75
K187	56	155	155	190	120	120

K系列重量表 / K series weight table



机型号/Type	K37	K47	K57	K67	K77	K87	K97	K107	K127	K157	K167	K187
重量kg/Weight kg	13	22	29	33	45	81	150	230	420	680	1050	1650

注：表中重量为不加油时重量，带输入轴、输入法兰另加10%；带电机根据所配规格另加。
Note: Weight in the table means the weight when oil is not added. When input shaft is furnished, 10% weight should be added; If there is a motor, please add weight according to motor type.

K/ KAB37-157安装形式图 K/ KAB37-157 Mounting position example


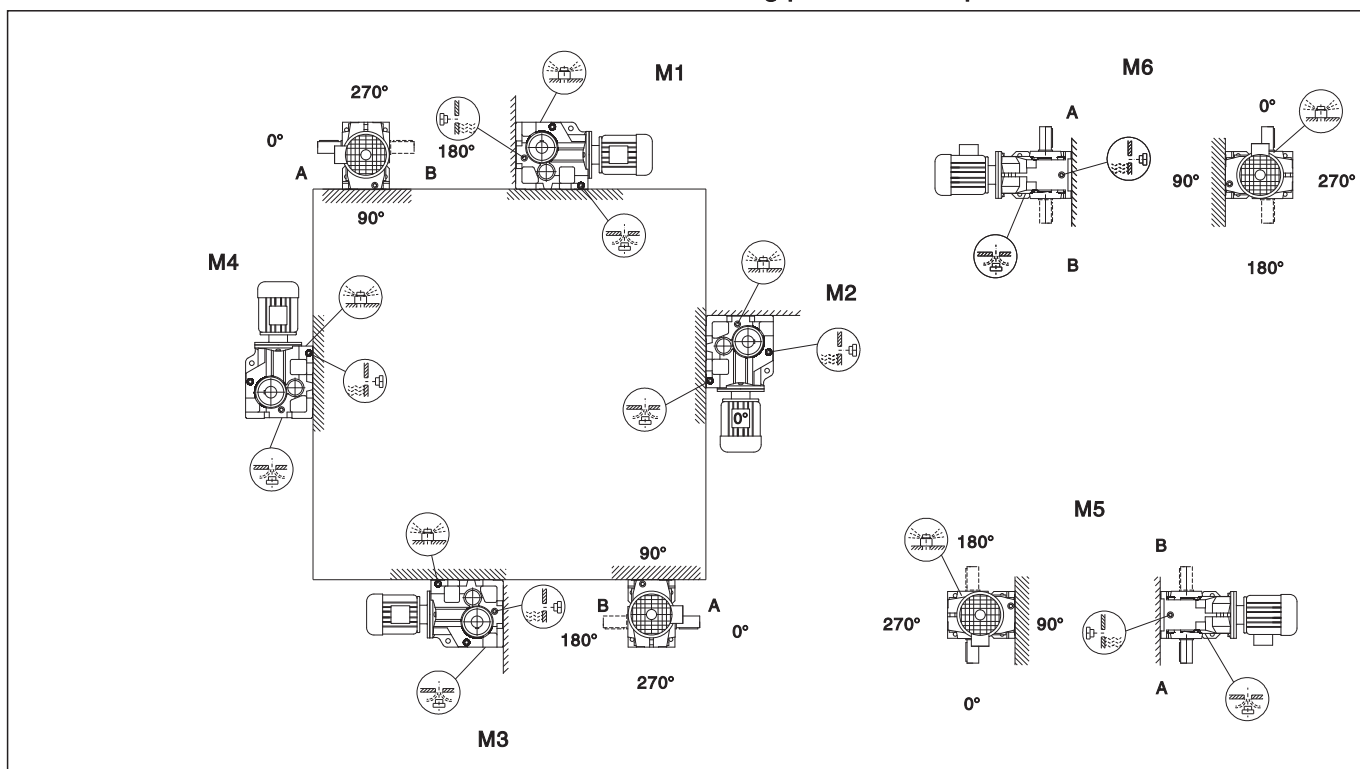


K/ KA167-187安装形式图 K/ KA167-187 Mounting position example

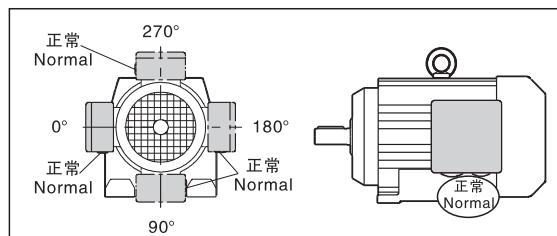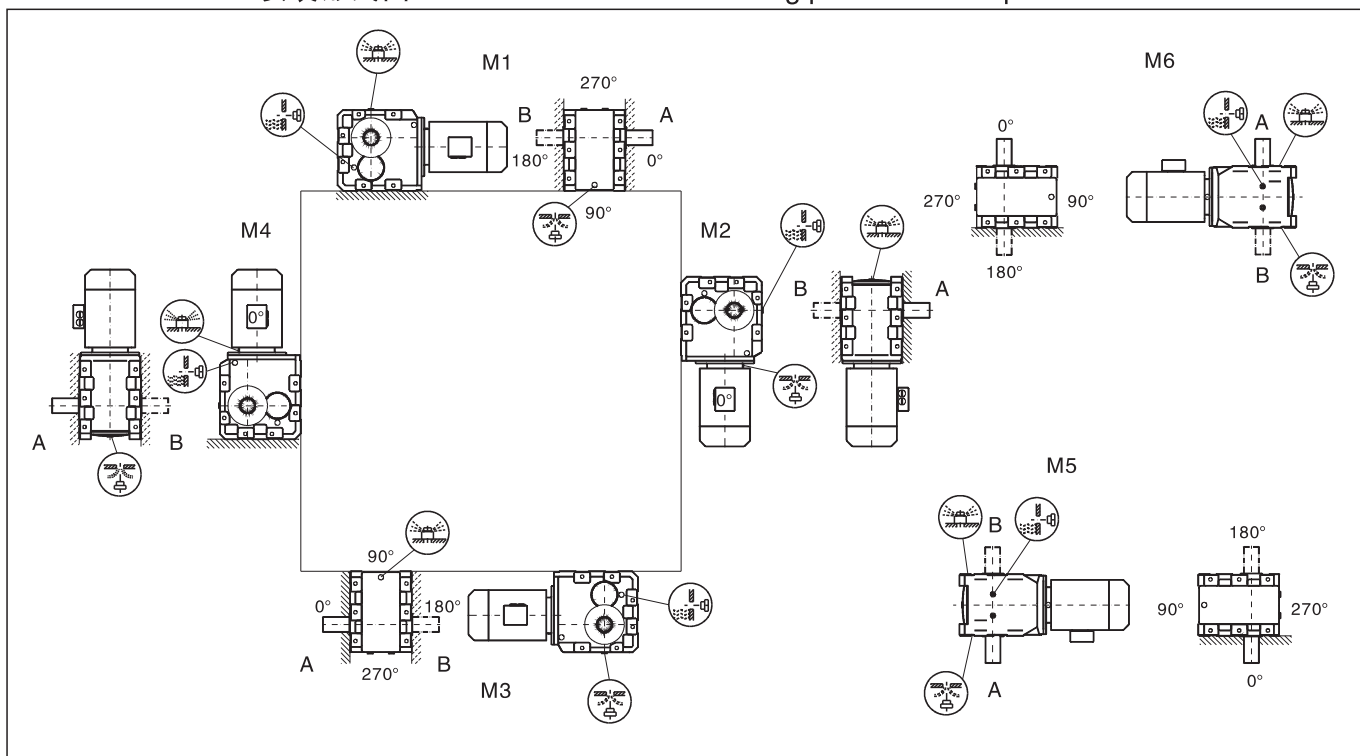



KAT37-157 安装形式图

KAT37-157 Mounting position example

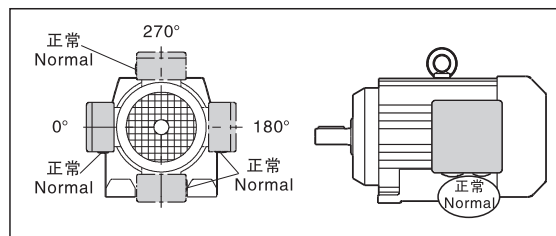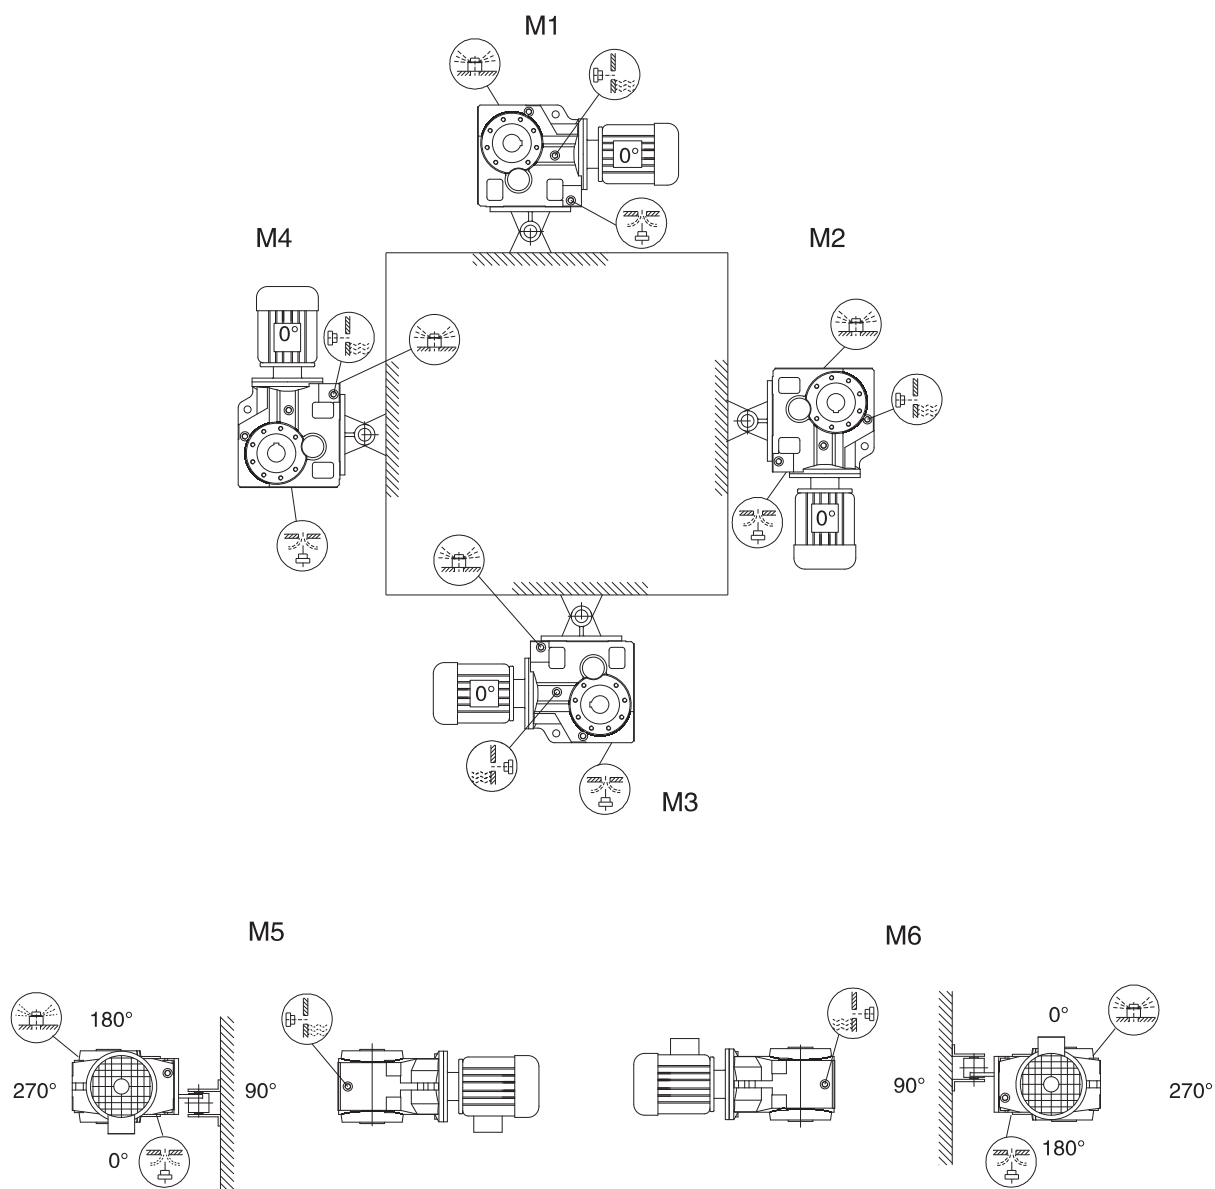

KF/ KAF37-157 安装形式图

KF/ KAF37-157 Mounting position example

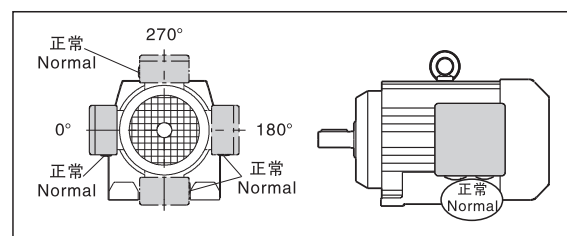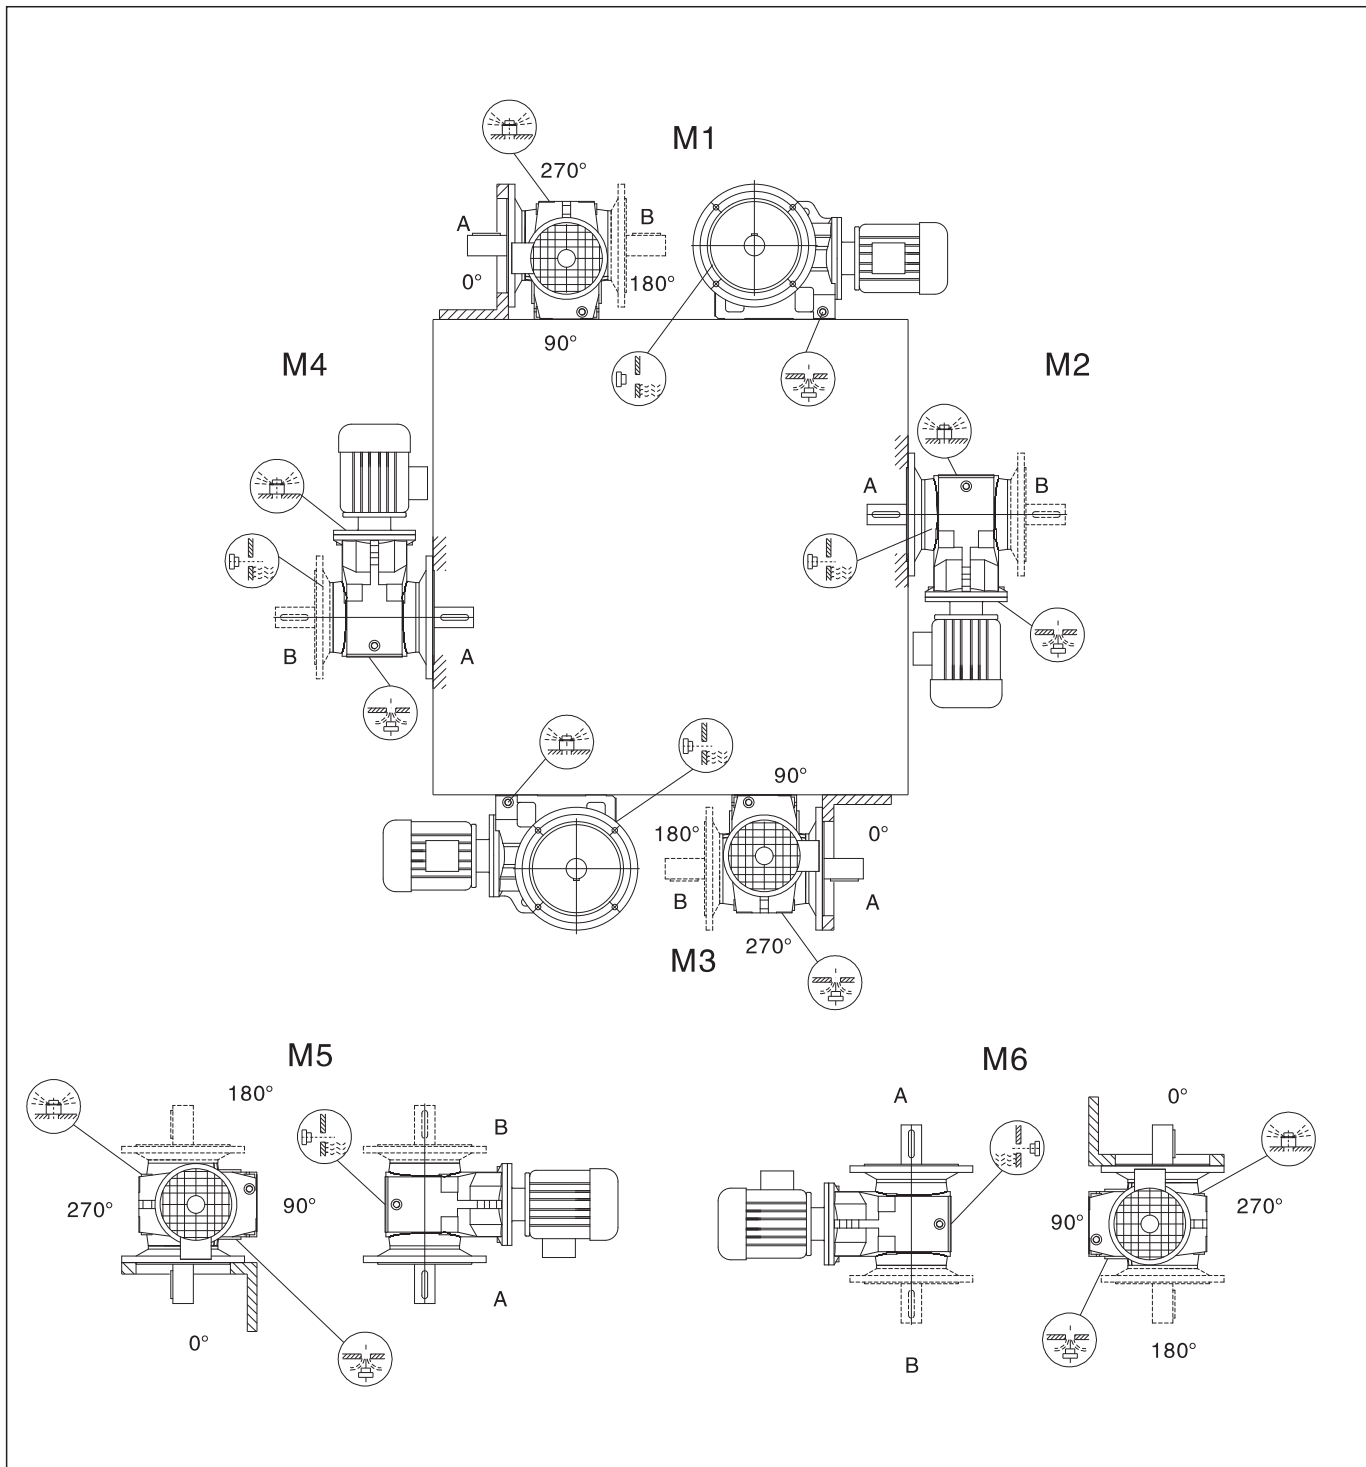

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole			
0.12KW						0.12KW								
0.08	11800	17550	1.10	K127 KF127 KA127 KAF127	R77 R77 R77 R77	1.0	930	1351	0.90	K67 KF67 KA67 KAF67	R37 R37 R37 R37			
0.09	10700	16006	1.20			1.2	795	1171	1.05					
0.09	9880	14975	1.30			1.3	695	1034	1.20					
0.11	8010	12440	1.60			1.5	585	903	1.40					
0.13	6920	10915	1.90			1.7	545	793	1.50					
0.14	6320	9819	2.1			2.0	440	697	1.85					
0.16	5220	8443	2.5			2.2	390	613	2.1					
0.18	4820	7482	2.7			2.5	340	542	2.4					
0.10 0.11 0.13 0.14 0.17 0.19 0.22 0.24 0.27 0.32	9590	14311	0.85	K107 KF107 KA107 KAF107	R77 R77 R77 R77	2.9	315	471	2.6			K57 KF57 KA57 KAF57R37	R37 R37 R37 R37	
	0.11	8060	12211			1.00	3.3	265	420					3.1
	0.13	6930	10677			1.15	3.8	235	361					3.5
	0.14	6280	9524			1.25	4.3	210	323					3.9
	0.17	5410	8328			1.50	4.9	176	279					4.7
	0.19	4720	7270			1.70	5.6	155	246					5.3
	0.22	3760	6184			2.1	6.3	134	217					6.1
	0.24	3320	5662			2.4	1.5	585	906	1.05				
0.27	3020	5138	2.7	1.7	525	806	1.15							
0.32	2700	4359	3.0	2.0	445	699	1.35							
0.17 0.20 0.23 0.26 0.30 0.34 0.39 0.44 0.50 0.57 0.65 0.74 0.85 0.96 1.1 1.2	5310	8054	0.80	K97 KF97 KA97 KAF97	R57 R57 R57 R57	2.2	390	615	1.55	K47 KF47 KA47 KAF47	R37 R37 R37 R37			
	0.20	4350	6970			1.00	2.5	340	544					1.75
	0.23	3890	6027			1.10	2.9	310	473					1.95
	0.26	3560	5391			1.20	3.3	265	421					2.3
	0.30	2950	4669			1.45	3.8	235	362					2.5
	0.34	2640	4082			1.65	4.3	210	319			2.9		
	0.39	2320	3583			1.85	4.9	176	280			3.4		
	0.44	2040	3108			2.1	5.6	155	246			3.9		
	0.50	1720	2757			2.5	6.4	135	215			4.4		
	0.57	1580	2419			2.7	7.2	122	192			4.9		
	0.65	1370	2123			3.2	2.2	430	639			0.95		
	0.74	1220	1856			3.5	2.5	370	552			1.10		
	0.85	1000	1625			4.3	2.8	315	495			1.25		
	0.96	860	1430			5.0	3.2	280	426			1.45		
	1.1	830	1261			5.2	3.7	235	375			1.70		
1.2	725	1102	5.9	4.2	215	327	1.85							
0.26 0.30 0.34 0.38 0.44 0.51 0.58 0.66 0.74 0.83 0.97 1.1 1.3 1.5 1.6 1.9	3380	5240	0.80	K87 KF87 KA87 KAF87	R57 R57 R57 R57	4.8	189	289	2.1	K37 KF37 KA37 KAF37	R17 R17 R17 R17			
	0.30	2850	4562			0.95	4.0	235	346			0.85		
	0.34	2610	4037			1.05	4.5	200	304			1.00		
	0.38	2330	3609			1.15	5.2	182	267			1.10		
	0.44	1990	3107			1.35	5.9	157	234			1.25		
	0.51	1700	2728			1.60	6.7	138	205			1.45		
	0.58	1500	2371			1.80	7.6	120	181			1.65		
	0.66	1380	2088			1.95	8.6	105	160			1.90		
	0.74	1220	1854			2.2	10	88	136			2.3		
	0.83	1090	1657			2.5	6.2	184	144.79			4.4		
	0.97	930	1415			2.9	K 67 KF 67 KA 67 KAF67	6P						
	1.1	800	1229			3.4								
	1.3	695	1078			3.9								
	1.5	585	951			4.6								
	1.6	505	837			5.4	6.2	185	145.15			3.2	K 57 KF 57 KA 57 KAF57	6P
1.9	435	726	6.2	7.3	158	123.85	3.8							
0.51 0.58 0.67 0.78 0.91 0.99 1.1 1.3 1.5 1.7 2.0 2.2	1790	2717	0.85	K77 KF77 KA77 KAF77	R37 R37 R37 R37	8.3	138	108.29	4.3					
	0.58	1510	2370			1.05	8.8	131	102.88	4.6				
	0.67	1380	2050			1.10	10	115	90.26	5.2				
	0.78	1180	1772			1.30	12	98	76.26	6.2				
	0.91	1010	1514			1.55	9.5	121	145.14	5.0	K 57 KF 57 KA 57 KAF57	4P		
	0.99	920	1388			1.70	11	103	123.85	5.8				
	1.1	810	1218			1.90	13	90	108.29	6.7				
	1.3	710	1053			2.2	13	85	102.88	7.0				
1.5	620	924	2.5	15	75	90.26	8.0							
1.7	550	815	2.8	6.8	168	131.87	2.4	K 47 KF 47 KA 47 KAF47	6P					
2.0	440	709	3.5	7.4	155	121.48	2.6							
2.2	385	622	4.0	8.6	133	104.37	3.0							

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.12KW						0.18KW					
10	110	131.87	8140	K47	4P	1.4	1040	957	4.1	K97	R57
11	101	121.48	8170	KF47		1.5	930	855	4.6	KF97	R57
				KA47		1.8	755	743	5.7	KA97	R57
				KAF47		2.0	675	652	6.4	KAF97	R57
8.5	136	106.38	1.50	K 37	6P	0.42	3330	3107	0.80	K87 KF87 KA87 KAF87	R57 R57 R57 R57
9.2	125	97.81	1.60	KF 37		0.48	2880	2728	0.95		
11	107	83.69	1.90	KA 37		0.56	2520	2371	1.05		
12	92	72.54	2.2	KAF37		0.63	2290	2088	1.20		
13	88	106.38	2.3	K 37 KF 37 KA 37 KAF37	4P	0.71	2030	1854	1.35		
14	81	97.81	2.5			0.80	1820	1657	1.50		
16	70	83.69	2.9			0.93	1540	1415	1.75		
19	60	72.54	3.3			1.1	1340	1229	2.0		
20	56	67.80	3.5			1.2	1160	1078	2.3		
24	49	58.60	4.1			1.4	1000	951	2.7		
28	41	49.79	4.8			1.6	870	837	3.1		
31	37	44.46	5.4			1.8	755	726	3.6		
36	32	37.97	6.3			0.87	1670	1514	0.95	K77 KF77 KA77 KAF77	R37 R37 R37 R37
39	30	35.57	6.8			0.95	1530	1388	1.00		
46	25	29.96	8.0			1.1	1340	1218	1.15		
48	24	28.83	8.4			1.2	1170	1053	1.35		
55	21	24.99	9.6			1.4	1030	924	1.50		
59	19	23.36	10			1.6	910	815	1.70		
68	17	20.19	11			1.9	750	709	2.1		
80	14	17.15	13			2.1	655	622	2.4		
90	13	15.32	14			2.4	590	552	2.6		
105	11	13.08	15			2.7	515	485	3.0		
114	10	12.14	16			3.1	455	428	3.4		
						3.6	400	367	3.9		
0.18KW						1.5	980	903	0.85	K67 KF67 KA67 KAF67	R37 R37 R37 R37
0.09	16300	14975	0.80	K127 KF127 KA127 KAF127	R77 R77 R77 R77	1.7	890	793	0.90		
0.11	13400	12440	0.95			1.9	745	697	1.10		
0.12	11600	10915	1.10			2.2	655	613	1.25		
0.13	10500	9819	1.25			2.4	580	542	1.40		
0.16	8850	8443	1.45			2.8	520	471	1.60		
0.18	8040	7482	1.60			3.2	445	420	1.85		
0.20	6990	6565	1.85			3.7	395	361	2.1		
0.23	5940	5804	2.2			4.1	350	323	2.3		
0.26	5220	5027	2.5			4.7	295	279	2.8		
0.30	4530	4423	2.9			2.2	660	615	0.90	K57 KF57 KA57 KAF57	R37 R37 R37 R37
0.34	3960	3889	3.3	K107 KF107 KA107 KAF107	R77 R77 R77 R77	2.4	580	544	1.05		
0.40	3310	3311	3.9			2.8	515	473	1.15		
0.16	8990	8328	0.90			3.1	450	421	1.35		
0.18	7850	7270	1.00			3.6	395	362	1.50		
0.21	6420	6184	1.25			4.1	350	319	1.75		
0.23	5760	5662	1.40			4.7	300	280	2.0		
0.26	5230	5138	1.55			5.4	260	246	2.3		
0.30	4570	4359	1.75			6.1	230	215	2.6		
0.35	4000	3810	2.0			6.9	205	192	2.9		
0.39	3440	3358	2.3			7.9	178	166	3.4		
0.44	3090	2977	2.6	K97 KF97 KA97 KAF97	R57 R57 R57 R57	3.5	400	375	1.00	K47 KF47 KA47 KAF47	R37 R37 R37 R37
0.51	2700	2599	3.0			4.0	360	327	1.10		
0.58	2340	2286	3.4			4.6	315	289	1.25		
0.28	4960	4669	0.85			5.2	275	256	1.45		
0.32	4390	4082	1.00			5.9	245	225	1.65		
0.37	3860	3583	1.10			6.7	210	198	1.90		
0.42	3370	3108	1.25			7.7	183	171	2.2		
0.48	2910	2757	1.50			8.6	164	153	2.4		
0.55	2640	2419	1.65			10	142	131	2.8		
0.62	2290	2123	1.90			6.4	225	205	0.90	K37 KF37 KA37 KAF37	R17 R17 R17 R17
0.71	2030	1856	2.1	K97 KF97 KA97 KAF97	R57 R57 R57 R57	7.3	199	181	1.00		
0.81	1710	1625	2.5			8.2	175	160	1.15		
0.92	1490	1430	2.9			9.7	148	136	1.35		
1.0	1380	1261	3.1			10	140	127	1.45		
1.2	1210	1102	3.6								

上海赛岚传动设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.18KW						0.25KW					
6.0	285	144.79	2.9	K 67	6P	0.13	15300	9819	0.85	K127 KF127 KA127 KAF127	R77 R77 R77 R77
7.0	145	123.54	3.4	KF 67		0.15	13000	8443	1.00		
8.1	215	108.03	3.8	KA 67		0.17	11700	7482	1.10		
8.5	205	102.62	4.0	KAF 67		0.20	10200	6565	1.30		
9.1	189	144.79	4.3	K 67	4P	0.22	8770	5804	1.50		
11	161	123.54	5.1	KF 67		0.26	7670	5027	1.70		
12	141	108.03	5.8	KA 67		0.29	6680	4423	1.95		
				KAF 67		0.33	5850	3889	2.2		
						0.39	4930	3311	2.6		
6.0	285	145.15	2.1	K 57	6P	0.21	9440	6184	0.85	K107 KF107 KA107 KAF107	R77 R77 R77 R77
7.0	245	123.85	2.5	KF 57		0.23	8520	5662	0.95		
8.0	215	108.29	2.8	KA 57		0.25	7730	5138	1.05		
8.5	205	102.88	3.0	KAF 57		0.30	6700	4359	1.20		
9.6	178	90.26	3.4		4P	0.34	5850	3810	1.35		
						0.39	5070	3358	1.60		
9.1	189	145.15	3.2	K 57		0.44	4540	2977	1.75		
11	161	123.85	3.7	KF 57		0.50	3970	2599	2.0		
12	141	108.29	4.3	KA 57	6P	0.57	3450	2286	2.3	K97 KF97 KA97 KAF97	R57 R57 R57 R57
13	134	102.88	4.5	KAF 57		0.67	2930	1939	2.7		
15	118	90.26	5.1			0.76	2640	1713	3.0		
17	100	76.56	6.0			0.84	2390	1554	3.3		
6.6	260	131.87	1.55	K 47	6P	0.97	2060	1336	3.9		
7.2	240	121.48	1.65	KF 47		0.42	4890	3108	0.90	K87 KF87 KA87 KAF87	R57 R57 R57 R57
8.3	205	104.37	1.95	KA 47		0.47	4250	2757	1.00		
9.6	180	90.86	2.2	KAF 47		0.54	3840	2419	1.10		
10	168	85.12	2.4			0.61	3340	2123	1.30		
10	172	131.87	2.3	K 47	4P	0.70	2950	1856	1.45		
11	158	121.48	2.5	KF 47		0.80	2520	1625	1.70		
13	136	104.37	2.9	KA 47		0.91	2190	1430	1.95		
15	118	90.86	3.4	KAF 47		1.0	2010	1261	2.1		
16	111	85.12	3.6		6P	1.2	1750	1102	2.5	K77 KF77 KA77 KAF77	R37 R37 R37 R37
8.2	210	106.38	0.95	K 37		1.4	1520	957	2.8		
8.9	193	97.81	1.05	KF 37		1.5	1360	855	3.2		
10	165	83.69	1.20	KA 37		0.62	3320	2088	0.80		
12	143	72.54	1.40	KAF 37	4P	0.70	2950	1854	0.90		
12	139	106.38	1.45			0.78	2640	1657	1.00		
14	127	97.81	1.55			0.92	2250	1415	1.20		
16	109	83.69	1.85			1.1	1950	1229	1.40		
18	95	72.54	2.1			1.2	1700	1078	1.60		
19	88	67.80	2.3			1.4	1470	951	1.85		
23	76	58.60	2.6			1.5	1280	837	2.1		
27	65	49.79	3.1			1.8	1110	726	2.4		
30	58	44.46	3.5			2.0	990	638	2.7		
35	49	37.97	4.1	K 37	4P	1.2	1690	1053	0.90	K67 KF67 KA67 KAF67	R37 R37 R37 R37
37	46	35.57	4.3	KF 37		1.4	1480	924	1.05		
44	39	29.96	5.1	KA 37		1.6	1310	815	1.20		
46	38	28.83	5.3	KAF 37		1.8	1100	709	1.40		
53	33	24.99	6.2			2.1	960	622	1.60		
57	30	23.36	6.4			2.3	860	552	1.80		
65	26	20.19	7.0			2.7	755	485	2.0		
77	22	17.15	8.1			3.0	665	428	2.3		
86	20	15.31	8.8			3.5	580	367	2.7		
101	17	13.08	9.7			4.0	515	328	3.0		
109	16	12.14	10		4P	4.5	460	290	3.4	K67 KF67 KA67 KAF67	R37 R37 R37 R37
126	14	10.49	12			5.2	395	252	3.9		
148	12	8.91	14			5.9	345	221	4.5		
166	10	7.96	15			6.7	305	195	5.1		
						7.4	270	175	5.7		
						2.1	960	613	0.85	K67 KF67 KA67 KAF67	R37 R37 R37 R37
						2.4	850	542	0.95		
						2.8	755	471	1.10		
						3.1	655	420	1.25		
						3.6	575	361	1.45		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.25KW						0.25KW					
4.0	510	323	1.60	K67	R37	11	225	83.69	0.90	K 37 KF 37 KA 37 KAF 37	6P
4.7	430	279	1.90	KF67	R37	12	197	72.54	1.00		
5.3	385	246	2.1	KA67	R37	13	184	67.80	1.10		
6.0	335	217	2.4	KAF67	R37	15	159	58.60	1.25		
3.1	655	421	0.90	K57 KF57 KA57 KAF57	R37	18	135	49.79	1.50	K 37 KF 37 KA 37 KAF 37	4P
3.6	575	362	1.05			12	195	106.38	1.00		
4.1	505	319	1.20			13	180	97.81	1.10		
4.7	435	280	1.35			16	154	83.69	1.30		
5.3	385	246	1.55			18	133	72.54	1.50		
6.1	335	215	1.80			19	125	67.80	1.60		
6.8	300	192	2.0			22	108	58.60	1.85		
7.8	260	166	2.3			26	91	49.79	2.2		
9.0	225	145	2.7			29	82	44.46	2.5		
10	205	129	2.9			34	70	37.97	2.9		
12	173	111	3.5	37	65	35.57	3.1	K 37 KF 37 KA 37 KAF 37	4P		
13	152	97	4.0	43	55	29.96	3.6				
4.4	540	154.02	2.9	45	53	28.83	3.8				
5.0	475	135.28	3.3	52	46	24.99	4.4				
5.3	450	128.52	3.4	56	43	23.36	4.6				
6.0	400	113.56	3.9	64	37	20.19	5.0				
4.6	520	192.18	2.8	76	32	17.15	5.7				
4.9	485	179.37	3.0	85	28	15.32	6.2				
5.7	420	154.02	3.7	99	24	13.08	6.9				
6.5	365	135.28	4.2	107	22	12.14	7.2				
5.5	435	123.54	1.90	K 67 KF 67 KA 67 KAF 67	8P	124	19	10.49	8.3		
6.3	380	108.03	2.2			146	16	8.91	9.8		
6.6	360	102.62	2.3			163	15	7.96	11		
7.6	315	90.04	2.6			191	13	6.80	12		
6.1	395	144.79	2.1	K 67 KF 67 KA 67 KAF 67	6P	204	12	6.37	12		
7.1	335	123.54	2.5			0.37KW					
8.1	295	108.03	2.8			0.18	16600	7482	0.80	K127 KF127 KA127 KAF127	R77 R77 R77 R77
8.6	280	102.62	3.0			0.21	14500	6565	0.90		
9.0	265	144.79	3.1	0.24	12600	5804	1.05				
11	225	123.54	3.6	.0.27	11000	5027	1.20				
12	198	108.03	4.1	K 67 KF 67 KA 67 KAF 67	4P	0.31	9610	4423	1.35		
13	189	102.62	4.3			0.35	8430	3889	1.55		
6.1	395	145.15	1.50			0.42	7120	3311	1.85		
7.1	335	123.85	1.80			0.72	4230	1926	3.1		
8.1	295	108.29	2.0	K 57 KF 57 KA 57 KAF 57	6P	0.79	3860	1757	3.4		
8.6	280	102.88	2.2			0.90	3360	1541	3.9		
9.8	245	90.26	2.5			0.36	8380	3810	0.95		
11	210	76.56	2.9			0.41	7300	3358	1.10		
9.0	265	145.15	2.2	K 57 KF 57 KA 57 KAF 57	4P	0.46	6510	2977	1.25		
11	225	123.85	2.6			0.53	5690	2599	1.40		
12	199	108.29	3.0			0.60	4970	2286	1.60		
13	189	102.88	3.2			0.71	4210	1939	1.90		
14	166	90.26	3.6	K 47 KF 47 KA 47 KAF 47	6P	0.81	3790	1713	2.1		
17	141	76.56	4.3			0.89	3440	1554	2.3		
6.7	360	131.87	1.10			1.0	2950	1336	2.7		
7.2	330	121.48	1.20			1.2	2580	1166	3.1		
8.4	285	104.37	1.40	K 47 KF 47 KA 47 KAF 47	6P	0.65	4770	2123	0.90		
9.7	245	90.86	1.60			0.74	4200	1856	1.00		
10	230	85.12	1.75			0.85	3610	1625	1.20		
9.9	240	131.87	1.65			0.96	3160	1430	1.35		
11	225	121.48	1.80	K 47 KF 47 KA 47 KAF 47	4P	1.1	2850	1261	1.50		
12	192	104.37	2.1			1.2	2490	1102	1.70		
14	167	90.86	2.4			1.4	2160	957	2.0		
15	156	85.12	2.6			1.6	1930	855	2.2		
						1.9	1620	743	2.7		
						2.1	1430	652	3.0		
						2.4	1280	573	3.4		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.37KW						0.37KW					
0.97	3200	1415	0.85			7.2	490	192.18	3.0	K 77	4P
1.1	2770	1229	0.95			7.7	460	179.37	3.2	KF 77	
1.3	2420	1078	1.10			9.0	395	154.02	3.9	KA 77	
1.5	2110	951	1.30							KAF 77	
1.6	1850	837	1.45								8P
1.9	1600	726	1.70	K87	R57	6.3	560	108.03	1.45	K 67	
2.2	1420	638	1.90	KF87	R57	6.6	535	102.32	1.55	KF 67	
2.5	1240	562	2.2	KA87	R57	7.6	470	90.04	1.75	KA 67	
2.9	1040	474	2.6	KAF87	R57					KAF 67	6P
3.2	940	426	2.9			7.3	485	123.54	1.70	K 67	
3.7	810	373	3.3			8.3	425	108.03	1.95	KF 67	
						8.8	405	102.62	2.0	KA 67	
						10	355	90.04	2.3	KAF 67	4P
1.7	1860	815	0.85			9.5	370	144.79	2.2	K 67	
2.0	1580	709	1.00			11	315	123.54	2.6	KF 67	
2.2	1380	622	1.10			13	275	108.03	3.0	KA 67	
2.5	1230	552	1.25			15	230	90.04	3.6	KAF 67	6P
2.8	1080	485	1.45			18	196	76.37	4.2		
3.2	950	428	1.60	K77	R37	7.3	485	123.85	1.25	K 57	
3.8	830	367	1.85	KF77	R37	8.3	425	108.29	1.40	KF 57	
4.2	735	328	2.1	KA77	R37	8.8	405	102.88	1.50	KA 57	4P
4.8	655	290	2.4	KAF77	R37	10	355	90.26	1.70	KAF 57	
5.5	565	252	2.8			12	300	76.56	2.0		
6.2	495	221	3.1			13	270	69.12	2.2		
7.1	435	195	3.5			9.5	370	145.15	1.60	K 57	6P
7.9	390	175	4.0			11	315	123.85	1.90	KF 57	
9.0	340	154	4.5			13	275	108.29	2.2	KA 57	
						13	265	102.88	2.3	KAF 57	
						15	230	90.26	2.6		4P
						18	196	76.56	3.1		
						20	177	69.12	3.4		
						8.6	410	104.37	1.00	K 47	
						9.9	355	90.86	1.10	KF 47	6P
						11	335	85.12	1.20	KA 47	
						12	295	75.20	1.35	KAF 47	
						10	340	131.87	1.20		
						11	310	121.48	1.30		4P
						13	265	104.37	1.50	K 47	
						15	235	90.86	1.70	KF 47	
						16	220	85.12	1.85	KA 47	
						18	193	75.20	2.1	KAF 47	4P
						20	179	69.84	2.2		
						22	162	63.30	2.5		
						14	250	97.81	0.80		
						16	215	83.69	0.95		4P
						19	186	72.54	1.10		
						20	174	67.80	1.15		
						24	150	58.60	1.35		
						28	128	49.79	1.55		8P
						31	114	44.46	1.75	K 37	
						36	97	37.97	2.1	KF 37	
						39	91	35.57	2.2	KA 37	
						46	77	29.96	2.6	KAF 37	6P
						48	74	28.83	2.7		
						55	64	24.99	3.1		
						59	60	23.36	3.3		
						68	52	20.19	3.6		6P
						80	44	17.15	4.1		
						90	39	15.32	4.5		
						105	34	13.08	4.9		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.37KW						0.55KW							
114	31	12.14	5.1	K 37 KF 37 KA 37 KAF 37	4P	1.4	3260	951	0.85	K87 KF87 KA87 KAF87	R57 R57 R57 R57		
132	27	10.49	5.9			1.6	2860	837	0.95				
155	23	8.91	7.0			1.9	2480	726	1.10				
173	20	7.96	7.6			2.1	2190	638	1.25				
203	17	6.80	8.6			2.4	1920	562	1.40				
217	16	6.37	8.9			2.9	1620	474	1.65				
257	14	5.36	10			3.2	1450	426	1.85				
0.55KW						3.7	1260	373	2.1				
0.08	55900	16978	0.90	K187 KA187	R97 R97	4.1	1110	330	2.4				
0.10	46500	14272	1.10			4.6	990	294	2.7				
0.10	42500	13116	1.20			5.4	850	250	3.2				
0.12	37400	11647	1.35			5.8	800	236	3.4				
0.19	23900	7343	2.1			6.8	680	201	4.0				
0.12	38400	11573	0.85	K167 KA167	R97 R97	2.5	1900	552	0.80	K77 KF77 KA77 KAF77	R37 R37 R37 R37		
0.13	33800	10264	0.95			2.8	1670	485	0.95				
0.16	28100	8628	1.15			3.2	1470	428	1.05				
0.21	21400	6562	1.50			3.7	1270	367	1.20				
0.25	17200	5355	1.85			4.2	1130	328	1.35				
0.33	13200	4079	2.4			4.7	1000	290	1.55				
						5.4	870	252	1.80				
0.20	22400	6881	0.80	K157 KF157 KA157 KAF157	R97 R97 R97 R97	6.2	760	221	2.0				
0.23	19300	5931	0.95			7.0	670	195	2.3				
0.34	13000	3979	1.40			7.8	600	175	2.6				
0.45	9940	3051	1.80			8.8	530	154	2.9				
0.31	14900	4423	0.85	K127 KF127 KA127 KAF127	R77 R77 R77 R77	4.9	960	279	0.85	K67 KF67 KA67 KAF67	R37 R37 R37 R37		
0.35	13000	3889	1.00			5.5	840	246	0.95				
0.41	11100	3311	1.20			6.2	745	217	1.10				
0.45	10000	3009	1.30			7.1	660	191	1.25				
0.52	8630	2607	1.50			8.2	570	166	1.45				
0.71	6560	1926	2.0			9.4	495	144	1.65				
0.77	5980	1757	2.2			11	420	122	1.95				
0.88	5220	1541	2.5										
1.0	4570	1342	2.8			7.1	660	192	0.90			K57 KF57 KA57 KAF57	R37 R37 R37 R37
1.2	3990	1177	3.3			8.2	575	166	1.05				
1.3	3490	1025	3.7	9.4	495	145	1.20						
				11	445	129	1.35						
				12	380	111	1.60						
0.46	10100	2977	0.80	K107 KF107 KA107 KAF107	R77 R77 R77 R77	14	335	97	1.80	K 87 KF 87 KA 87 KAF 87	8P		
0.52	8770	2599	0.90			3.9	1350	174.19	2.0				
0.59	7690	2286	1.05			4.1	1270	164.34	2.1				
0.70	6520	1939	1.25			4.6	1140	147.32	2.4				
0.79	5850	1713	1.35							K 87 KF 87 KA 87 KAF 87	6P		
0.87	5310	1554	1.50			4.6	1150	197.37	2.3				
1.0	4570	1336	1.75			5.2	1020	174.19	2.7				
1.2	3990	1166	2.0			5.5	960	164.34	2.8				
1.3	3450	1030	2.3			6.1	860	147.33	3.1	K 77 KF 77 KA 77 KAF 77	8P		
1.5	3000	904	2.7			5.0	1040	135.28	1.50				
1.7	2700	793	3.0			5.3	990	128.52	1.55				
2.0	2360	696	3.4			6.0	880	113.56	1.75				
2.2	2050	615	3.9	7.0	750	97.05	2.1						
0.95	4880	1430	0.90	K97 KF97 KA97 KAF97	R57 R57 R57 R57	5.8	900	154.02	1.70	K 77 KF 77 KA 77 KAF 77	6P		
1.1	4380	1261	1.00			6.7	790	135.28	1.95				
1.2	3820	1102	1.15			7.0	750	128.52	2.1				
1.4	3320	957	1.30			7.9	665	113.56	2.3				
1.6	2960	855	1.45			8.8	595	154.02	2.6	K 77 KF 77 KA 77 KAF 77	4P		
1.8	2520	743	1.70			10	520	135.28	3.0				
2.1	2220	652	1.95			11	495	128.52	3.1				
2.4	1970	573	2.2			12	440	113.56	3.5				
2.7	1700	504	2.5			14	375	97.05	4.1				
3.1	1470	437	2.9										
3.6	1300	382	3.3										
4.5	1040	305	4.1										

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.55KW						0.75KW					
7.3	720	123.54	1.15	K 67	6P	0.16	38600	8628	0.85	K167 KA167	R97 R97 4P
8.3	630	108.03	1.30	KF 67		0.21	29300	6562	1.10		
8.8	600	102.62	1.35	KA 67		0.26	23700	5355	1.35		
10	525	90.04	1.55	KAF 67		0.34	18200	4079	1.75		
12	445	76.37	1.85			0.41	15100	3376	2.1		
11	475	123.54	1.70	K 67	4P	0.35	17800	3979	1.00	K157 KF157 KA157 KAF157	R97 R97 4P R97 R97
13	415	108.03	1.95	KF 67		0.45	13600	3051	1.30		
15	350	90.04	2.4	KA 67		0.83	7440	1659	2.4		
18	295	76.37	2.8	KAF 67		1.0	6040	1365	3.0		
8.3	630	108.29	0.95	K 57 KF 57 KA 57 KAF 57	6P	0.42	15100	3311	0.85	K127 KF127 KA127 KAF127	R77 R77 4P R77 R77
8.8	600	102.88	1.00			0.46	13700	3009	0.95		
10	525	90.26	1.15			0.53	11800	2607	1.10		
12	445	76.56	1.35			0.72	8930	1926	1.45		
13	405	69.12	1.50			0.79	8150	1757	1.60		
15	355	60.81	1.70			0.90	7120	1541	1.85		
16	335	57.42	1.80			1.0	6220	1342	2.1		
11	480	123.85	1.25	K 57 KF 57 KA 57 KAF 57	4P	1.2	5440	1177	2.4	K107 KF107 KA107 KAF107	R77 R77 4P R77 R77
13	420	108.29	1.45			1.4	4750	1025	2.7		
13	395	102.88	1.50			1.5	4150	899	3.1		
15	350	90.26	1.70			0.81	7960	1713	1.00		
18	295	76.56	2.0			0.89	7230	1554	1.10		
20	265	69.12	2.2			1.0	6210	1336	1.30		
22	235	60.81	2.6			1.2	5420	1166	1.50		
24	220	57.42	2.7	1.3	4710	1030	1.70				
13	405	104.37	1.00	K 47 KF 47 KA 47 KAF 47	4P	1.5	4120	904	1.95	K97 KF97 KA97 KAF97	R57 R57 4P R57 R57
15	350	90.86	1.15			1.7	3680	793	2.2		
16	330	85.12	1.20			2.0	3210	696	2.5		
18	290	75.20	1.40			2.2	2800	615	2.8		
19	270	69.84	1.50			1.2	5180	1102	0.85		
21	245	63.30	1.65			1.4	4490	957	0.95		
24	220	56.83	1.80			1.6	4020	855	1.05		
28	189	48.95	2.1	1.9	3430	743	1.25				
30	178	46.04	2.2	2.1	3020	652	1.40				
23	225	58.60	0.90	K 37 KF 37 KA 37 KAF 37	4P	2.4	2680	573	1.60	K87 KF87 KA87 KAF87	R57 R57 4P R57 R57
27	192	49.79	1.05			2.7	2320	504	1.85		
31	172	44.46	1.15			3.2	2010	437	2.1		
36	147	37.97	1.35			3.6	1770	382	2.4		
38	137	35.57	1.45			4.5	1420	305	3.0		
45	116	29.96	1.75			5.4	1190	258	3.6		
47	111	28.83	1.80			5.9	1080	232	4.0		
54	97	24.99	2.1	6.9	920	199	4.7				
58	90	23.36	2.2	1.9	3370	726	0.80	K77 KF77 KA77 KAF77	R37 R37 4P R37 R37		
67	78	20.19	2.4	2.2	2970	638	0.90				
79	66	17.15	2.7	2.5	2610	562	1.05				
89	59	15.32	3.0	2.9	2200	474	1.25				
104	51	13.08	3.3	3.2	1980	426	1.35				
112	47	12.14	3.4	3.7	1720	373	1.55				
130	41	10.49	4.0	4.2	1520	330	1.80				
153	34	8.91	4.7	4.7	1350	294	2.0	K 97 KF 97 KA 97 KAF 97	8P		
171	31	7.96	5.1	5.5	1160	250	2.3				
200	26	6.80	5.7	5.8	1100	236	2.5				
214	25	6.37	5.9	6.9	930	201	2.9				
254	21	5.36	6.8	3.8	1720	367	0.90				
0.75KW						4.2	1540			328	1.00
0.11	58400	13116	0.85	K187 KA187	R97 4P	4.8	1360			290	1.15
0.12	51500	11647	0.95			5.5	1180	252	1.30		
0.19	32800	7343	1.50			6.2	1030	221	1.50		
0.20	30000	6747	1.65			3.9	1830	176.05	2.3		
0.23	26500	5991	1.90			4.5	1590	153.21	2.7		
						4.9	1460	140.28	3.0		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	
0.75KW						0.75KW						
4.7	1530	147.32	1.75	K 87	8P	155	46	8.91	3.5	K 37	4P	
5.4	1320	126.91	2.0	KF 87		173	41	7.96	3.8	KF 37		
6.0	1200	115.82	2.2	KA 87		203	35	6.80	4.2	KA 37		
6.7	1070	102.71	2.5	KAF 87		217	33	6.37	4.4	KAF 37		
					257	28	5.36	5.0				
5.2	1390	174.19	1.95	K 87	6P	1.1KW						
5.5	1310	164.34	2.1	KF 87		0.15	60700	9363	0.80	K187 KA187	R97 R97	4P
6.1	1170	147.32	2.3	KA 87		0.17	52400	8126	0.95			
7.1	1010	126.91	2.7	KAF 87		0.19	48300	7343	1.05			
					0.21	44300	6747	1.15				
7.0	1020	197.37	2.6	K 87	4P	0.23	39200	5991	1.30			
7.9	900	174.19	3.0	KF 87		0.26	34900	5358	1.45			
8.4	850	164.34	3.2	KA 87		0.29	31200	4817	1.60			
9.4	765	147.32	3.5	KAF 87		0.32	28300	4370	1.75			
6.7	1080	135.28	1.45	K 77 KF 77 KA 77 KAF 77	6P	0.26	35000	5355	0.90	K157 KA157	R97 R97	4P
7.0	1020	128.52	1.50			0.29	31200	4788	1.05			
7.9	900	113.56	1.70			0.34	26800	4079	1.20			
9.3	770	97.05	2.0			0.41	22200	3376	1.45			
10	710	88.97	2.2			0.51	18000	2755	1.80			
9.0	800	154.02	1.95	K 77 KF 77 KA 77 KAF 77	4P	0.64	14600	2182	2.2			
10	700	135.28	2.2			0.82	11300	1704	2.8			
11	665	128.52	2.3			0.99	9330	1408	3.4			
12	590	113.56	2.6			1.1	8560	1296	3.7			
14	505	97.05	3.1									
11	640	123.54	1.30	K 67 KF 67 KA 67 KAF 67	4P	0.40	22900	3516	0.80	K157 KF157 KA157 KAF157	R97 R97 R97 R97	4P
13	560	108.03	1.45			0.46	20100	3051	0.90			
15	465	90.04	1.75			0.54	16900	2610	1.05			
18	395	76.37	2.1			0.60	15100	2322	1.20			
20	360	68.95	2.3			0.84	11000	1659	1.65			
23	315	60.66	2.6			1.0	8970	1365	2.0			
24	295	57.28	2.8	KAF 67	1.1	8030	1229	2.2	K127 KF127 KA127 KAF127	R77 R77 R77 R77	4P	
					1.3	7150	1093	2.5				
					1.5	6160	942	2.9				
					1.6	5550	854	3.2				
11	645	123.85	0.95	K 57 KF 57 KA 57 KAF 57	4P	0.73	13100	1926	1.00	K127 KF127 KA127 KAF127	R77 R77 R77 R77	4P
13	560	108.29	1.05			0.80	11900	1757	1.10			
13	535	102.88	1.10			0.91	10400	1541	1.25			
15	470	90.26	1.30			1.0	9100	1342	1.45			
18	395	76.56	1.50			1.2	7960	1177	1.65			
20	360	69.12	1.65			1.4	6950	1025	1.85			
23	315	60.81	1.920	KAF 57	1.6	6080	899	2.1	K107 KF107 KA107 KAF107	R77 R77 R77 R77	4P	
24	300	57.42	2.0	1.8	5270	790	2.5					
28	255	48.89	2.4	2.0	4740	704	2.7					
31	230	44.43	2.6	2.3	4090	610	3.2					
				2.5	3690	549	3.5					
18	390	75.20	1.00	K 47 KF 47 KA 47 KAF 47	4P	2.9	3180	477	4.1	K97 KF97 KA97 KAF97	R57 R57 R57 R57	4P
20	365	69.84	1.10			1.2	7920	1166	1.00			
22	330	63.30	1.20			1.4	6920	1030	1.15			
24	295	56.83	1.35			1.5	6050	904	1.30			
28	255	48.95	1.55			1.8	5380	793	1.50			
30	240	46.04	1.65			2.0	4700	696	1.70			
35	205	39.61	1.95	KA 47	2.3	4120	615	1.95	K87 KF87 KA87 KAF87	R47 R47 R47 R47	4P	
39	184	35.39	2.2	KAF 47	2.7	3500	522	2.3				
44	162	31.30	2.5		3.0	3080	461	2.6				
					3.4	2720	408	2.9				
					3.8	2450	364	3.3				
31	230	44.46	0.85	K 37 KF 37 KA 37 KAF 37	4P	4.4	2140	318	3.7	K77 KF77 KA77 KAF77	R37 R37 R37 R37	4P
36	197	37.97	1.00			1.9	5030	743	0.85			
39	185	35.57	1.10			2.2	4420	652	0.95			
46	156	29.96	1.30			2.4	3910	573	1.10			
48	150	28.83	1.35			2.8	3400	504	1.25			
55	130	24.99	1.55			3.2	2940	437	1.45			
59	121	23.36	1.60			3.7	2590	382	1.65			
68	105	20.19	1.75	KA 37	4.1	2300	342	1.85	K67 KF67 KA67 KAF67	R27 R27 R27 R27	4P	
80	89	17.15	2.0									
90	80	15.32	2.2									
105	68	13.08	2.4									
114	63	12.14	2.5									
132	54	10.49	2.9									

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
1.1KW						1.1KW					
3.0	3220	474	0.85			58	181	24.05	3.3		
3.3	2890	426	0.95			62	170	22.71	3.5		
3.8	2520	373	1.05	K87	R57	72	145	19.34	4.0		
4.2	2230	330	1.20	KF87	R57	80	132	17.57	4.2		
4.8	1980	294	1.35	KA87	R57	92	114	15.22	4.7	K 57	
5.6	1700	250	1.60	KAF87	R57	106	99	13.25	5.1	KF 57	4P
5.9	1600	236	1.70			117	90	11.92	4.6	KA 57	
7.0	1360	201	2.0			124	85	11.26	4.9	KAF 57	
						146	72	9.59	5.6		
3.9	2720	176.05	1.60	K 97		161	65	8.71	6.0		
4.4	2370	153.21	1.80	KF 97	8P	186	57	7.55	6.4		
4.8	2170	140.28	2.0	KA 97		213	49	6.57	7.0		
5.5	1910	123.93	2.2	KAF 97							
5.2	2010	176.05	2.1	K 97		25	425	56.83	0.95		
6.0	1750	153.21	2.5	KF 97	6P	29	265	48.95	1.10		
6.6	1600	140.28	2.7	KA 97		30	345	46.04	1.15	K 47	
7.4	1420	123.93	3.0	KAF 97		35	295	39.61	1.35	KF 47	4P
						40	265	35.39	1.50	KA 47	
7.9	1320	176.05	3.3	K 97		45	235	31.30	1.70	KAF 47	
9.1	1150	153.21	3.7	KF 97	4P	48	220	29.32	1.80		
10	1050	140.28	4.1	KA 97		54	194	25.91	2.1		
				KAF 97		64	164	21.81	2.4		
						72	147	19.58	2.7		
5.3	1990	174.19	1.35	K 87		47	225	29.96	0.90		
5.6	1880	164.34	1.45	KF 87	6P	56	188	24.99	1.05		
6.2	1680	147.33	1.60	KA 87		60	175	23.36	1.10		
7.2	1450	126.91	1.85	KAF 87		69	152	20.19	1.20		
						82	129	17.15	1.40		
8.0	1310	174.19	2.1	K 87		91	115	15.32	1.50	K 37	
8.5	1230	164.34	2.2	KF 87	4P	107	98	13.08	1.70	KF 37	4P
9.5	1110	147.32	2.4	KA 87		115	91	12.14	1.75	KA 37	
11	950	126.91	2.8	KAF 87		133	79	10.49	2.0	KAF 37	
12	870	115.82	3.1			157	67	8.91	2.4		
						176	60	7.96	2.6		
6.8	1540	135.28	1.00	K 77		206	51	6.80	2.9		
7.2	1470	128.52	1.05	KF 77	6P	220	48	6.37	3.0		
8.1	1300	113.56	1.20	KA 77		261	40	5.36	3.5		
9.5	1110	97.05	1.40	KAF 77							
10	1020	135.28	1.55			1.5KW					
11	960	128.52	1.60			0.21	60700	6747	0.80		
12	850	113.56	1.80	K 77		0.24	53700	5991	0.95		
14	730	97.05	2.1	KF 77	4P	0.26	47900	5358	1.05		
16	670	88.97	2.3	KA 77		0.29	42900	4817	1.15	K187	R97
18	585	78.07	2.7	KAF 77		0.32	38900	4370	1.30	KA187	R97
19	555	73.99	2.8			0.39	33000	3609	1.50		4P
						0.46	27800	3062	1.80		
13	810	108.03	1.00			0.56	22800	2519	2.2		
14	770	102.62	1.05			0.62	20400	2268	2.5		
16	675	90.04	1.20								
18	575	76.37	1.45			0.35	36700	4079	0.85		
20	515	68.95	1.60			0.42	30400	3376	1.05		
23	455	60.66	1.80	K 67		0.51	24700	2755	1.30		
24	430	57.28	1.90	KF 67	4P	0.65	19900	2182	1.60	K167	R97
29	365	48.77	2.2	KA 67		0.83	15500	1704	2.1	KA167	R97
32	335	44.32	2.5	KAF 67		1.0	12800	1408	2.5		4P
36	290	38.39	2.8			1.1	11800	1296	2.7		
16	675	90.26	0.90			0.61	20700	2322	0.85		
18	575	76.56	1.05			0.85	15100	1659	1.20		
20	520	69.12	1.15			1.0	12300	1365	1.45		
23	455	60.81	1.30			1.1	11100	1229	1.65	K157	R97
24	430	57.42	1.40	K 57		1.3	9840	1093	1.85	KF157	R97
29	365	48.89	1.65	KF 57	4P	1.5	8480	942	2.1	KA157	R97
32	335	44.43	1.80	KA 57		1.6	7650	854	2.3	KAF157	R97
36	290	38.49	2.1	KAF 57		2.5	5050	567	3.6		
39	270	35.70	2.2			2.8	4490	504	4.0		
46	225	30.28	2.6								
51	205	27.34	2.9								

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
1.5KW						1.5KW					
2.6	4820	536	2.7	K127	R87	6.2	2290	147.33	1.20	K 87	6P
3.4	3770	418	3.5	KF127	R87	7.2	1980	126.91	1.35	KF 87	
3.8	3330	367	3.9	KA127	R87	7.9	1800	115.82	1.50	KA 87	
				KAF127	R87	9.0	1600	102.71	1.70	KAF 87	
0.80	16200	1757	0.80	K127	R77	8.1	1770	174.19	1.55	K 87	4P
0.91	14200	1541	0.90			8.6	1670	164.34	1.60		
1.0	12400	1342	1.05			9.6	1500	147.32	1.80		
1.2	10900	1177	1.20			11	1290	126.91	2.1		
1.4	9470	1025	1.35			12	1180	115.82	2.3		
1.6	8300	899	1.55			14	1040	102.71	2.6	KAF 87	
1.8	7210	790	1.80			16	880	86.34	3.1		
2.0	6480	704	2.0								6P
2.3	5590	610	2.3			8.1	1770	113.56	0.90	K 77	
2.6	5040	549	2.6			9.5	1510	97.05	1.05	KF 77	
3.0	4360	477	3.0			10	1390	88.97	1.10	KA 77	
3.4	3840	418	3.4			12	1220	78.07	1.30	KAF 77	
1.4	9460	1030	0.85	K107	R77	10	1370	135.28	1.15	K 77	4P
1.6	8280	904	0.95			11	1310	128.52	1.20		
1.8	7330	793	1.10			12	1150	113.56	1.35		
2.0	6420	696	1.25			15	990	97.05	1.55		
2.3	5640	615	1.40			16	900	88.97	1.70		
2.7	4780	522	1.65			18	795	78.07	1.95		
3.1	4210	461	1.90			19	750	73.99	2.1		
3.5	3720	408	2.2			22	660	64.76	2.4		
3.9	3350	364	2.4			24	595	58.34	2.6		
4.4	2920	318	2.7			28	520	51.18	3.0		
2.5	5320	573	0.80	K97	R57	31	460	45.16	3.4	K 67	4P
2.8	4650	504	0.95			35	405	40.04	3.8		
3.2	4020	437	1.05			16	910	90.04	0.90		
3.7	3540	382	1.20			18	775	76.37	1.05		
4.1	3140	342	1.35			20	700	68.95	1.15		
4.6	2820	305	1.50			23	615	60.66	1.35		
5.5	2380	258	1.80			25	580	57.28	1.40		
6.1	2140	232	2.0			29	495	48.77	1.65		
7.1	1840	199	2.3	K87	R57	32	450	44.32	1.80	K 67	4P
4.3	3040	330	0.90			37	390	38.39	2.0		
4.8	2700	294	1.00			40	360	35.62	2.3		
5.6	2310	250	1.15			47	305	30.22	2.7		
6.0	2180	236	1.25			52	275	27.28	3.0		
7.0	1860	201	1.45			59	245	24.00	3.3		
7.7	1690	183	1.60			23	620	60.81	0.95	K 57	4P
4.9	2940	143.47	2.7	K 107	R57	25	585	57.42	1.05		
5.8	2490	121.46	3.2			29	495	48.89	1.20		
6.2	2300	112.41	3.5			32	450	44.43	1.35		
						37	390	38.49	1.55		
4.6	3140	153.21	1.35	K 97	R57	39	365	35.70	1.65		
5.0	2870	140.28	1.50			47	310	30.28	1.95		
5.7	2540	123.93	1.70			52	280	27.34	2.2		
						59	245	24.05	2.5		
5.2	2740	176.05	1.55	K 97	R57	62	230	22.71	2.6		
6.0	2390	153.21	1.80			73	196	19.34	2.9		
6.6	2180	140.28	1.95			36	400	39.61	1.00	K 47	4P
7.4	1930	123.93	2.2			40	360	35.39	1.10		
8.0	1790	176.05	2.4	K 97	R57	45	320	31.30	1.25		
9.2	1560	153.21	2.8			48	300	29.32	1.35		
10	1430	140.28	3.0			54	265	25.91	1.50		
11	1260	123.93	3.4			65	220	21.81	1.80		
						72	199	19.58	2.0		
						84	171	16.86	2.2		
						89	161	15.86	2.4		
						103	139	13.65	2.6		
						116	124	12.19	2.8		
						120	120	11.77	2.3		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
1.5KW						2.2KW					
60	235	23.36	0.80	K 37 KF 37 KA 37 KAF 37	4P	3.7	5210	382	0.80	K97 KF97 KA97 KAF97	R57 R57 R57 R57
70	205	20.19	0.90			4.1	4640	342	0.95		
82	174	17.15	1.05			4.6	4170	305	1.05		
92	156	15.32	1.10			5.5	3510	258	1.20		
108	133	13.08	1.25			6.1	3160	232	1.35		
116	123	12.14	1.30			7.1	2710	199	1.60		
134	107	10.49	1.50			4.9	4310	143.47	1.85	K 107 KF 107 KA 107 KAF 107	8P
158	91	8.91	1.75			5.8	3650	121.46	2.2		
177	81	7.96	1.90			6.2	3370	112.41	2.4		
207	69	6.80	2.2			6.9	3020	100.75	2.7		
221	65	6.37	2.2	K187 KA187	R97 R97 4P	6.1	3420	153.21	1.25	K 97 KF 97 KA 97 KAF 97	6P
263	55	5.36	2.6			6.7	3140	140.28	1.35		
0.32	57900	4370	0.85			7.6	2770	123.93	1.55		
0.50	37000	2818	1.35			8.9	2350	105.13	1.85		
0.39	48800	3609	1.00			8.0	2620	176.05	1.65	K 97 KF 97 KA 97 KAF 97	4P
0.46	41300	3062	1.20			9.2	2280	153.21	1.90		
0.56	33800	2519	1.50			10	2090	140.28	2.1		
0.62	30400	2268	1.65			11	1850	123.93	2.3		
0.69	27400	2054	1.80			13	1570	105.13	2.8		
0.77	24200	1821	2.1			15	1440	96.80	3.0		
0.88	21400	1605	2.3	K167 KA167	R97 R97 4P	9.6	2200	147.32	1.25	K 87 KF 87 KA 87 KAF 87	4P
0.51	36600	2755	0.85			11	1890	126.91	1.45		
0.62	29800	2263	1.05			12	1730	115.82	1.55		
0.65	29500	2182	1.10			14	1530	102.71	1.75		
0.83	22900	1704	1.40			16	1290	86.34	2.1		
1.0	19000	1408	1.70			18	1180	79.34	2.3		
1.1	17400	1296	1.85			20	1050	70.46	2.6		
1.3	14700	1101	2.2			22	940	63.00	2.9		
1.5	12600	944	2.5	K157 KF157 KA157 KAF157	R97 R97 R97 R97 4P	12	1690	113.56	0.90	K 77 KF 77 KA 77 KAF 77	4P
0.85	22400	1659	0.80			15	1450	97.05	1.05		
1.0	18300	1365	1.00			16	1330	88.97	1.15		
1.1	16500	1229	1.10			18	1160	78.07	1.35		
1.3	14600	1093	1.25			19	1100	73.99	1.40		
1.5	12600	942	1.45			22	960	64.76	1.60		
1.6	11400	854	1.60			24	870	58.34	1.80		
1.9	9990	756	1.80			28	765	51.18	2.0		
2.6	7180	536	1.80	K127 KF127 KA127 KAF127	R87 R87 R87 R87 4P	31	675	45.16	2.3		
3.0	6310	473	2.1			35	595	40.04	2.6		
3.4	5600	418	2.3			40	525	35.19	3.0		
3.8	4950	367	2.6			46	460	30.88	3.4		
4.3	4440	330	2.9			48	435	29.26	3.6		
1.4	14000	1025	0.95	K127 KF127 KA127 KAF127	R77 R77 R77 R77 4P	55	380	25.61	4.1		
1.6	12200	899	1.05			23	900	60.66	0.90	K 67 KF 67 KA 67 KAF 67	4P
1.8	10700	790	1.20			25	850	57.28	0.95		
2.0	9580	704	1.35			29	725	48.77	1.15		
2.3	8280	610	1.55			32	660	44.32	1.25		
2.6	7460	549	1.75			37	570	38.39	1.40		
3.0	6460	477	2.0			40	530	35.61	1.55		
3.4	5680	418	2.3	K107 KF107 KA107 KAF107	R77 R77 R77 R77 4P	47	450	30.21	1.80		
2.3	8340	615	0.95			52	405	27.27	2.0		
2.7	7070	522	1.15			59	360	23.99	2.2		
3.1	6230	461	1.30			62	340	22.66	2.3		
3.5	5520	408	1.45			73	285	19.29	2.6		
3.9	4940	364	1.60			80	260	17.53	2.8		
4.4	4320	318	1.85			93	225	15.19	3.1		
4.9	3890	286	2.1			107	197	13.22	3.4		
5.6	3410	251	2.3			113	186	12.48	2.8		
						133	158	10.63	3.2		
						146	144	9.66	3.3		
						169	125	8.37	3.5		
						194	109	7.28	3.9		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	
2.2KW						3.0KW						
32	660	44.43	0.90	K 57 KF 57 KA 57 KAF 57	4P	1.8	14800	790	0.90	K127 KF127 KA127 KAF127	R77 R77 R77 R77	
37	575	38.49	1.05			2.0	13200	704	1.00			
39	530	35.70	1.15			2.3	11400	610	1.15			
47	450	30.28	1.35			2.5	10300	549	1.25			
52	405	27.34	1.45			2.9	8920	477	1.45			
59	360	24.05	1.65			3.3	7840	418	1.65			
62	340	22.71	1.75			3.0 3.4 3.8 4.4 4.9 5.6 6.3 7.1 8.1 9.1 10	8610	461	0.95	K107 KF107 KA107 KAF107	R77 R77 R77 R77	
73	290	19.34	2.0				7620	408	1.05			
80	260	17.57	2.1				6820	364	1.15			
93	225	15.22	2.4				5960	318	1.35			
106	197	13.25	2.6				5370	286	1.50			
118	178	11.92	2.3				4700	251	1.70			
125	168	11.26	2.5				4150	222	1.95			
54 65 72 84 89 103 116 120 133 155	385	25.91	1.05	K 47 KF 47 KA 47 KAF 47	4P		3670	196	2.2			
	325	21.81	1.25				3250	174	2.2			
	290	19.58	1.35				2880	154	2.5			
	250	16.86	1.50				2610	140	2.8			
	235	15.86	1.60		5.4 6.0 7.0	4840	258	0.90	K97 KF97 KA97 KAF97	R57 R57 R57 R57		
	205	13.65	1.75			4360	232	1.00				
	182	12.19	1.95			3740	199	1.15				
	175	11.77	1.60		5.0 5.9 6.4 7.2 7.9	5710	143.47	1.40	K 107 KF 107 KA 107 KAF 107	8P		
108 134 158 177 207 221 263	195	13.08	0.85	K 37 KF 37 KA 37 KAF 37		4P		4830			121.46	1.65
	156	10.49	1.00					4470			112.41	1.80
	133	8.91	1.20					4010			100.75	2.0
	119	7.96	1.30					3620			90.96	2.2
	101	6.80	1.50		6.6 7.7 8.4 9.3	4370	143.47	1.85	K 107 KF 107 KA 107 KAF 107	6P		
	95	6.37	1.55			3700	121.46	2.2				
	80	5.36	1.75			3430	112.41	2.3				
3.0KW							3070	100.75			2.6	
0.50	51300	2818	0.95	K187 KA187	R97 R97	9.8 12	2940	143.47	2.7	K 107 KF 107 KA 107 KAF 107	4P	
0.46	57100	3062	0.90				2490	121.46	3.2			
0.56	46800	2519	1.05			7.6 8.9 9.7 11	3780	123.93	1.15	K 97 KF 97 KA 97 KAF 97	6P	
0.62	42100	2268	1.20				3200	105.13	1.35			
0.68	38000	2054	1.30				2950	96.80	1.45			
0.77	33600	1821	1.50				2640	86.52	1.65			
0.87	29700	1605	1.70			7.9 9.1 10 11 13 14 16 18 20 22 25	3600	176.05	1.20	K 97 KF 97 KA 97 KAF 97	4P	
1.0	25600	1395	1.95				3140	153.21	1.35			
1.2	22100	1196	2.3				2870	140.28	1.50			
0.82 0.99 1.1 1.3 1.5 1.7 1.9	31700	1704	1.00	K167 KA167	R97 R97		2540	123.93	1.70			
	26200	1408	1.20				2150	105.13	2.0			
	24100	1296	1.35				1980	96.80	2.2			
	20300	1101	1.55				1770	86.52	2.4			
	17500	944	1.85				1590	77.89	2.7			
	15500	843	2.1				1440	70.54	3.0			
1.1 1.3 1.5 1.6 1.9 2.5 2.8	14000	757	2.3				1280	62.55	3.4			
	22800	1229	0.80	K157 KF157 KA157 KAF157	R97 R97 R97 R97		1160	56.55	3.7			
	20300	1093	0.90		9.5 11 12 14 16 18 20 22 25 28 32 38	3010	147.33	0.90	K 87 KF 87 KA 87 KAF 87	4P		
	17500	942	1.05			2600	126.91	1.05				
	15800	854	1.15			2370	115.82	1.15				
	13900	756	1.30			2100	102.71	1.30				
	10500	567	1.70			1770	86.34	1.55				
	9310	504	1.95			1620	79.34	1.65				
2.6 3.0 3.3 3.8 4.2 4.9	9940	536	1.30	K127 KF127 KA127 KAF127		R87 R87 R87 R87		1440			70.46	1.85
	8750	473	1.50					1290			63.00	2.1
	7760	418	1.70					1160			56.64	2.3
	6840	367	1.90					1010			49.16	2.7
	6140	330	2.1					900			44.02	2.9
	5300	287	2.5					745			36.52	3.3

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
3.0KW						4.0KW							
16	1820	88.97	0.85	K 77 KF 77 KA 77 KAF 77	4P	1.0	34000	1395	1.45	K187 KA187	R97 R97 4P		
18	1600	78.07	0.95			1.2	29200	1196	1.70				
19	1510	73.99	1.00			1.4	25600	1046	1.95				
22	1330	64.76	1.15			1.5	23100	945	2.2				
24	1190	58.34	1.30			K 67 KF 67 KA 67 KAF 67	4P	1.0	34600	1408	0.90	K167 KA167	R97 R97 4P
27	1050	51.18	1.50					1.1	31900	1296	1.00		
31	920	45.16	1.70					1.3	26900	1101	1.20		
35	820	40.04	1.90					1.5	23100	944	1.40		
40	720	35.19	2.2					1.7	20500	843	1.55		
45	630	30.88	2.5	1.9	18500			757	1.75				
				2.2	15400			632	2.1				
32	910	44.32	0.90	K 57 KF 57 KA 57 KAF 57	4P			1.7	20900	854	0.85	K157 KF157 KA157 KAF157	R97 R97 4P
36	785	38.39	1.00					1.9	18400	756	1.00		
39	730	35.61	1.15			2.5	13800	567	1.30				
46	620	30.21	1.35			2.8	12300	504	1.45				
51	560	27.27	1.45			3.3	10600	434	1.70				
58	490	23.99	1.65			K127 KF127 KA127 KAF127	4P	2.7	13100	536	1.00		
62	465	22.66	1.70					3.0	11600	473	1.10		
73	395	19.29	1.95					3.4	10300	418	1.25		
80	360	17.53	2.1					3.9	9040	367	1.45		
92	310	15.19	2.2					4.3	8120	330	1.60		
106	270	13.22	2.5					5.0	7010	287	1.85		
112	255	12.48	2.1					5.6	6200	253	2.1		
132	220	10.63	2.3					K127 KF127 KA127 KAF127	4P	2.3	15100	610	0.85
145	198	9.66	2.4							2.6	13600	549	0.95
				3.0	11800					477	1.10		
46	620	30.28	0.95	3.4	10300	418	1.25						
51	560	27.34	1.05	K107 KF107 KA107 KAF107	4P	3.9	8990			364	0.90		
58	490	24.05	1.20			4.5	7860			318	1.00		
62	465	22.71	1.30			5.0	7080			286	1.15		
72	395	19.34	1.45			5.7	6200			251	1.30		
80	360	17.57	1.55			6.4	5470			222	1.45		
92	310	15.22	1.70			7.2	4840	196	1.65				
106	270	13.25	1.90			8.2	4290	174	1.70				
117	245	11.92	1.70			9.2	3800	154	1.90				
124	230	11.26	1.80			10	3440	140	2.1				
146	196	9.59	2.1			K97 KF97 KA97 KAF97	4P	2.3	15100	610	0.85		
161	178	8.71	2.2					2.6	13600	549	0.95		
186	154	7.55	2.4					3.0	11800	477	1.10		
213	134	6.57	2.6					3.4	10300	418	1.25		
72	400	19.58	1.00					K 47 KF 47 KA 47 KAF 47	4P	3.9	8990	364	0.90
83	345	16.86	1.10	4.5	7860					318	1.00		
88	325	15.86	1.15	5.0	7080					286	1.15		
103	280	13.65	1.30	5.7	6200					251	1.30		
115	250	12.19	1.40	6.4	5470					222	1.45		
119	240	11.77	1.15	7.2	4840					196	1.65		
133	215	10.56	1.30	8.2	4290	174	1.70						
154	186	9.10	1.50	9.2	3800	154	1.90						
164	175	8.56	1.55	10	3440	140	2.1						
190	151	7.36	1.65	K 127 KF 127 KA 127 KAF 127	8P	6.6	5810			146.30	2.2		
213	135	6.58	1.80			7.1	5420			136.35	2.4		
241	119	5.81	1.95			7.8	4870			122.67	2.7		
						8.7	4380			110.35	3.0		
157	182	8.91	0.90			K 107 KF 107 KA 107 KAF 107	8P			6.4	5960	112.41	1.35
176	163	7.96	0.95					7.2	5340	100.75	1.50		
206	139	6.80	1.10					7.9	4830	90.96	1.65		
220	130	6.37	1.10					8.7	4380	82.61	1.85		
261	110	5.36	1.30										
4.0KW													
1.7	20300	835	2.5	K187	R107 4P								
2.7	12600	520	4.0	KA187	R107 4P								
0.56	61900	2519	0.80	K187 KA187	R97 4P								
0.63	55600	2268	0.90										
0.69	50300	2054	1.00										
0.78	44500	1821	1.10										
0.88	39300	1605	1.25										
						6.7	5710	143.47	1.40	K 107 KF 107 KA 107 KAF 107	6P		
						7.9	4830	121.46	1.65				
						8.5	4470	100.75	1.80				
						9.5	4010	112.41	2.0				
						11	3620	90.96	2.2				

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
4.0KW						5.5KW					
9.9	3860	143.47	2.1			0.79	61100	1821	0.80		
12	3270	121.46	2.5			0.89	53900	1605	0.95		
13	3020	112.41	2.7			1.0	46700	1395	1.05	K187	R97
14	2710	100.75	3.0	K 107		1.2	40100	1196	1.25	KA187	R97
16	2450	90.96	3.3	KF 107	4P	1.4	35100	1046	1.45		
17	2220	82.61	3.6	KA 107		1.5	31700	945	1.60		
19	1970	73.30	4.1	KAF 107		1.9	24800	738	2.0		
						2.3	20800	621	2.4		
9.3	4120	153.21	1.05			1.3	36900	1101	0.85		
10	3770	140.28	1.15			1.5	31700	944	1.00		
11	3330	123.93	1.30	K 97		1.7	28200	843	1.15		
14	2830	105.13	1.50	KF 97	4P	1.9	25400	757	1.25	K167	R97
15	2600	96.80	1.65	KA 97		2.3	21200	632	1.50	KA167	R97
16	2330	86.52	1.85	KAF 97		2.5	18700	561	1.70		
18	2100	77.89	2.0			3.0	16100	481	2.0		
20	1900	70.54	2.3			3.4	14100	423	2.3		
12	3120	115.82	0.85			2.2	22100	661	0.80		
14	2760	102.71	1.00			2.5	19000	567	0.95	K157	R97
16	2320	86.34	1.15			2.8	16900	504	1.05	KF157	R97
18	2130	79.34	1.25	K 87	4P	3.3	14500	434	1.25	KA157	R97
20	1900	70.46	1.40	KF 87		3.8	12700	379	1.40	KAF15	R97
23	1690	63.00	1.60	KA 87		4.3	11100	333	1.60		
25	1520	56.64	1.75	KAF 87							
29	1320	49.16	2.0			3.4	14100	418	0.90		
32	1180	44.02	2.2			3.9	12400	367	1.05		
39	980	36.52	2.5			4.3	11100	330	1.15		
						5.0	9620	287	1.35	K127	R77
22	1740	64.76	0.90			5.6	8510	253	1.55	KF127	R77
24	1570	58.34	1.00			6.7	7150	213	1.80	KA127	R77
28	1380	51.18	1.15			7.1	6740	200	1.80	KAF127	R77
31	1210	45.16	1.30			8.6	5580	166	2.2		
35	1080	40.04	1.45	K 77	4P	9.8	4920	147	2.4		
37	1030	38.39	1.45	KF 77							
40	950	35.19	1.65	KA 77		6.4	7490	222	1.05	K107	R77
46	830	30.88	1.85	KAF 77		7.3	6640	196	1.20	KF107	R77
49	785	29.26	1.95			8.2	5870	174	1.25	KA107	R77
55	690	25.61	2.2			9.3	5200	154	1.40	KAF107	R77
62	620	23.08	2.5			10	4720	140	1.55		
70	545	20.24	2.8								
47	810	30.21	1.00			4.7	11100	150.41	1.60	K 157	
52	735	27.27	1.10			5.8	9050	122.39	2.0	KF 157	
59	645	23.99	1.25			7.1	7410	100.22	2.4	KA 157	8P
63	610	22.66	1.30			7.8	6780	91.65	2.7	KAF 157	
74	520	19.29	1.45	K 67	4P						
81	470	17.53	1.55	KF 67		5.2	10100	136.35	1.30	K 127	
94	410	15.19	1.70	KA 67		5.8	9060	122.67	1.45	KF 127	8P
107	355	13.22	1.90	KAF 67		6.4	8150	110.35	1.60	KA 127	
114	335	12.48	1.60			7.9	6650	90.03	1.95	KAF 127	
134	285	10.63	1.75								
147	260	9.66	1.85			7.1	7450	136.35	1.75	K 127	
170	225	8.37	1.95			7.8	6700	122.67	1.95	KF 127	6P
195	196	7.28	2.1			8.7	6030	110.35	2.2	KA 127	
						11	4920	90.03	2.6	KAF 127	
59	645	24.05	0.95			8.5	6150	112.41	1.30	K 107	6P
63	610	22.71	1.00			9.5	5510	100.75	1.45	KF 107	
73	520	19.34	1.10			11	4980	90.96	1.60	KA 107	
81	475	17.57	1.15	K 57	4P	12	4520	82.61	1.75	KAF 107	
93	410	15.22	1.30	KF 57							
107	355	13.25	1.45	KA 57		10	5270	143.47	1.50		
119	320	11.92	1.30	KAF 57		12	4460	121.46	1.80	K 107	4P
126	305	11.26	1.35			13	4130	112.41	1.95	KF 107	
148	260	9.59	1.55			14	3700	100.75	2.2	KA 107	
163	235	8.71	1.65			16	3340	90.96	2.4	KAF 107	
188	205	7.55	1.80			17	3030	82.61	2.6		
216	177	6.57	1.95								

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	
5.5KW						7.5KW						
12	4550	123.93	0.95	K 97 KF 97 KA 97 KAF 97	4P	1.7	38700	843	0.85	K167 KA167	R97 R97	4P
14	3860	105.13	1.10			1.9	34700	757	0.90			
15	3560	93.80	1.20			2.3	29000	632	1.10			
17	3180	86.52	1.35			2.5	25700	561	1.25			
18	2860	77.89	1.50			3.0	22100	481	1.45			
20	2590	70.54	1.65			3.4	19400	423	1.65			
23	2300	62.55	1.85			3.9	16900	369	1.90			
25	2080	56.55	2.1									
30	1760	47.93	2.4									
17	3170	86.34	0.85	K 87 KF 87 KA 87 KAF 87	4P	3.3	19900	434	0.90	K157 KF157 KA157 KAF157	R97 R97 R97 R97	4P
18	2910	79.34	0.95			3.8	17400	379	1.05			
20	2590	70.46	1.05			4.3	15300	333	1.20			
23	2310	63.00	1.15			4.9	13300	291	1.35			
25	2080	56.64	1.30			4.3	15200	330	0.85			
29	1810	49.16	1.50			5.0	13200	287	1.00			
32	1620	44.02	1.60			5.6	11600	253	1.10			
39	1340	36.52	1.85			6.7	9790	213	1.35			
46	1150	31.38	2.3			7.1	9220	200	1.30			
51	1020	27.87	2.5	8.6	7640	166	1.55					
				9.8	6740	147	1.80					
32	1660	45.16	0.95	K 77 KF 77 KA 77 KAF 77	4P	4.4	16400	164.50	1.95	K 167 KF 167 KA 167 KAF 167	8P	
36	1470	40.04	1.05			5.3	13400	134.99	2.4			
46	1130	30.88	1.35									
49	1070	29.26	1.45									
56	940	25.61	1.65									
62	850	23.08	1.85									
71	745	20.24	2.0									
80	655	17.86	2.2									
90	580	15.84	2.4									
106	495	13.52	2.7									
116	455	12.33	2.2									
132	400	10.81	2.5									
60	880	23.99	0.90	K 67 KF 67 KA 67 KAF 67	4P	6.4	11200	150.41	1.60	K 157 KF 157 KA 157 KAF 157	6P	
63	830	22.66	0.95			7.8	9130	122.39	1.95			
74	710	19.29	1.05			9.6	7480	100.22	2.4			
82	645	17.53	1.15			10	6840	91.65	2.6			
94	560	15.19	1.25			12	5950	79.65	3.0			
108	485	13.22	1.40									
115	460	12.48	1.15			7.1	10200	136.35	1.30			
135	390	10.63	1.30			7.8	9140	122.67	1.40			
148	355	9.66	1.35			8.7	8220	110.35	1.60			
171	305	8.37	1.45	11	6710	90.03	1.95					
196	265	7.28	1.55									
81	645	17.57	0.85	K 57 KF 57 KA 57 KAF 57	4P	9.8	7320	146.30	1.80	K 127 KF 127 KA 127 KAF 127	4P	
94	560	15.22	0.95			11	6820	136.35	1.90			
108	485	13.25	1.05			12	6130	122.67	2.1			
120	440	11.92	0.95			13	5520	110.35	2.4			
127	415	11.26	1.00			16	4500	90.03	2.9			
149	35	9.59	1.15			17	4110	82.11	3.2			
164	320	8.71	1.20			20	3550	71.06	3.7			
190	275	7.55	1.30									
218	240	6.57	1.45									
7.5KW						10	7190	143.47	1.10	K 107 KF 107 KA 107 KAF 107	4P	
1.7	38200	835	1.30	K187 KA187	R107 R107	12	6080	121.46	1.30			
2.0	33300	729	1.50			13	5630	112.41	1.40			
2.3	28400	622	1.75			14	5050	100.75	1.60			
						16	4560	90.96	1.75			
						17	4140	82.61	1.95			
						20	3670	73.30	2.2			
						22	3330	66.52	2.4			
						25	2860	57.17	2.8			
						29	2500	49.90	3.1			
				34	2120	42.33	3.5					
				39	1850	37.00	3.9					
1.2	55000	1196	0.90	K187 KA187	R97 R97	15	4850	96.80	0.90	K 97 KF 97 KA 97 KAF 97	4P	
1.4	48000	1046	1.05			17	4330	86.52	1.00			
1.5	43400	945	1.15			18	3900	77.89	1.10			
1.9	33900	738	1.45			20	3530	70.54	1.20			
2.3	28500	621	1.75			23	3130	62.55	1.35			
2.7	24100	527	2.1									

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
7.5KW						11KW					
25	2830	56.55	1.50	K 97	4P	5.3	19700	134.99	1.60	K 167	8P
30	2400	47.93	1.80	KF 97		6.6	16000	109.83	2.0	KA 167	
34	2100	41.87	2.0	KA 97		5.8	18000	164.50	1.80	K 167	6P
37	1920	38.29	2.2	KAF 97		7.1	14800	134.99	2.2	KA 167	
42	1710	34.22	2.5								
23	3160	63.00	0.85	K 87 KF 87 KA 87 KAF 87	4P	8.8	12000	164.50	2.7	K 167	4P
25	2840	56.64	0.95			11	9850	134.99	3.2	KA 167	
29	2460	49.16	1.10			5.9	17900	122.39	1.00	K 157	8P
32	2200	44.02	1.20			7.2	14600	100.22	1.25	KF 157	
39	1830	36.52	1.35			7.9	13400	91.65	1.35	KA 157	
46	1570	31.38	1.70			9.0	11600	79.75	1.55	KAF 157	
51	1400	27.87	1.85			6.4	16500	150.41	1.10	K 157	6P
57	1250	24.92	2.0			7.8	13400	122.39	1.35	KF 157	
64	1120	22.40	2.0			9.6	11000	100.22	1.65	KA 157	
74	970	19.45	2.4			10	10000	91.65	1.80	KAF 157	
82	870	17.41	2.5			12	8730	79.75	2.1		
89	800	16.00	2.2								
99	725	14.44	2.9								
46	1550	30.88	1.00	K 77 KF 77 KA 77 KAF 77	4P	9.6	11000	150.41	1.65	K 157	4P
49	1470	29.26	1.05			12	8930	122.39	2.0	KF 157	
56	1280	25.61	1.20			14	7310	100.22	2.5	KA 157	
62	1160	23.08	1.35			16	6690	91.65	2.7	KAF 157	
71	1010	20.24	1.50			11	9930	136.35	1.30	K 127 KF 127 KA 127 KAF 127	4P
80	890	17.86	1.60			12	8930	122.67	1.45		
90	795	15.84	1.75			13	8040	110.35	1.60		
106	675	13.52	2.0			16	6560	90.03	2.0		
116	620	12.33	1.60			18	5980	82.11	2.2		
132	545	10.81	1.80			20	5180	71.06	2.5		
150	480	9.54	1.95			13	8200	112.41	1.00	K 107 KF 107 KA 107 KAF 107	4P
169	425	8.46	2.13			14	7350	100.75	1.10		
198	365	7.22	2.3			16	6630	90.96	1.20		
						17	6030	82.61	1.35		
						20	5350	73.30	1.50		
1.7	55900	835	0.90	K187 R107 KA187 R107	4P	22	4850	66.52	1.65	K 97 KF 97 KA 97 KAF 97	4P
2.0	48800	729	1.05			25	4170	57.17	1.90		
2.3	41600	622	1.20			29	3640	49.90	2.2		
2.8	34800	520	1.45			34	3090	42.33	2.4		
3.2	30400	454	1.65			39	2700	37.00	2.7		
4.1	23800	355	2.1								
2.0	49600	738	1.00	K187 R97 KA187 R97	4P	20	5150	70.54	0.85	K 87 KF 87 KA 87 KAF 87	4P
2.3	41700	621	1.20			23	4560	62.55	0.95		
2.7	35300	527	1.40			25	4130	56.55	1.05		
4.5	21300	318	1.50			30	3500	47.93	1.25		
5.2	18600	278	1.70			34	3050	41.87	1.40		
5.9	16300	244	1.95	K167 R107 KA167 R107	4P	38	2790	38.29	1.55		
6.8	14200	213	2.2			42	2500	34.22	1.70		
7.0	13700	206	2.3			47	2250	30.81	1.90		
						52	2040	27.90	2.1		
						58	1800	24.74	2.4		
2.6	37500	561	0.85	K167 R97 KA167 R97	4P	64	1630	22.37	2.6		
3.0	32300	481	1.00			33	3210	44.02	0.80	K 87 KF 87 KA 87 KAF 87	4P
3.4	28300	423	1.15			39	2660	36.52	0.95		
3.9	24700	369	1.30			46	2290	31.38	1.20		
						52	2030	27.87	1.30		
4.3	22300	333	0.80	K157 R97 KF157 R97 KA157 R97 KAF157 R97	4P	58	1820	24.92	1.40		
4.9	19500	291	0.90			64	1630	22.40	1.40		
						74	1420	19.45	1.60		
						83	1270	17.41	1.75		
						90	1170	16.00	1.55		
6.8	14300	213	0.90	K127 R87 KF127 R87 KA127 R87 KAF127 R87	4P	100	1050	14.44	2.0		
7.2	13500	200	0.90			115	920	12.56	2.2		
8.7	11200	166	1.10			129	810	11.16	1.85		
9.8	9850	147	1.20			144	730	10.00	2.1		
						174	605	8.29	2.3		
						200	525	7.21	2.5		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
11.0KW						15.0KW							
62	1680	23.08	0.90	K 77 KF 77 KA 77 KAF 77	4P	26	5610	57.17	1.45	K 107 KF 107 KA 107 KAF 107	4P		
71	1480	20.24	1.00			29	4900	49.90	1.60				
81	1300	17.86	1.10			34	4150	42.33	1.75				
91	1160	15.84	1.20			39	3630	37.00	2.0				
107	990	13.52	1.35			45	3210	32.68	2.2				
117	900	12.33	1.10			47	3070	31.28	2.2	K 97 KF 97 KA 97 KAF 97	4P		
133	790	10.81	1.25			50	2840	29.00	2.5				
151	700	9.54	1.35			30	4700	47.93	0.90				
170	620	8.46	1.45			35	4110	41.87	1.05				
199	530	7.22	1.55			38	3760	38.29	1.15	KA 97 KAF 97			
15KW						43	3360	34.22	1.30			K 87 KF 87 KA 87 KAF 87	4P
2.3	56100	622	0.90	K187 KA187	R107 4P	47	3020	30.81	1.40				
2.8	47000	520	1.05			52	2740	27.90	1.55				
3.2	41000	454	1.20			59	2430	24.74	1.75				
4.1	32100	355	1.55			65	2190	22.37	1.95				
5.6	23600	261	2.1			77	1860	18.96	2.3				
						88	1620	16.56	2.7	K 87 KF 87 KA 87 KAF 87	4P		
4.6	28700	318	1.10	K167 KA167	R107 4P	47	3080	31.38	0.90				
5.3	25000	278	1.30			52	2730	27.87	0.95				
6.0	22000	244	1.45			59	2440	24.92	1.00				
6.8	19200	213	1.65			65	2200	22.40	1.05				
7.1	18500	206	1.75			75	1910	19.45	1.20				
8.1	16200	180	1.95			84	1710	17.41	1.30				
9.1	14400	160	2.2			91	1570	16.00	1.15				
6.3	20700	230	0.85	K157 KF157 KA157 KAF157	R107 4P	101	1420	14.44	1.50				
6.9	19200	213	0.95			116	1230	12.56	1.60				
7.8	16800	187	1.05			131	1100	11.16	1.35				
9.3	14200	157	1.25			146	980	10.00	1.55				
12	11000	122	1.65			176	810	8.29	1.70				
14	9630	107	1.85			202	705	7.21	1.85				
						18.5KW							
5.4	26600	179.86	1.90	K 187 KA 187	4P	2.8	57800	520	0.85	K187 KA187	R107 4P		
5.9	24400	165.21	2.0			3.2	50400	454	1.00				
7.2	19900	134.99	1.60	K 167 KA 167	6P	4.1	39500	355	1.25				
8.8	16200	109.83	1.95			5.6	29000	261	1.70				
8.9	16100	164.50	2.0	K 167 KA 167	4P	6.6	24600	221	2.0				
11	13200	134.99	2.4			4.6	35300	318	0.90				
7.9	18100	122.39	1.00	K157 KF157 KA157 KAF157	R97 6P	5.3	30800	278	1.05	K167 KA167	R107 4P		
9.7	14800	100.22	1.20			6.0	27100	244	1.20				
11	13500	91.65	1.35			6.9	23600	213	1.35				
12	11800	79.75	1.55			7.1	22800	206	1.40				
14	10400	70.38	1.75			8.1	20000	180	1.60				
						9.2	17700	160	1.80				
9.7	14800	150.41	1.20			K 157 KF 157 KA 157 KAF 157	6P	11	15000			135	2.1
12	12000	122.39	1.50	12	13100			118	2.4				
15	9830	100.22	1.85	7.8	20700			187	0.85			K157 KF157 KA157 KAF157	R107 4P
16	8990	91.65	2.0	9.3	17400			157	1.05				
18	7820	79.75	2.3	12	13600			122	1.35				
						14	11900	107	1.50				
11	13400	136.14	0.95	K 157 KF 157 KA 157 KAF 157	4P	5.4	32800	179.86	1.55	K 187 KA 187	6P		
12	12000	122.48	1.10			5.9	30100	165.21	1.65				
13	10800	110.18	1.20			6.7	26300	144.59	1.90				
16	8820	89.89	1.45			7.5	23600	129.69	2.1				
18	8040	81.98	1.60			8.1	21700	179.86	2.3	K 187 KA 187	4P		
21	6960	70.95	1.85			8.9	19900	165.21	2.5				
23	6140	62.60	2.1			10	17400	144.59	2.9				
27	5300	54.07	2.5			11	15600	129.69	3.2				
31	4690	47.82	2.8										
16	8920	90.03	0.90	K 127 KF 127 KA 127 KAF 127	4P	11	16300	134.99	1.95	K 167 KA 167	4P		
18	8110	82.11	1.00			13	13200	109.83	2.4				
20	7190	71.06	1.10			17	10600	87.86	3.0				
22	6530	62.70	1.25										



输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole				
18.5KW						22KW									
9.7	18300	100.22	1.00	K 157	6P	5.3	36700	278	0.85	K167 KA167	R97 R97 4P				
11	16700	91.65	1.10	KF 157		6.0	32200	244	1.00						
12	14500	79.75	1.25	KA 157		6.9	28200	213	1.15						
14	12800	70.38	1.40	KAF 157		7.1	27200	206	1.20						
12	14800	122.39	1.20	K 157 KF 157 KA 157 KAF 157	4P	8.1	23800	180	1.35						
15	12100	100.22	1.50			9.2	21100	160	1.50						
16	11100	91.65	1.65			11	17900	135	1.80						
18	9620	79.75	1.85			12	15600	118	2.0						
21	8490	70.38	2.1			9.3	20800	157	0.85	K157 KF157	R97 R97 4P				
24	7360	61.02	2.5			12	16200	122	1.10	KA157	R97				
27	6550	54.29	2.8			14	14100	107	1.25	KAF157	R97				
31	5640	46.79	3.2												
39	4580	38.02	3.9												
13	13300	110.35	1.00	K 127 KF 127 KA 127 KAF 127	4P	5.4	39000	179.86	1.30	K 187 KA 187	6P				
16	10800	90.03	1.20			5.9	35800	165.21	1.40						
18	9890	82.11	1.30			6.7	31300	144.59	1.60						
21	8560	71.06	1.50			7.5	28100	129.69	1.80						
23	7550	62.70	1.70			8.6	24400	112.60	2.0						
27	6520	54.15	2.0			8.1	25800	179.86	1.95	K 187 KA 187	4P				
31	5770	47.90	2.2			8.9	23700	165.21	2.1						
36	4850	40.25	2.7			10	20700	144.59	2.4						
40	4370	36.30	3.0			11	18600	129.69	2.7						
47	3780	31.41	3.4												
53	3340	27.72	3.9					11	19400	134.99	1.65	K 167 KA 167	4P		
20	8840	73.30	0.90	13	15700	109.83	2.0								
22	8020	66.52	1.00	17	12600	87.86	2.5								
26	6890	57.17	1.15	K 107 KF 107 KA 107 KAF 107	4P	19	11200	78.14	2.9						
29	6020	49.90	1.30			9.7	21700	100.22	0.85	K 157 KF 157 KA 157 KAF 157	6P				
35	5100	42.33	1.45			11	19900	91.65	0.90						
40	4460	37.00	1.60			12	17300	79.75	1.05						
45	3940	32.68	1.85			14	15200	70.38	1.20						
47	3770	31.28	1.80			16	13200	61.02	1.35						
51	3500	29.00	2.1			12	17600	122.39	1.05	K 157 KF 157 KA 157 KAF 157	4P				
56	3170	26.32	2.3			15	14400	100.22	1.25						
65	2730	22.62	2.6			16	13100	91.65	1.35						
74	2380	19.74	3.0			18	11400	79.75	1.55			K 157 KF 157 KA 157 KAF 157	4P		
88	2020	16.75	3.5			21	10100	70.38	1.80						
35	5050	41.87	0.85			24	8750	61.02	2.1						
48	3720	30.81	1.15			27	7790	54.29	2.3						
53	3360	27.90	1.30	31	6710	46.79	2.7								
59	2980	24.74	1.45	K 97 KF 97 KA 97 KAF 97	4P	39	5450	38.02	3.3						
65	2700	22.37	1.60			16	12900	90.03	1.00	K 127 KF 127 KA 127 KAF 127	4P				
77	2290	18.96	1.90			18	11800	82.11	1.10						
88	2000	16.56	2.2			21	10200	71.06	1.30						
106	1670	13.85	2.6			23	8980	62.70	1.45						
122	1450	11.99	2.7			27	7750	54.15	1.70						
59	3000	24.92	0.85			31	6860	47.90	1.90						
65	2700	22.40	0.85			36	5760	40.25	2.3						
75	2340	19.45	1.00			40	5200	36.30	2.5						
84	2100	17.41	1.05	47	4500	31.41	2.9								
101	1740	14.45	1.20	53	3970	27.72	3.3								
117	1510	12.56	1.30	61	3430	23.94	3.8								
131	1350	11.16	1.10	69	3030	21.71	4.3								
147	1210	10.00	1.25												
177	1000	8.29	1.40			26	8200	57.17	1.00	K 107 KF 107 KA 107 KAF 107	4P				
203	870	7.21	1.50			29	7160	49.90	1.10						
22KW						35	6070	42.33	1.20						
3.2	60000	454	0.85	K187 KA187	R107 R107 4P	40	5310	37.00	1.35						
4.1	47000	355	1.05			45	4690	32.69	1.55						
5.6	34500	261	1.45			47	4490	31.28	1.50						
6.6	29300	221	1.70			51	4160	29.00	1.75						
7.6	25600	193	1.95			56	3770	26.32	1.90						
8.9	21600	163	2.3			65	3240	22.62	2.2						
						74	2830	19.74	2.5						

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
22KW						30KW					
88	2400	16.75	2.9	K 107	4P	41	7060	36.30	1.85	K 127	4P
100	2100	14.63	3.3	KF 107		47	6110	31.41	2.1	KF 127	
109	1930	13.43	2.2	KA 107		53	5390	27.72	2.4	KA 127	
125	1680	11.73	2.6	KAF 107		62	4660	23.94	2.8	KAF 127	
147	1430	9.94	2.9								
48	4420	30.82	0.95	K 97 KF 97 KA 97 KAF 97	4P	35	8250	42.33	0.90	K 107 KF 107 KA 107 KAF 107	4P
53	4000	27.91	1.05			40	7210	37.00	1.00		
59	3550	24.75	1.20			47	6100	31.28	1.10		
65	3210	22.37	1.35			51	5650	29.00	1.25		
77	2720	18.96	1.60			56	5130	26.32	1.40		
88	2370	16.56	1.80			65	4410	22.62	1.65		
106	1990	13.85	2.2			74	3850	19.74	1.85		
122	1720	11.99	2.3			88	3260	16.75	2.2		
141	1490	10.41	1.90			100	2850	14.63	2.4		
168	1250	8.71	2.1			109	2620	13.43	1.65		
						125	2280	11.73	1.90		
						148	1940	9.94	2.2		
						169	1690	8.69	2.4		
75	2790	19.45	0.80	K 87 KF 87 KA 87 KAF 87	4P	59	4820	24.75	0.90	K 97 KF 97 KA 97 KAF 97	4P
84	2500	17.41	0.90			66	4360	22.37	1.00		
101	2070	14.44	1.00			78	3690	18.96	1.15		
117	1800	12.56	1.10			89	3230	16.56	1.35		
131	1600	11.16	0.95			106	2700	13.85	1.60		
147	1430	10.00	1.05			123	2340	11.99	1.65		
177	1190	8.29	1.20			141	2030	10.41	1.40		
203	1030	7.21	1.25			169	1700	8.71	1.55		
30KW						37KW					
5.6	47000	261	1.05	K187 KA187	R107 R107 4P	5.6	58000	261	0.85	K187 KA187	R107 R107 4P
6.6	39800	221	1.25			6.6	49200	221	1.00		
7.6	34800	193	1.45			7.6	43000	193	1.15		
9.0	29400	163	1.70			9.0	36300	163	1.40		
6.9	38300	213	0.85	K167 KA167	R107 R107 4P	8.1	40000	180	0.80	K167 KA167	R107 R107 4P
7.1	37000	206	0.85			9.2	35500	160	0.90		
8.1	32400	180	1.00			11	30100	135	1.05		
9.2	28700	160	1.10			12	26300	118	1.20		
11	24400	135	1.30								
12	21300	118	1.50								
8.2	35100	179.86	1.45	K 187 KA 187	4P	8.2	43200	179.86	1.15	K 187 KA 187	4P
8.9	32200	165.21	1.55			8.9	39700	165.21	1.25		
10	28200	144.59	1.75			10	34800	144.59	1.45		
11	25300	129.69	2.0			11	31200	129.69	1.60		
13	21900	112.60	2.3			13	27100	112.60	1.85		
14	19900	102.16	2.5			14	24600	102.16	2.0		
17	17200	88.00	2.9			17	21200	88.00	2.4		
13	21400	109.83	1.50	K 167 KA 167	4P	13	26400	109.83	1.20	K 167 KA 167	4P
17	17100	87.86	1.85			17	21100	87.86	1.50		
19	15200	78.14	2.1			19	18800	78.14	1.70		
22	13300	68.07	2.4			22	16400	68.07	1.95		
24	11800	60.74	2.7			24	14600	60.74	2.2		
15	19500	100.22	0.90	K 157 KF 157 KA 157 KAF 157	4P	28	12400	51.77	2.6	K 157 KF 157 KA 157 KAF 157	4P
16	17900	91.65	1.00			16	22000	91.65	0.80		
18	15500	79.75	1.15			18	19200	79.75	0.95		
21	13700	70.38	1.30			21	16900	70.38	1.05		
24	11900	61.02	1.50			24	14700	61.02	1.25		
27	10600	54.29	1.70			27	13000	54.29	1.40		
31	9120	46.79	1.95			31	11200	46.79	1.60		
39	7410	38.02	2.4			39	9140	38.02	1.95		
47	6100	31.30	3.0			47	7520	31.30	2.4		
21	13800	71.06	0.95	K 127 KF 127 KA 127 KAF 127	4P	23	15000	62.70	0.85	K 127 KF 127 KA 127 KAF 127	4P
23	12200	62.70	1.05			27	13000	54.15	1.00		
27	10500	54.15	1.25			31	11500	47.90	1.15		
31	9320	47.90	1.40			37	9660	40.25	1.35		
37	7830	40.25	1.65								




输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
37KW						45KW					
41	8710	36.30	1.50	K 127 KF 127 KA 127 KAF 127	4P	102	4190	14.37	2.9	K 127	4P
47	7540	31.41	1.70			115	3740	12.78	2.3	KF 127	
53	6650	27.72	1.95			137	3140	10.74	2.5	KA 127	
62	5740	23.94	2.3			169	2540	8.68	2.8	KAF 127	
70	5080	21.17	2.6								
83	4270	17.79	3.0								
102	3450	14.37	3.5								
115	3070	12.78	2.8								
137	2580	10.74	3.1								
169	2090	8.68	3.5								
40	8890	37.00	0.80	K 107 KF 107 KA 107 KAF 107	4P	51	8480	29.00	0.85	K 107 KF 107 KA 107 KAF 107	4P
47	7520	31.28	0.90			56	7690	26.32	0.95		
51	6970	29.00	1.05			65	6610	22.62	1.10		
56	6320	26.32	1.15			74	5770	19.74	1.25		
65	5440	22.62	1.30			88	4890	16.75	1.45		
74	4740	19.74	1.50			100	4280	14.63	1.60		
88	4020	16.75	1.75			109	3930	13.43	1.10		
100	3520	14.63	1.95			125	3430	11.73	1.25		
109	3230	13.43	1.35			148	2910	9.94	1.45		
125	2820	11.73	1.55			169	2540	8.69	1.60		
148	2390	9.94	1.75								
169	2090	8.69	1.95								
45KW						55KW					
6.6	59800	221	0.85	K187 KA187	R107 4P	10	51500	144.59	0.95	K 187 KA 187	4P
7.6	52300	193	0.95			11	46200	129.69	1.10		
9.0	44200	163	1.15			13	40100	112.60	1.25		
				14	36400	102.16	1.35				
				17	31300	88.00	1.60				
				20	26300	73.96	1.90				
				23	22800	64.04	2.2				
						</					

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
75KW						110KW							
19	37800	78.14	0.85	K 167 KA 167	4P	17	62300	88.00	0.80	K 187 KA 187	4P		
22	32900	68.07	0.95			20	52300	73.96	0.95				
24	29400	60.74	1.10			23	45300	64.04	1.10				
29	25100	51.77	1.30			28	37700	53.36	1.30				
35	20800	42.89	1.55			33	32200	45.50	1.55				
40	17700	36.61	1.80			35	30100	42.51	1.65				
46	15600	32.25	2.0			39	27300	38.57	1.85				
51	13900	28.77	2.3			45	23500	33.23	2.1				
60	11900	24.52	2.7			53	19800	27.92	2.5				
39	18400	38.02	1.00	K 157 KF 157 KA 157 KAF 157	4P	29	36600	51.77	0.85	K 167 KA 167	4P		
47	15100	31.30	1.20			35	30300	42.89	1.05				
54	13400	27.62	1.35			41	25900	36.61	1.25				
62	11600	23.95	1.55			46	22800	32.25	1.40				
69	10300	21.31	1.75			52	20400	28.77	1.55				
81	8890	18.37	2.0			61	17300	24.52	1.85				
99	7220	14.92	2.5			73	14400	20.32	2.2				
117	6120	12.65	2.8	86	12300	17.34	2.6						
47	15200	31.41	0.85	K 127 KF 127 KA 127 KAF 127	4P	62	16900	23.95	1.05	K 157 KF 157 KA 157 KAF 157	4P		
53	13400	27.72	0.95			40	15100	21.31	1.20				
62	11600	23.94	1.10			81	13000	18.37	1.40				
70	10200	21.17	1.25			100	10600	14.92	1.70				
83	8600	17.79	1.50			117	8950	12.65	1.90				
103	6940	14.37	1.75			132KW							
116	6190	12.78	1.40			20	62800	73.96	0.80	K 187 KA 187	4P		
138	5200	10.74	1.55			23	54400	64.04	0.90				
171	4200	8.68	1.70	28	45300	53.36	1.10						
90KW						33	38600	45.50	1.30				
14	59300	102.16	0.85	K 187 KA 187	4P	35	36100	42.51	1.40				
17	51100	88.00	1.00			39	32700	38.57	1.55				
20	42900	73.96	1.15			45	28200	33.23	1.75				
23	37200	64.04	1.35			53	23700	27.92	2.1				
28	31000	53.36	1.60			61	20500	24.18	2.3				
33	26400	45.50	1.90			74	17100	20.15	2.6				
35	24700	42.51	2.0			86	14600	17.18	2.8				
38	22400	38.57	2.2			160KW							
22	39500	68.07	0.80	K 167 KA 167	4P	35	36400	42.89	0.90	K 167 KA 167	4P		
24	35300	60.74	0.90			41	31100	36.61	1.05				
29	30100	51.77	1.05			46	27400	32.25	1.15				
35	24900	42.89	1.30			52	24400	28.77	1.30				
40	21300	36.61	1.50			61	20800	24.52	1.55				
46	18700	32.25	1.70			73	17200	20.32	1.85				
51	16700	28.77	1.90			86	14700	17.34	2.2				
60	14200	24.52	2.2			160KW							
73	11800	20.32	2.7	K 157 KF 157 KA 157 KAF 157	4P	62	20300	23.95	0.90	K 187 KA 187	4P		
85	10100	17.34	3.2			70	18100	21.31	1.00				
90KW						81	15600	18.37	1.15				
39	22100	38.02	0.80			100	12700	14.92	1.40				
47	18200	31.30	1.00			117	10700	12.65	1.60				
54	16000	27.62	1.10			160KW							
62	13900	23.95	1.30			28	54900	53.36	0.90	K 187 KA 187	4P		
69	12400	21.31	1.45			33	46800	45.50	1.05				
81	10700	18.37	1.70			45	34200	33.23	1.45				
99	8670	14.92	2.1			53	28700	27.92	1.75				
117	7350	12.65	2.3			61	24900	24.18	1.90				
90KW						74	20700	20.15	2.1				
62	13900	23.94	0.95	K 127 KF 127 KA 127 KAF 127	4P	86	17700	17.18	2.3				
70	12300	21.17	1.05			160KW							
83	10300	17.79	1.25			41	37700	36.61	0.85	K 167 KA 167	4P		
103	8330	14.37	1.45			61	25200	24.52	1.25				
116	7420	12.78	1.15			73	20900	20.32	1.55				
138	6240	10.74	1.30			86	17800	17.34	1.80				
171	5040	8.68	1.45			160KW							





输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
160KW					
81	189	18.37	0.95	K 157	4P
100	15400	14.92	1.15	KF 157	
117	13000	12.65	1.30	KA 157	
				KAF 157	
200KW					
33	58500	45.50	0.85	K 187 KA 187	4P
45	42700	33.23	1.15		
53	35900	27.92	1.40		
61	31100	24.18	1.55		
74	25900	20.15	1.70		
86	22100	17.18	1.85		
61	31500	24.52	1.00	K 167	4P
73	26100	20.32	1.20	KA 167	
86	22300	17.34	1.45		
100	19200	14.92	0.95	K 157	4P
117	16300	12.65	1.05	KF 157	
				KA 157	
				KAF 157	

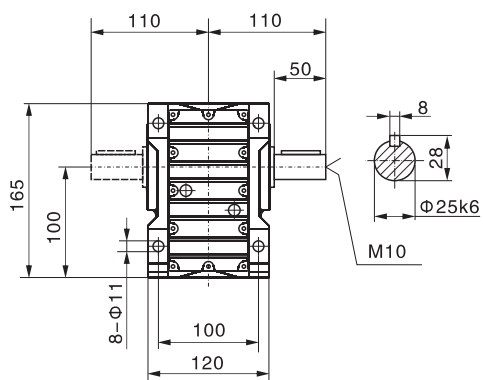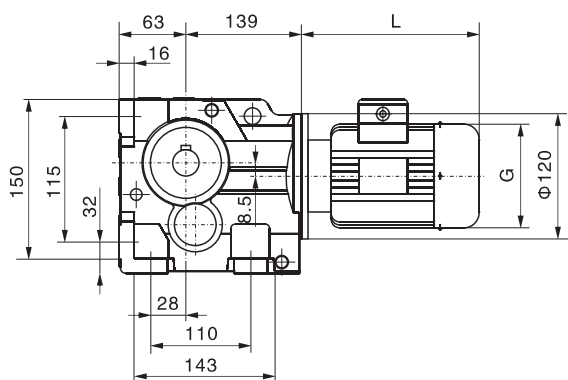





K37

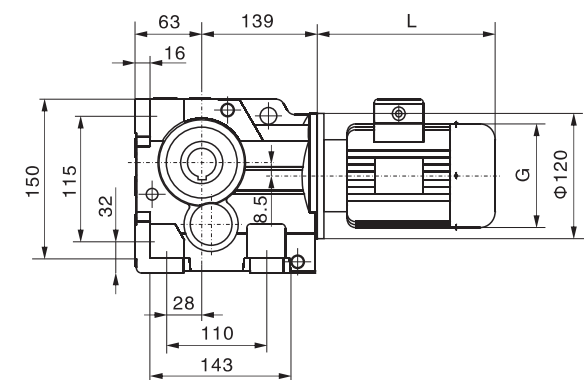


KAB37

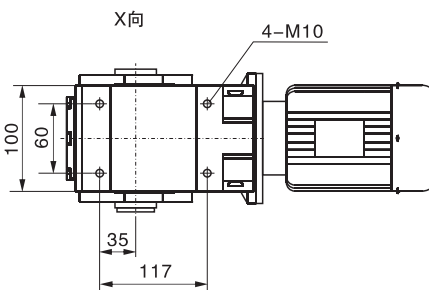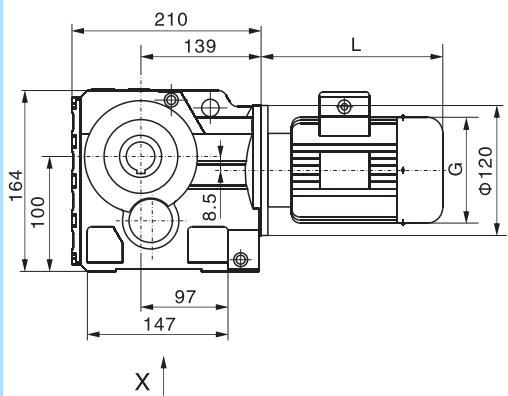



KA37

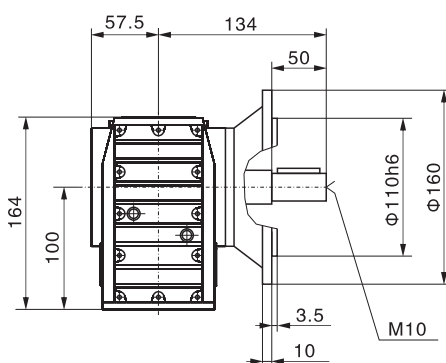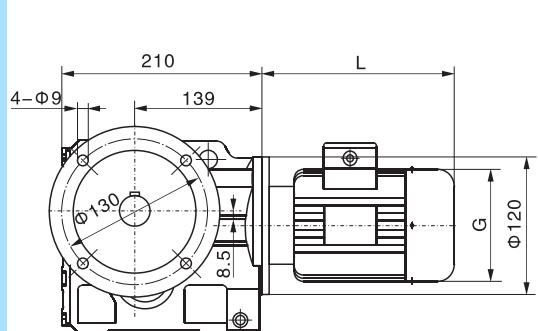



KF37





KAF37

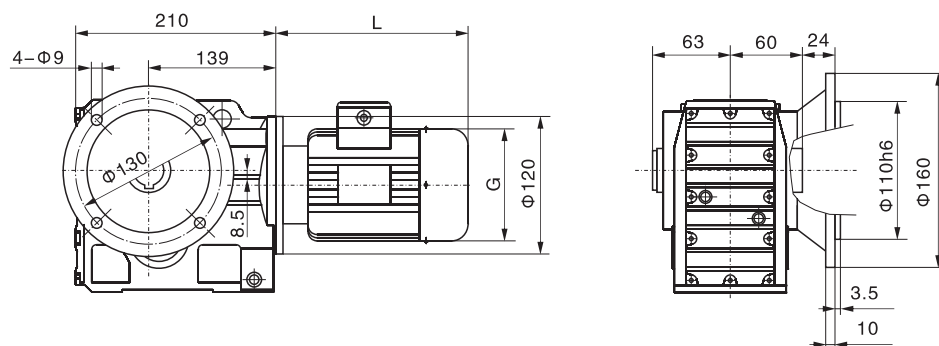



KAZ37

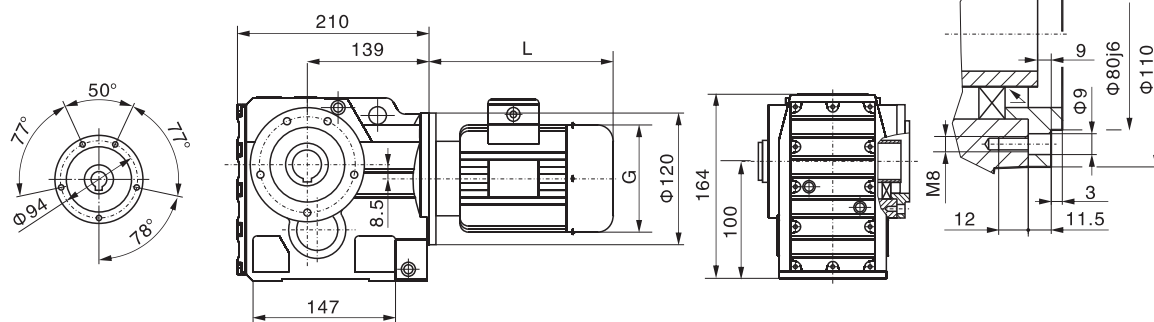





KAT37

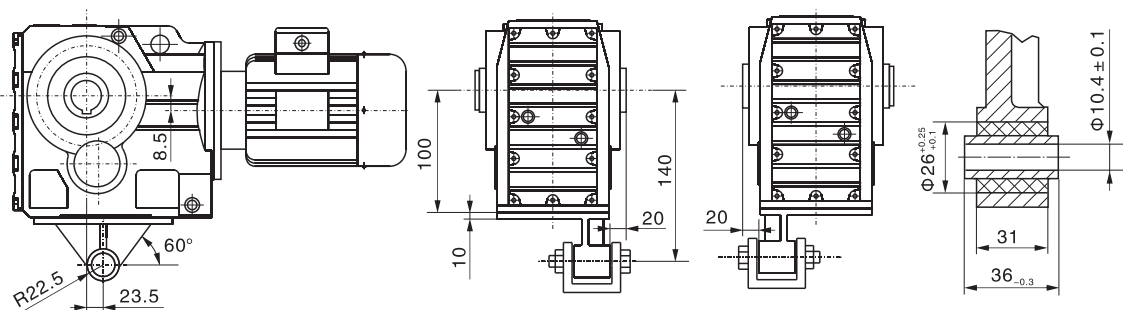

K..37 R17



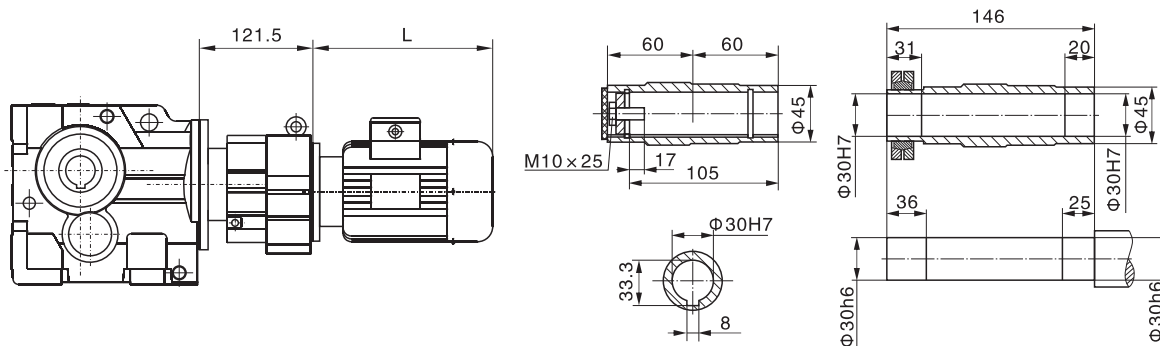



电机需方配或配特殊电机
时需加联接法兰


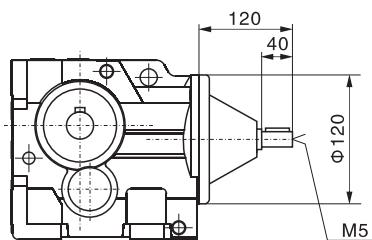



K..S37





K

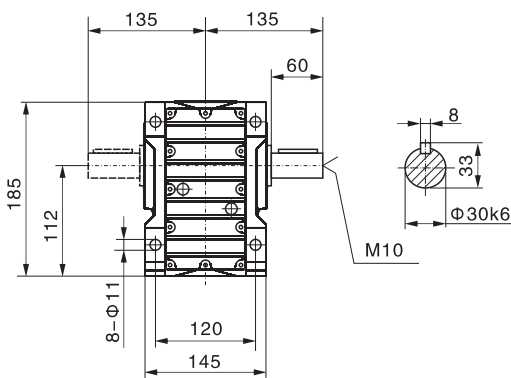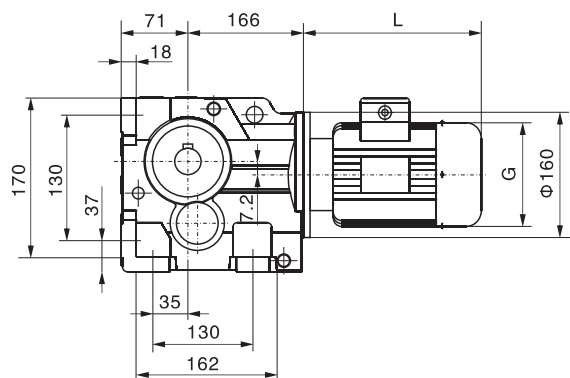

K47


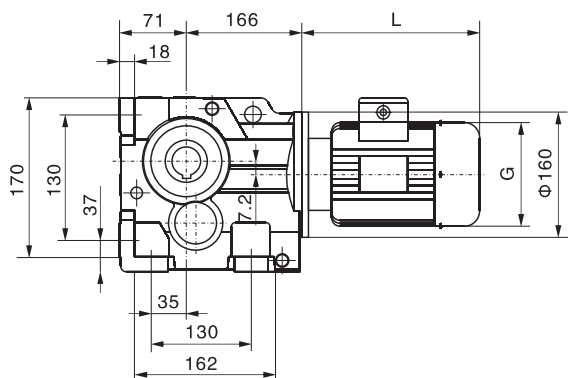


KAB47

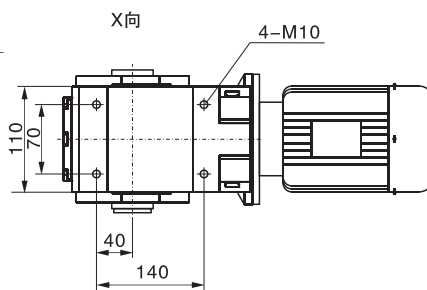
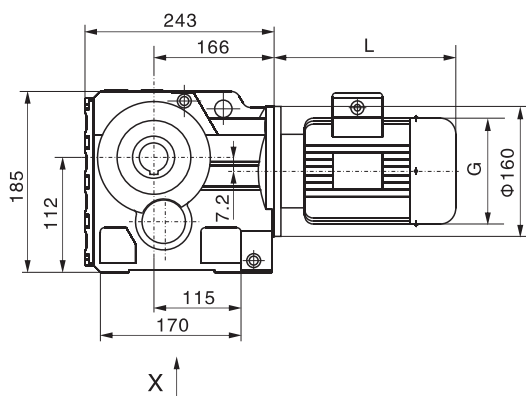


KA47



KF47

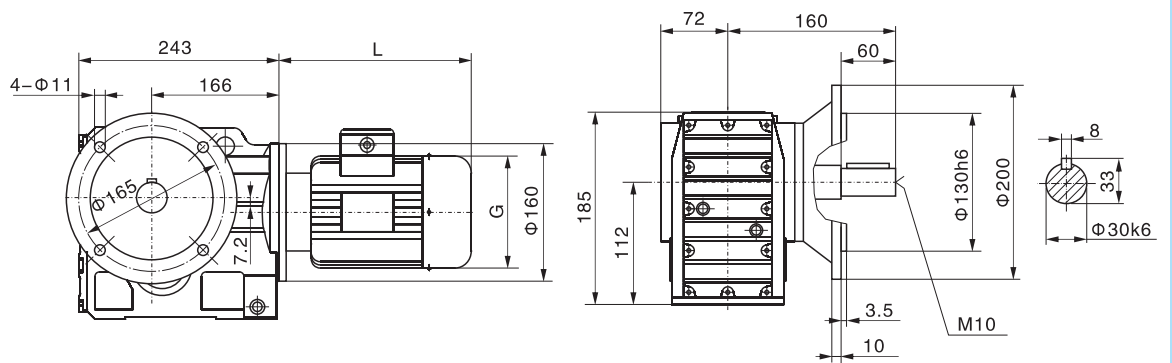



KAF47

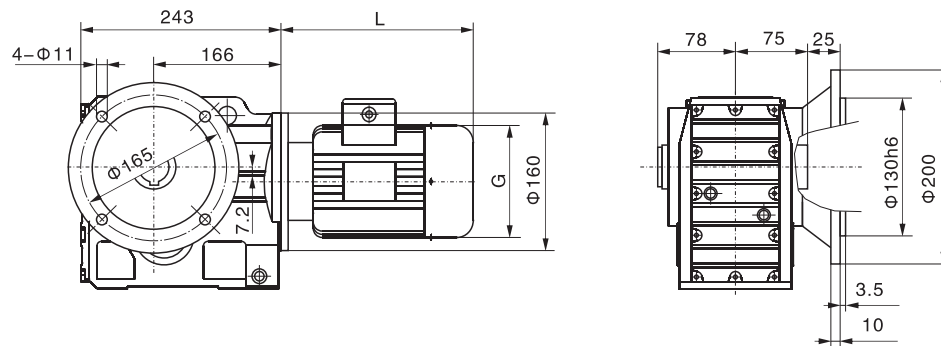



KAZ47

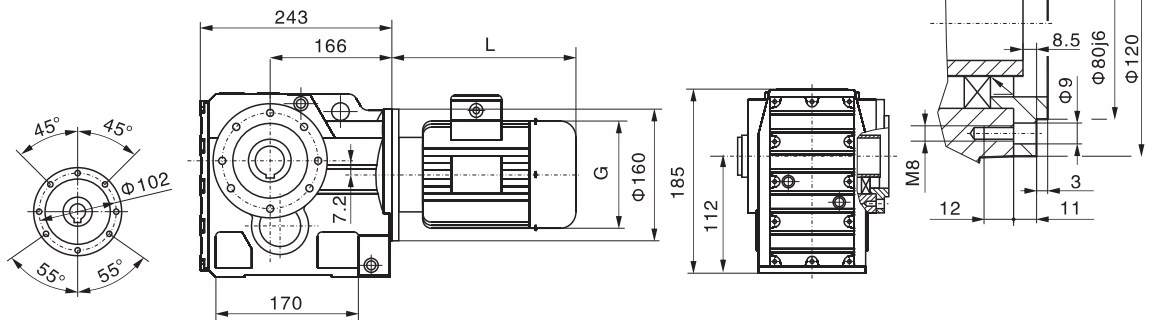

KAT47

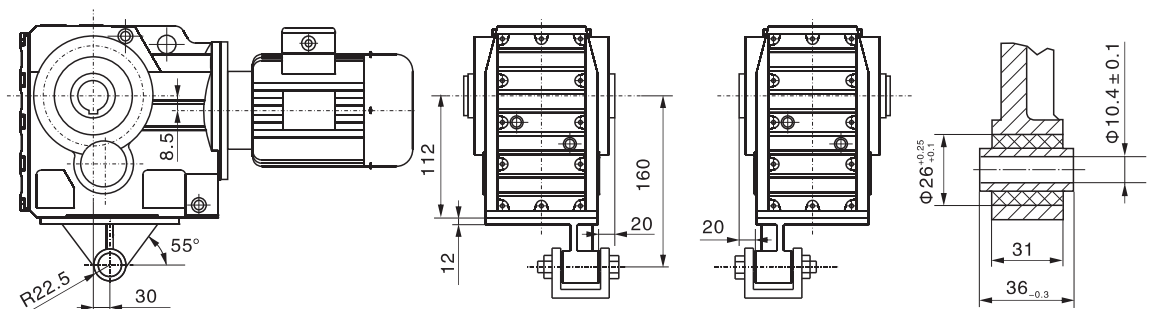



K..47 R17


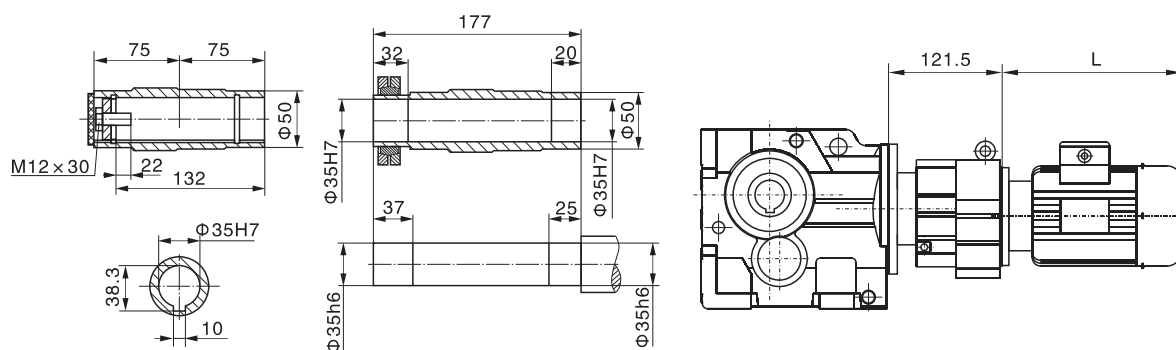


K..S47



电机需方配或配特殊电机
时需加联接法兰



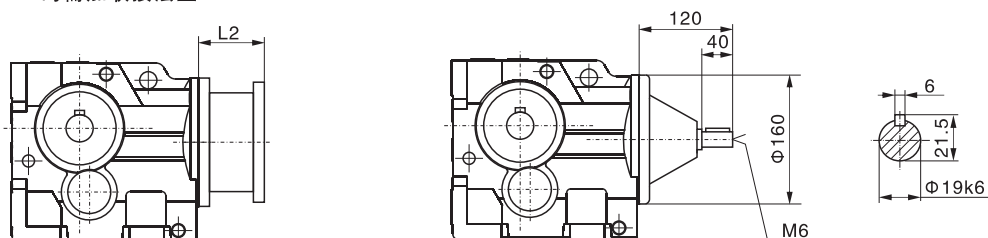






K57

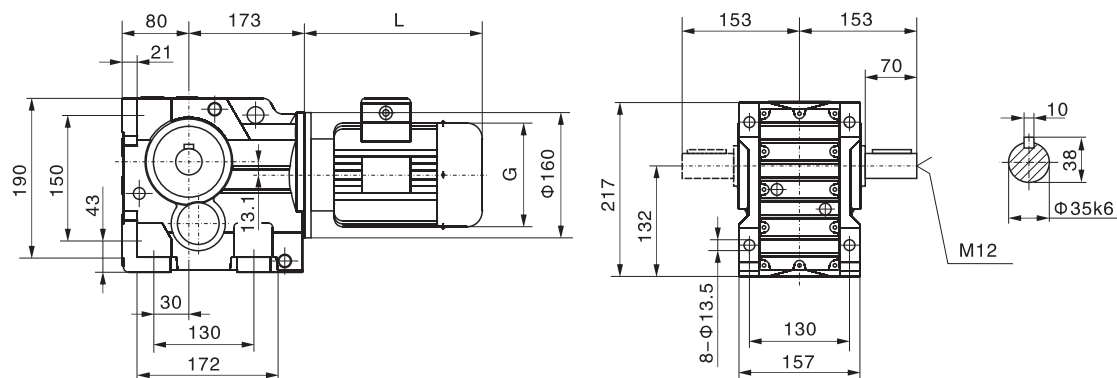







KAB57

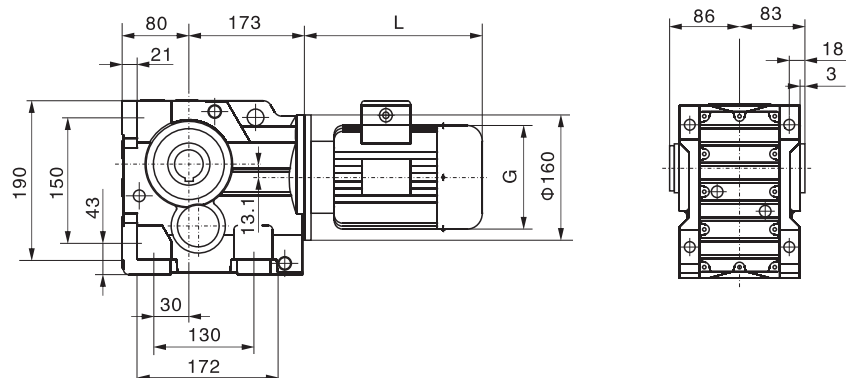

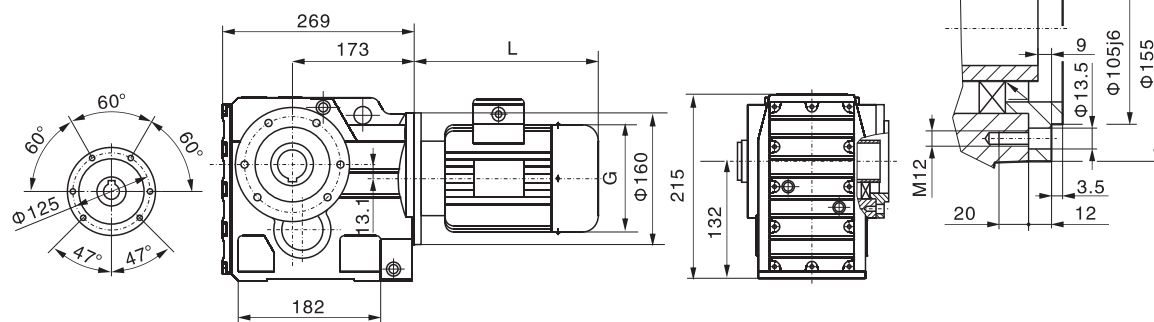
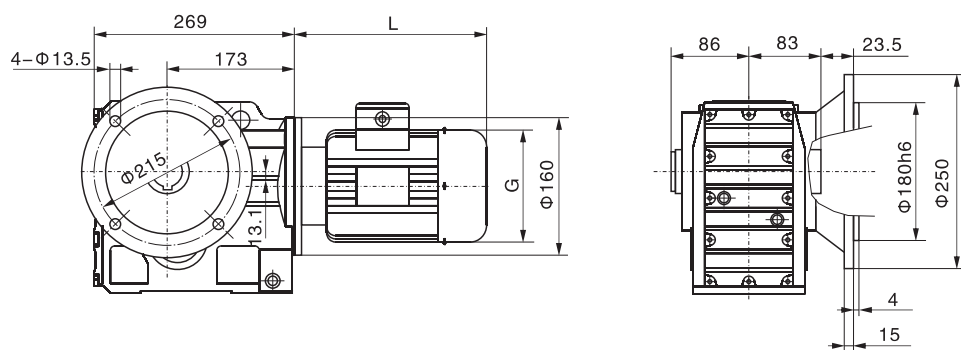



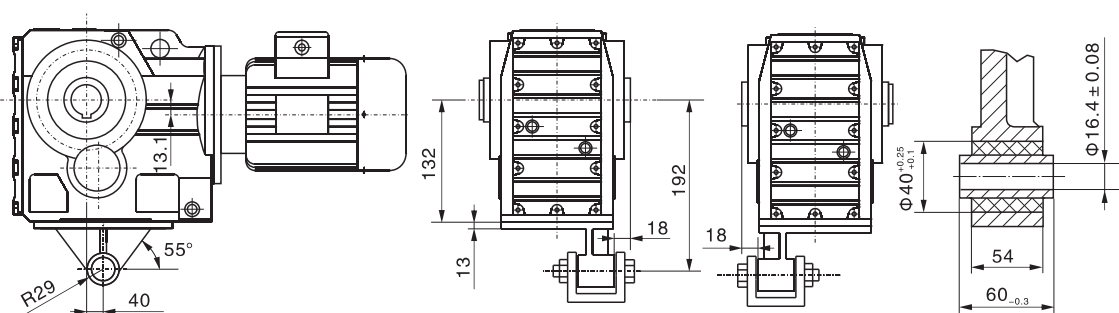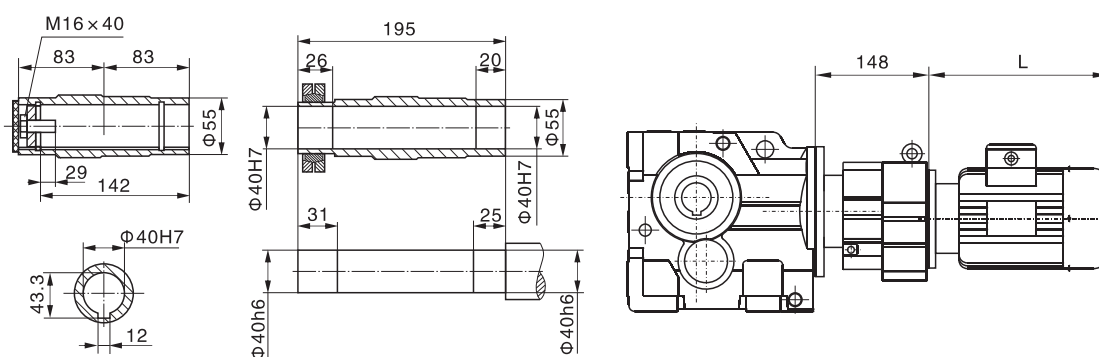**KAT57****K..57 R37**





电机需方配或配特殊电机
时需加联接法兰

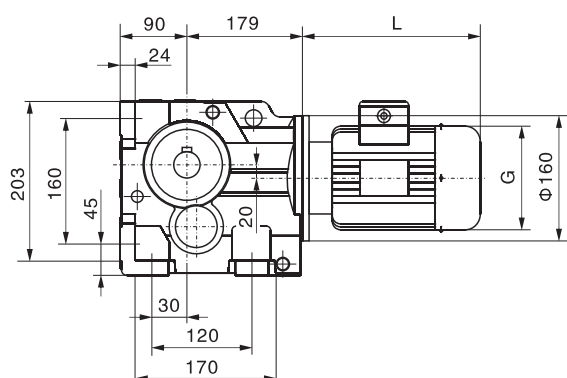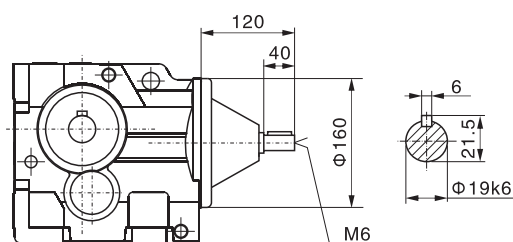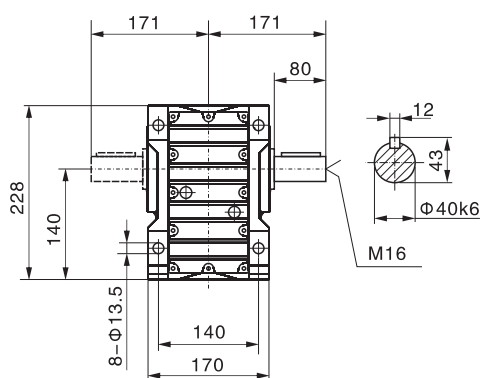**K..S57****K67**





KAB67

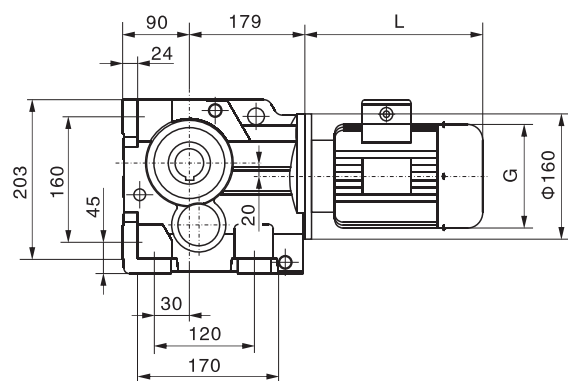




KA67

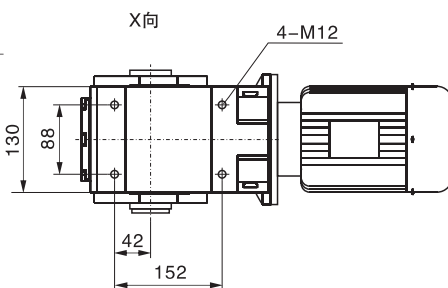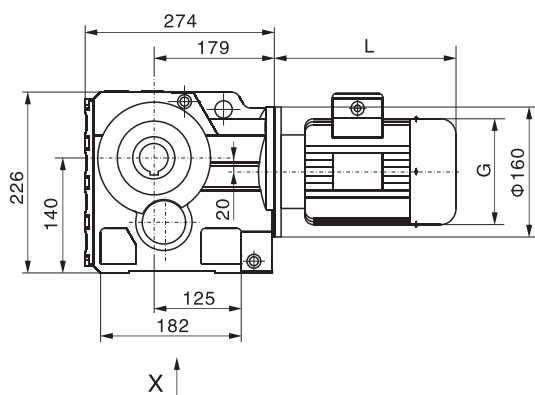


KF67

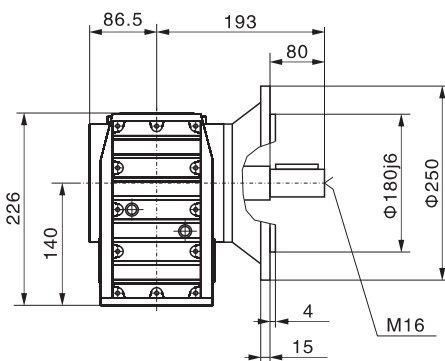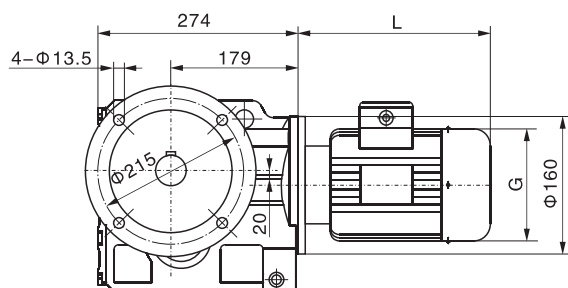



KAF67

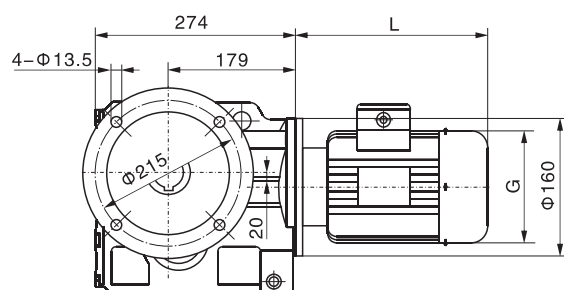



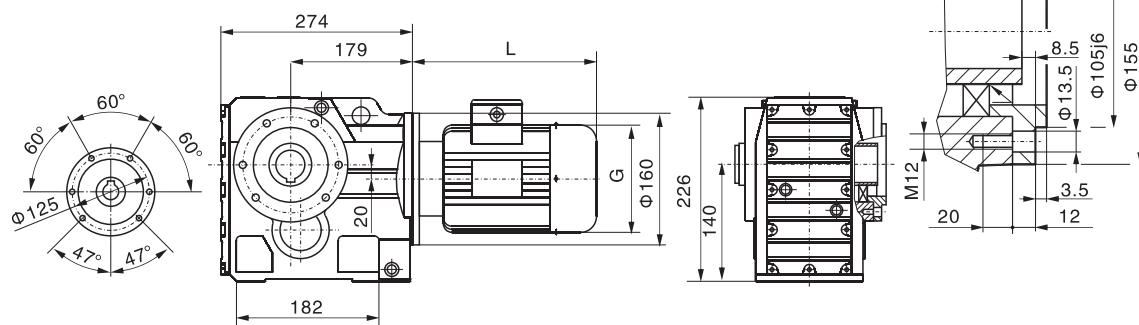


KAZ67

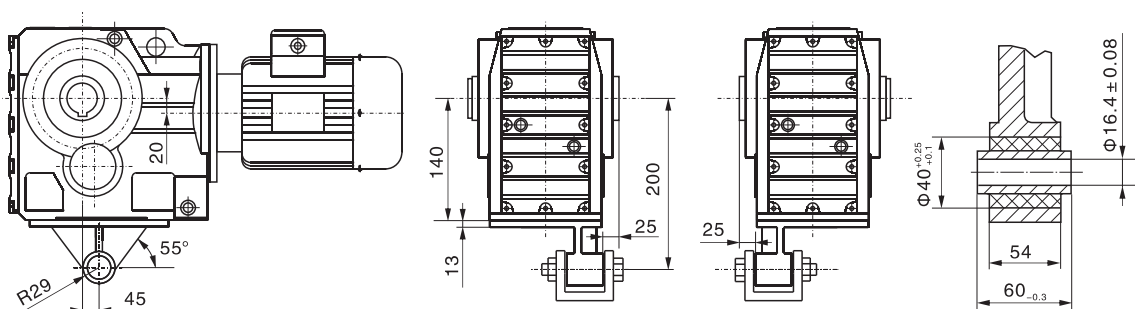



KAT67

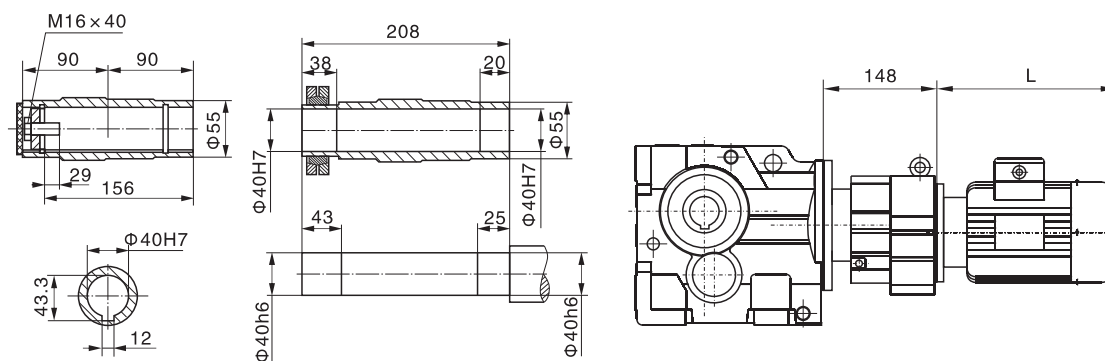


K..67 R37





电机需方配或配特殊电机
时需加联接法兰

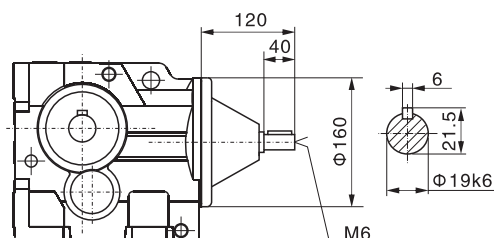



K..S67





K77

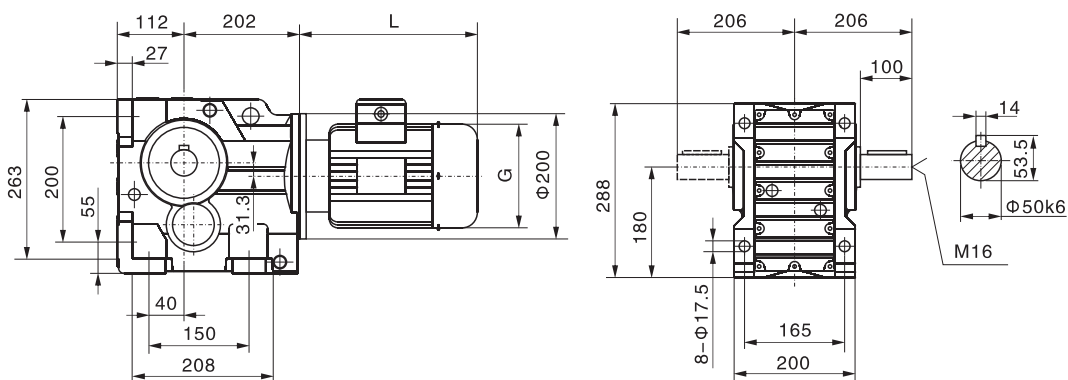



KAB77

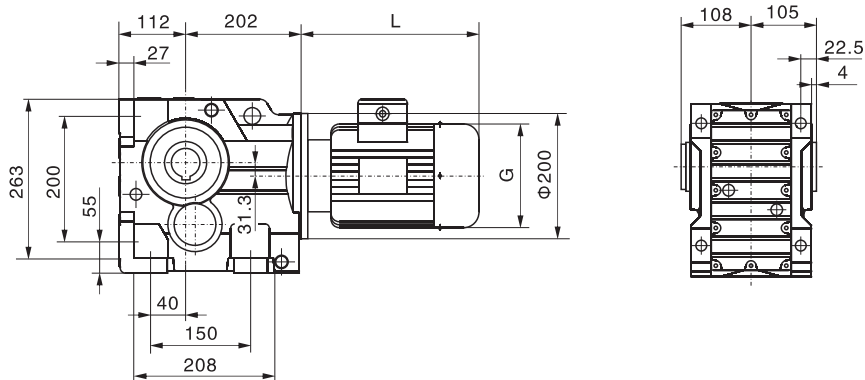


KA77

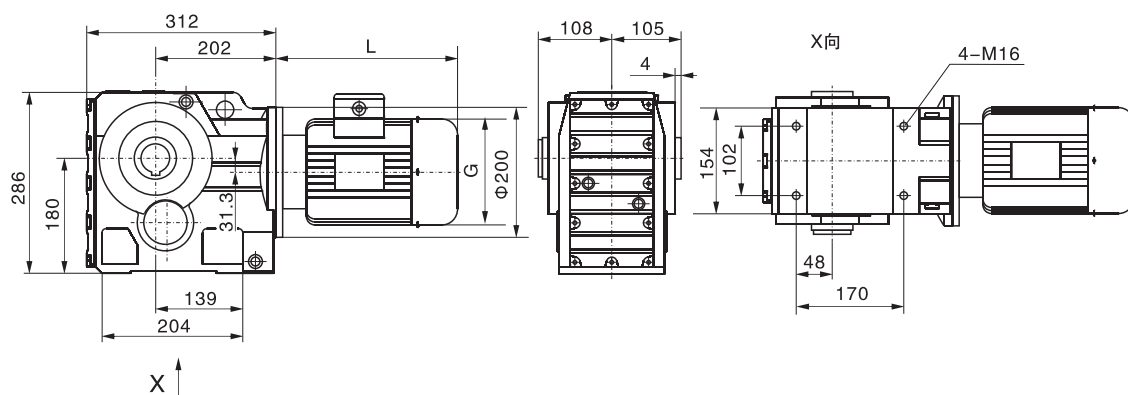



KF77

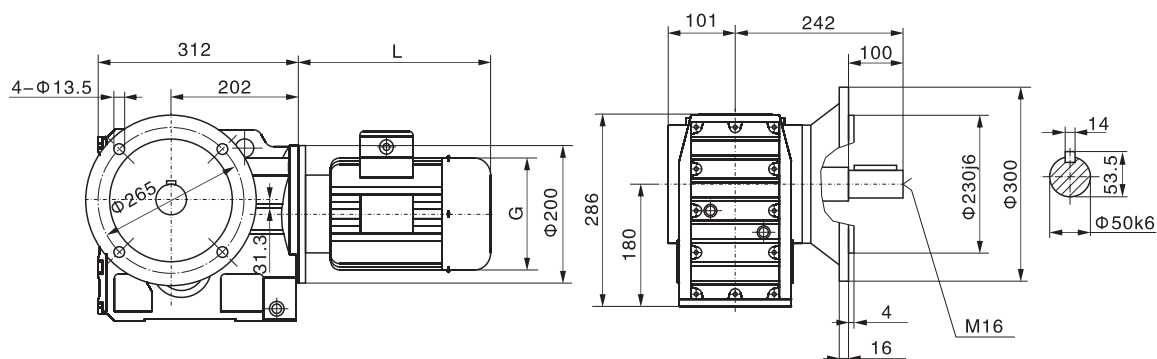



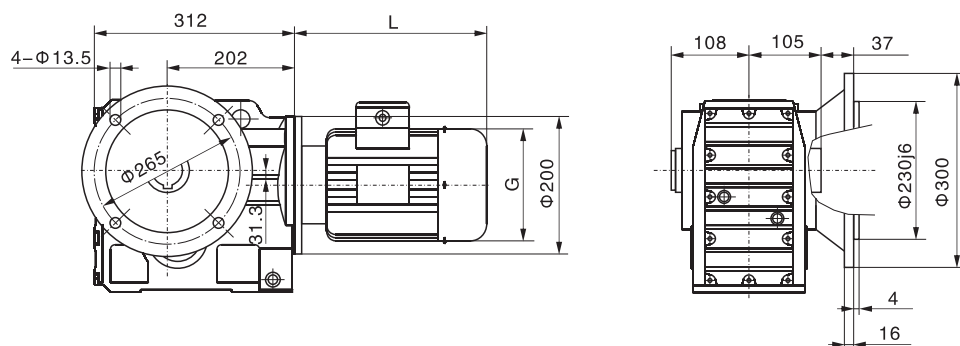



KAF77

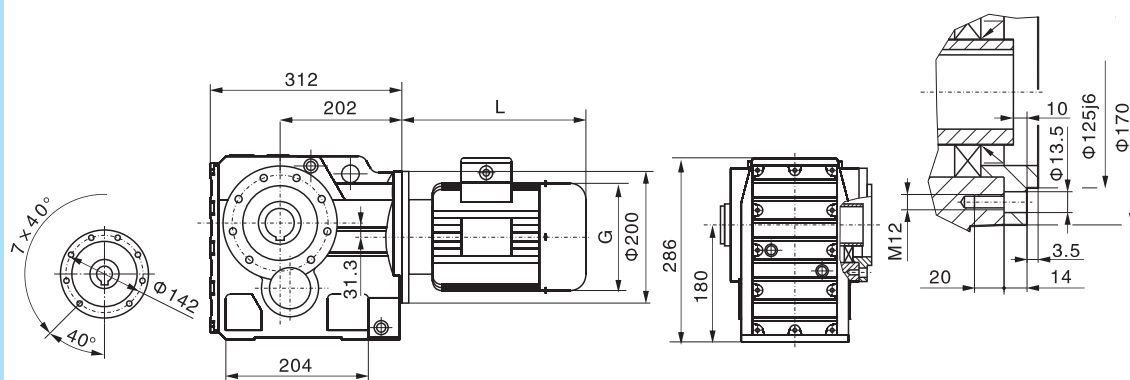


KAZ77

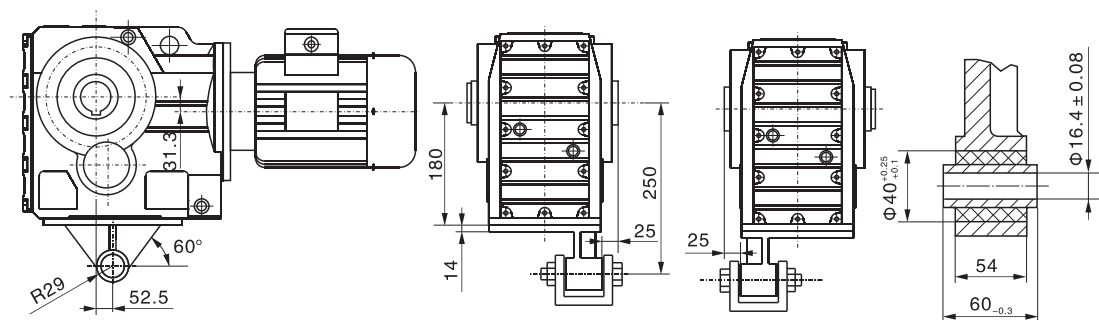



KAT77

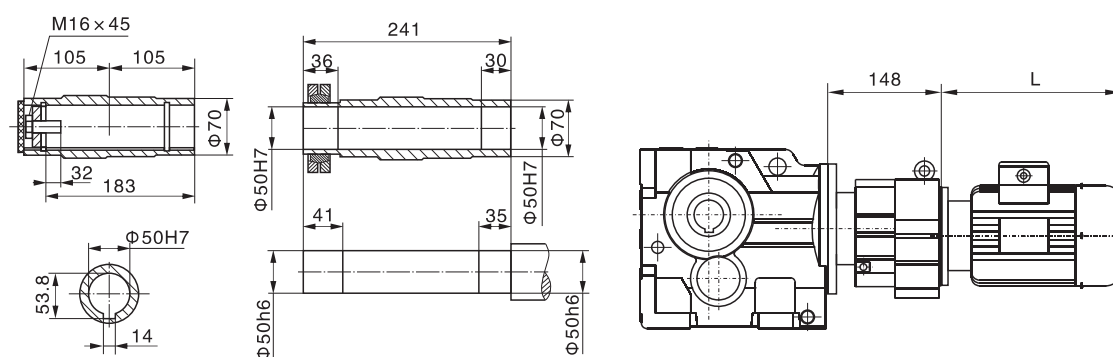


K..77 R37






K..S77

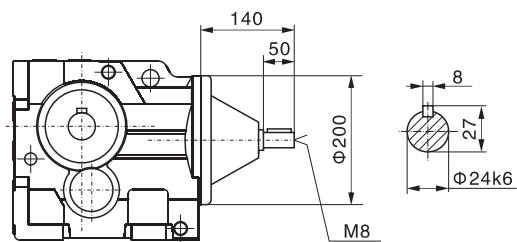




电机需方配或配特殊电机
时需加联接法兰







K87

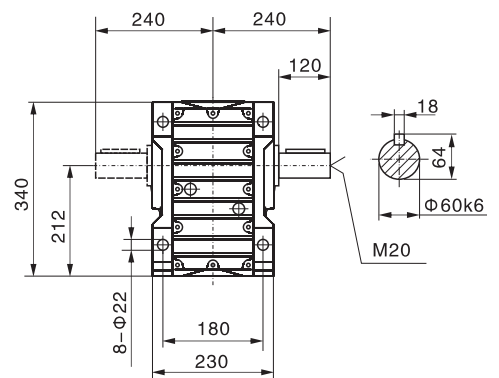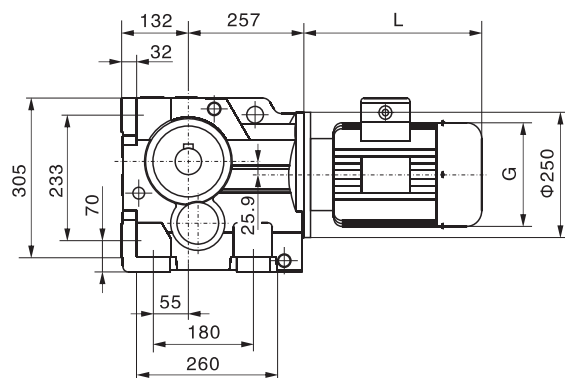



KAB87

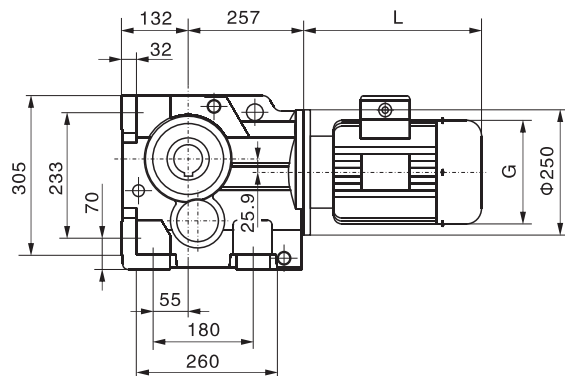



KA87

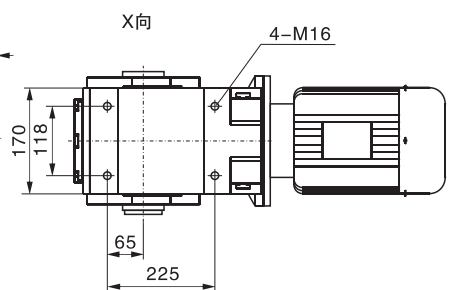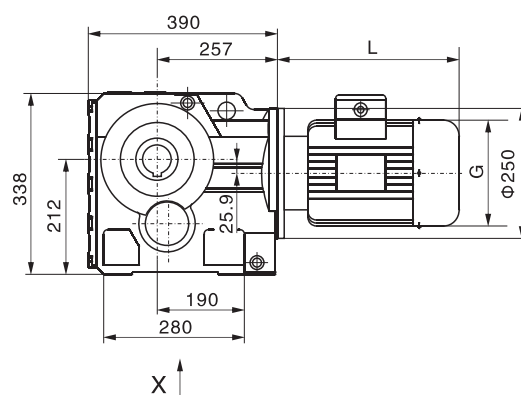



KF87

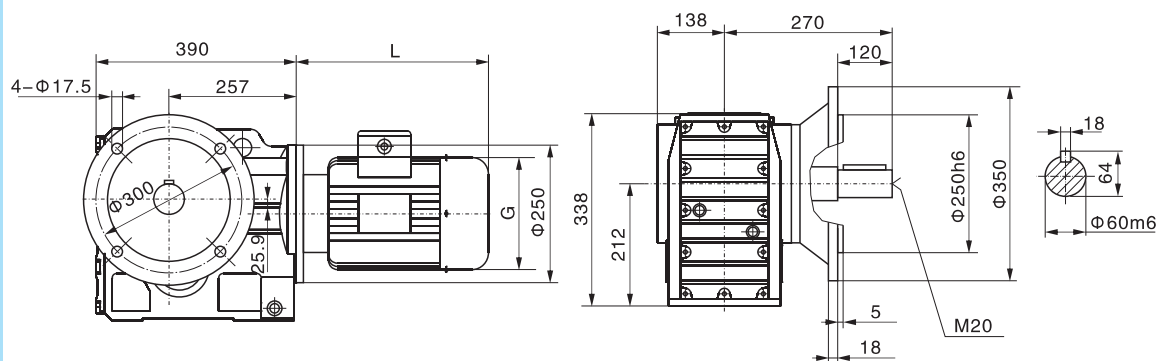



KAF87

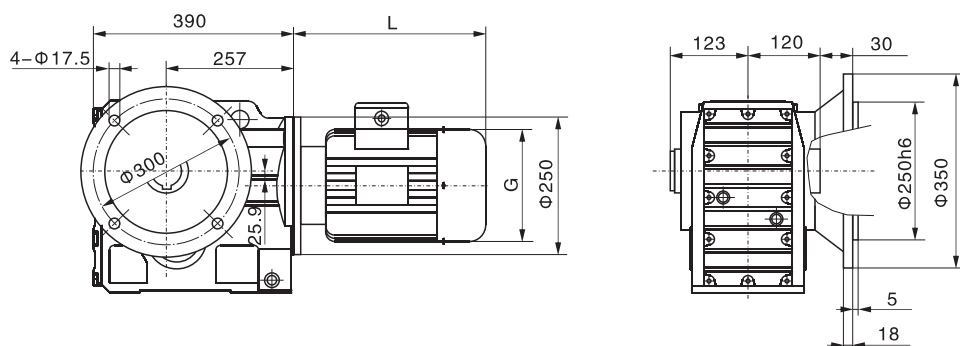



KAZ87

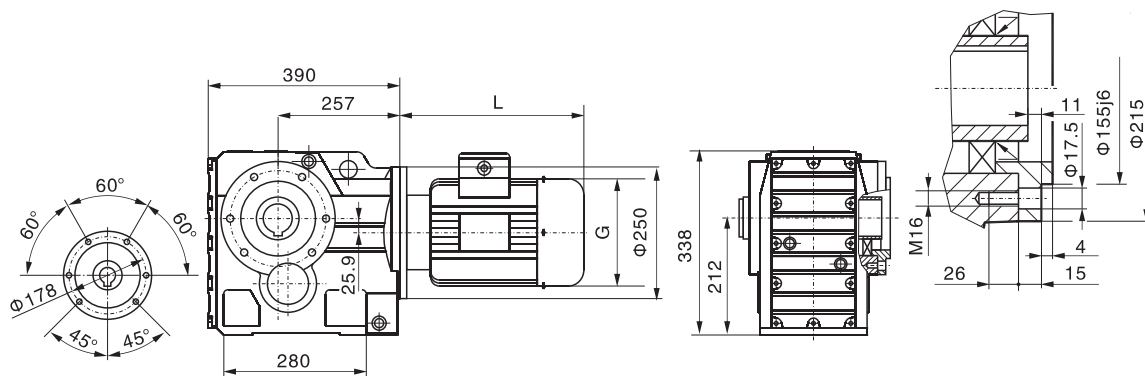



KAT87

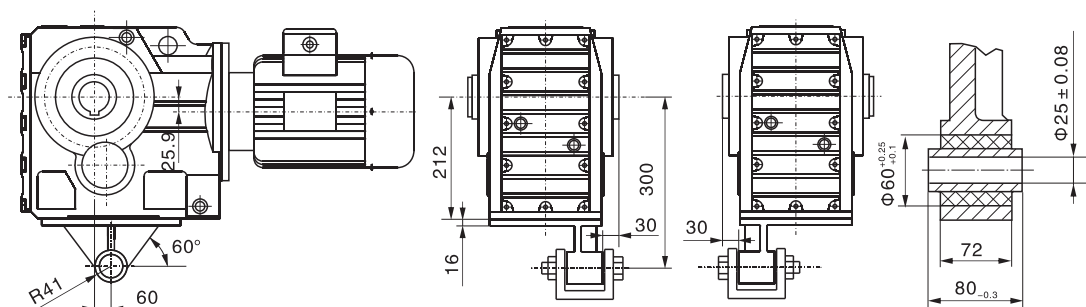


K..87 R57

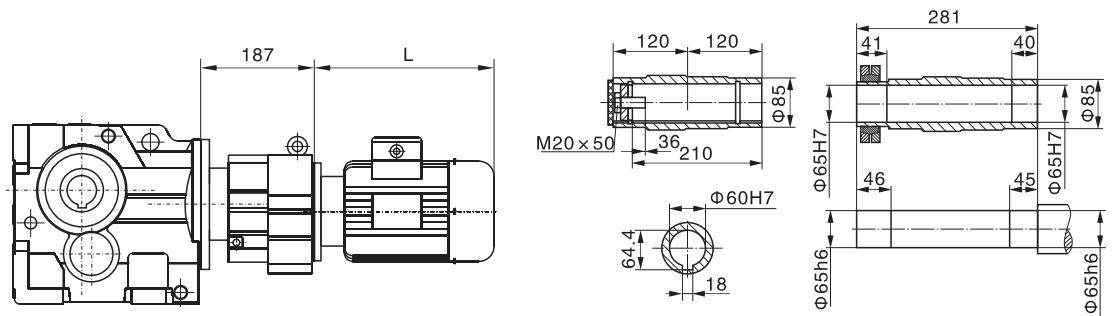




K..S87

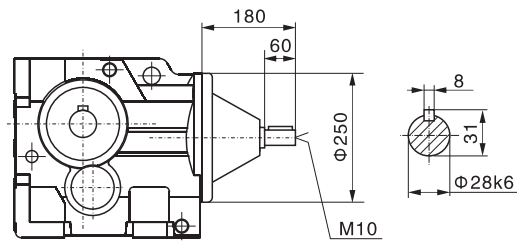




电机需方配或配特殊电机
时需加联接法兰





K97

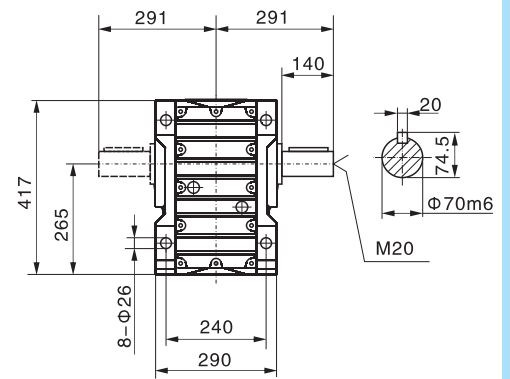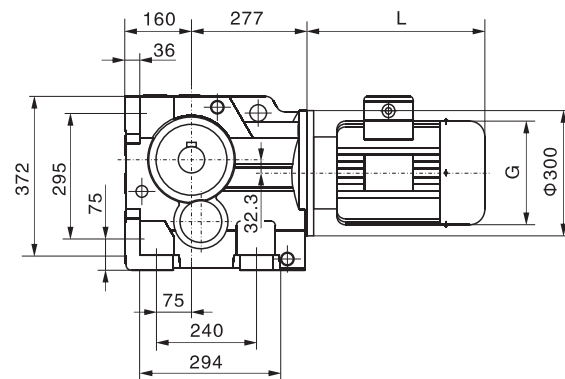



KAB97

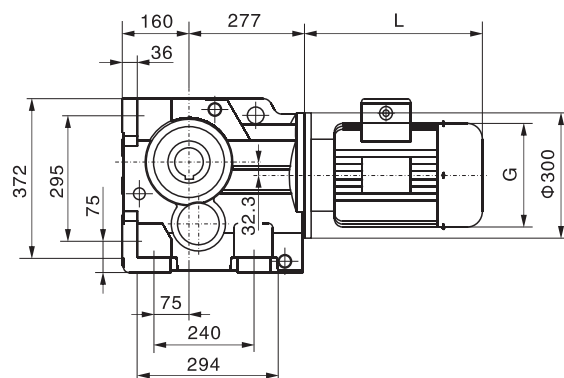



KA97

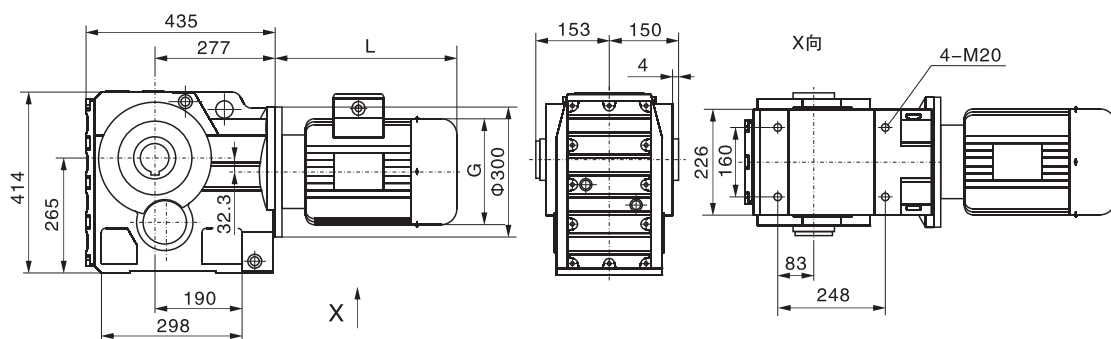



KF97

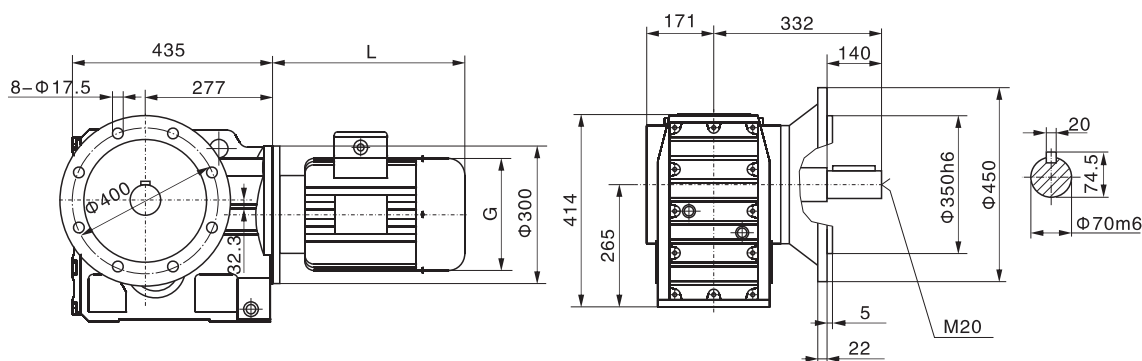



KAF97

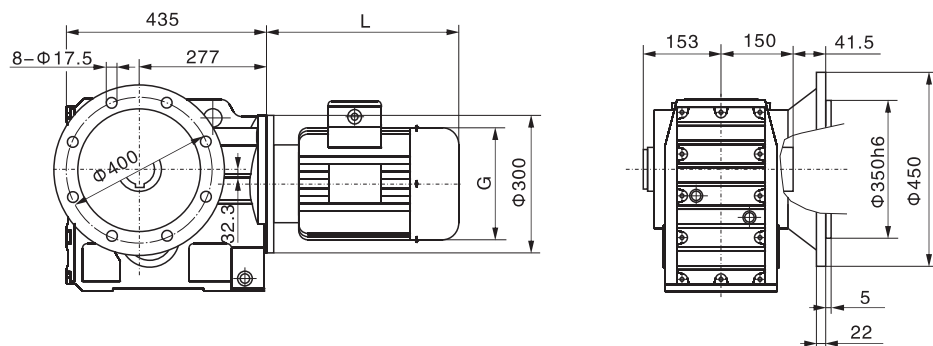



KAZ97

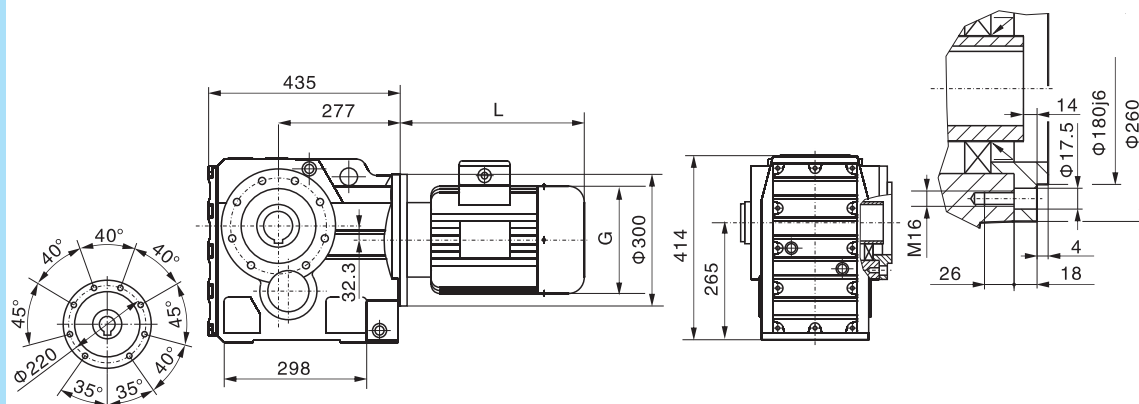



KAT97

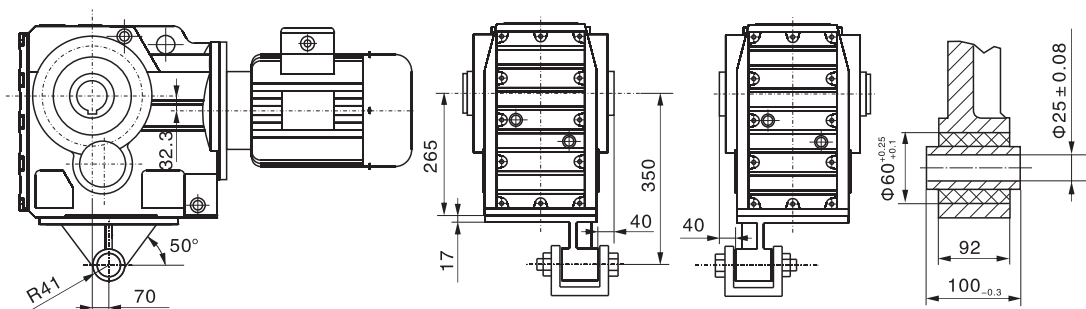


K..97 R57

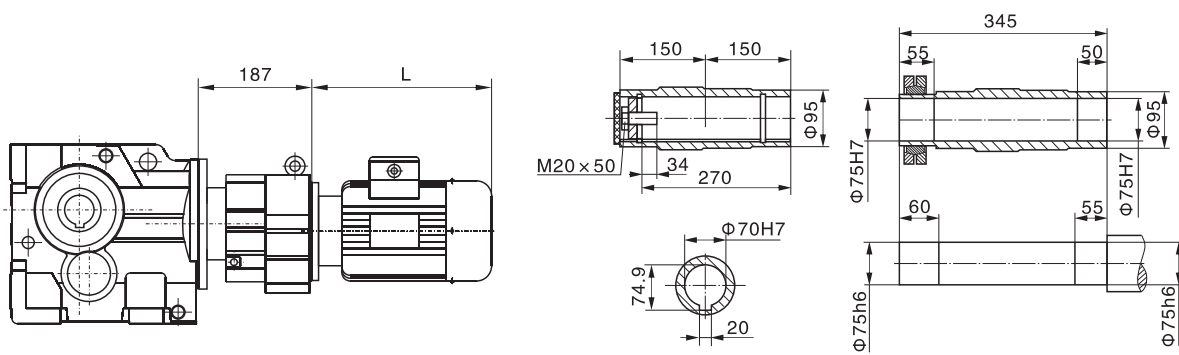



K..S97

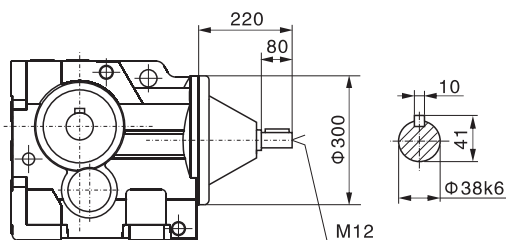


电机需方配或配特殊电机
时需加联接法兰





K107

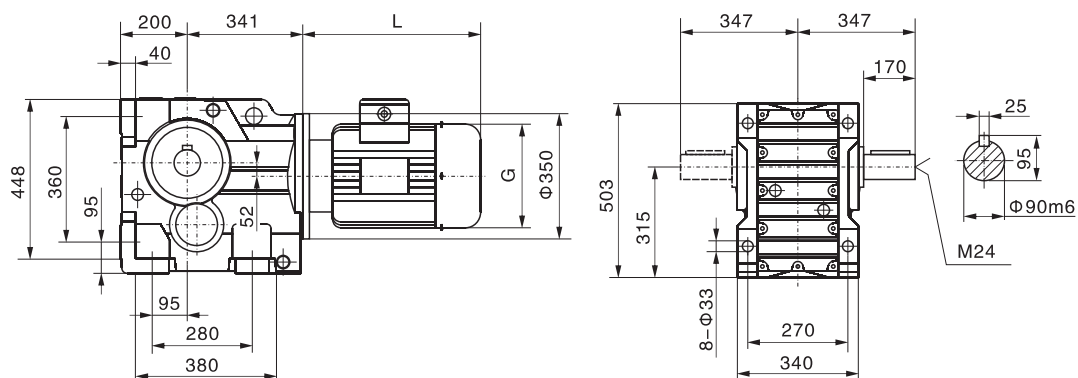



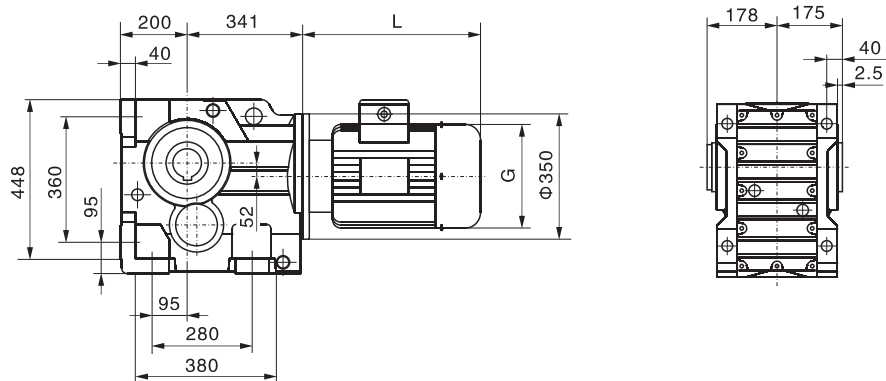



KAB107

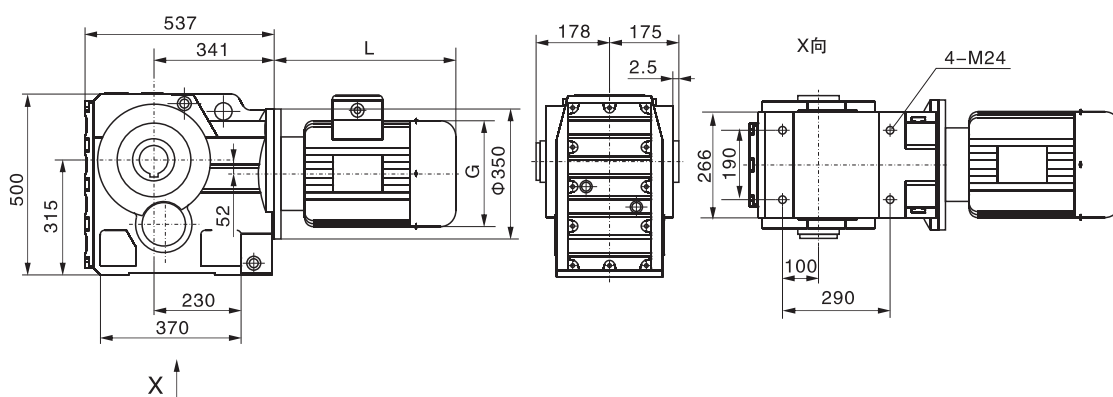


KA107

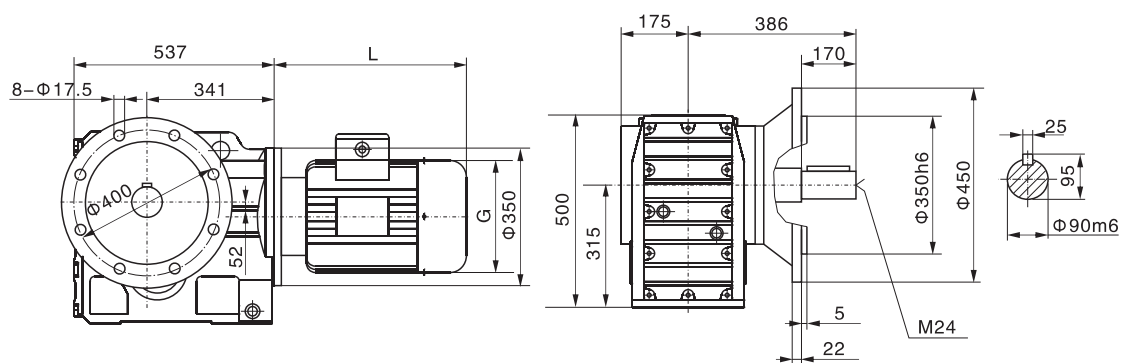



KF107

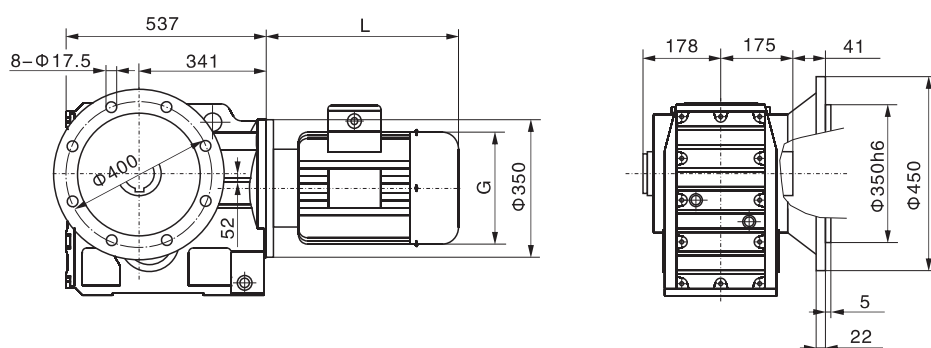



KAF107





KAZ107

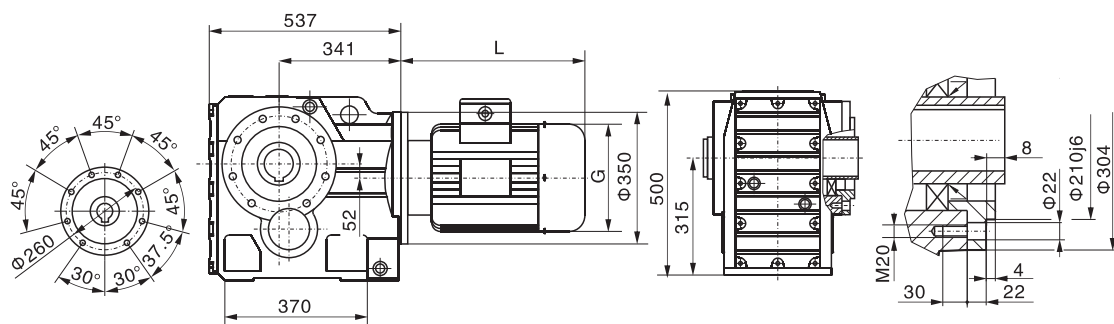



KAT107

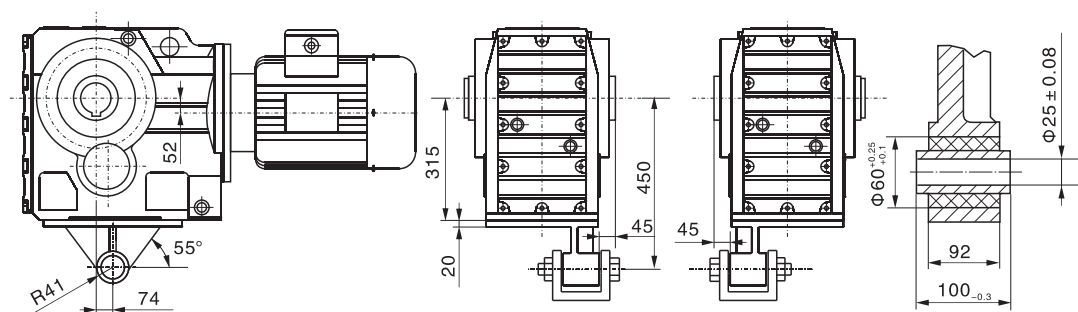


K..107 R77











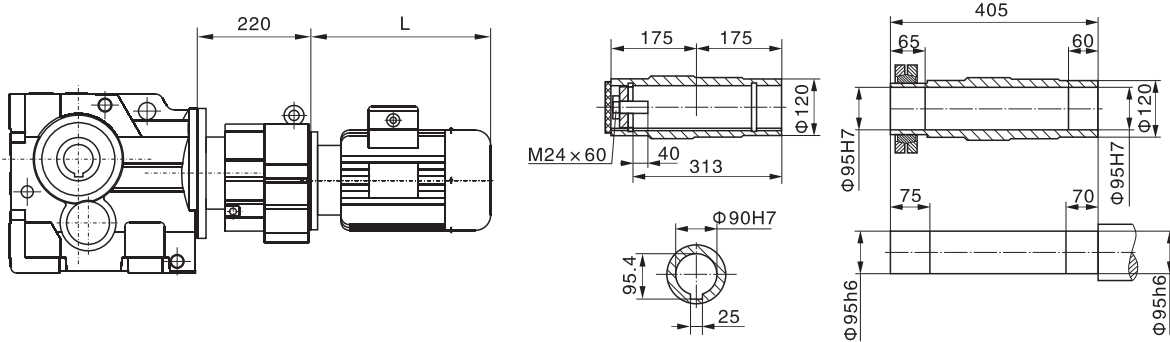



K..S107

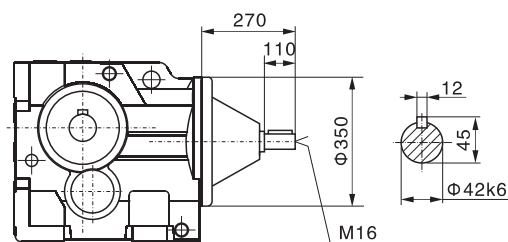



电机需方配或配特殊电机
时需加联接法兰





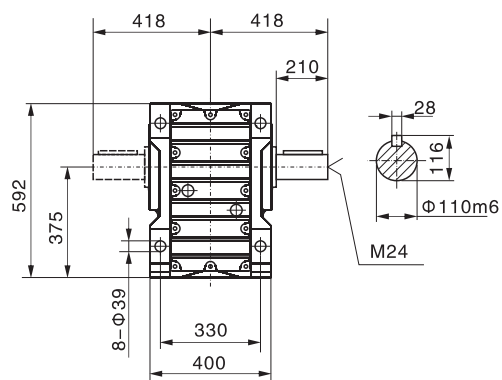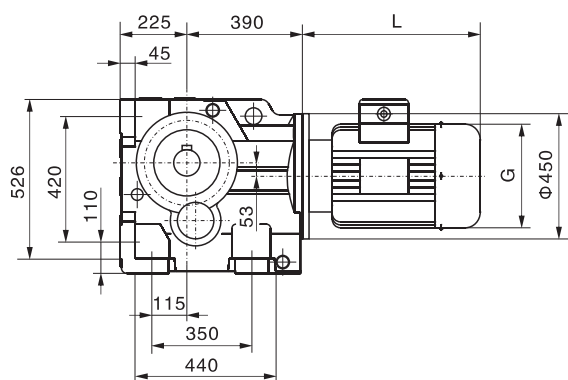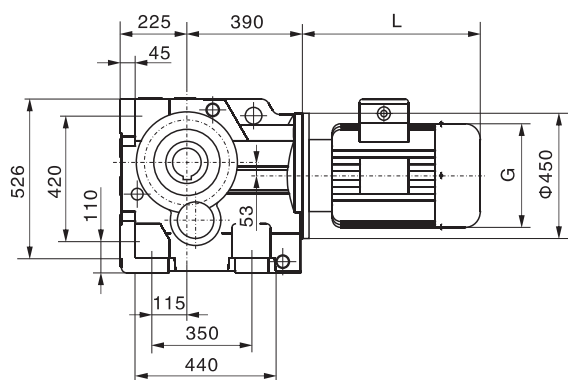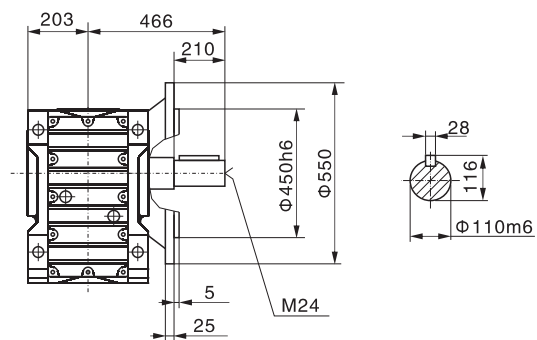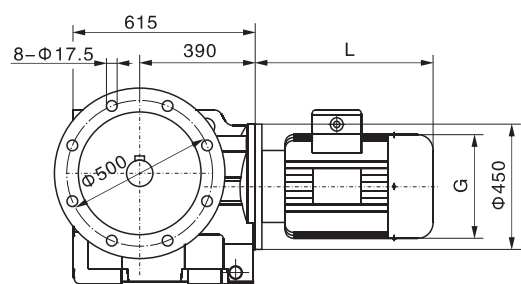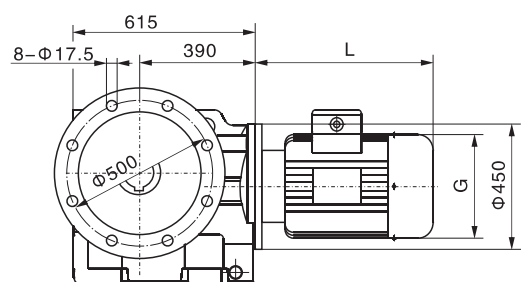**K127****KAB127****KF127****KAF127**



KAZ127

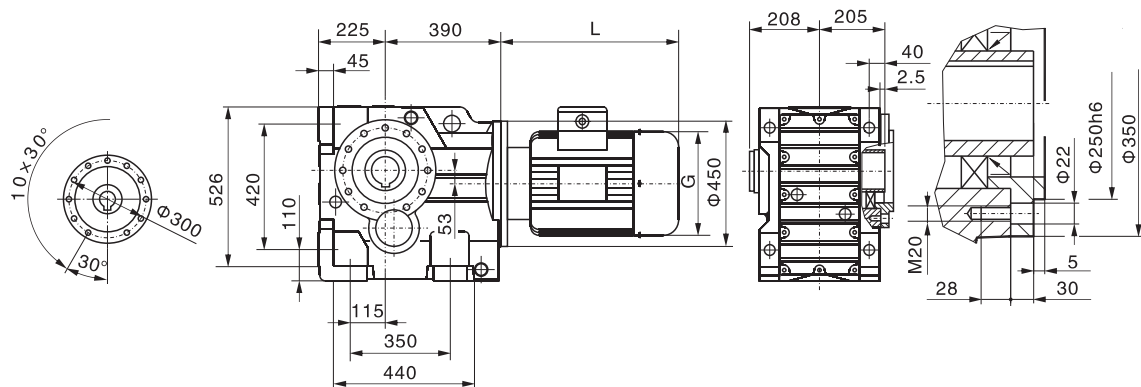



KAT127

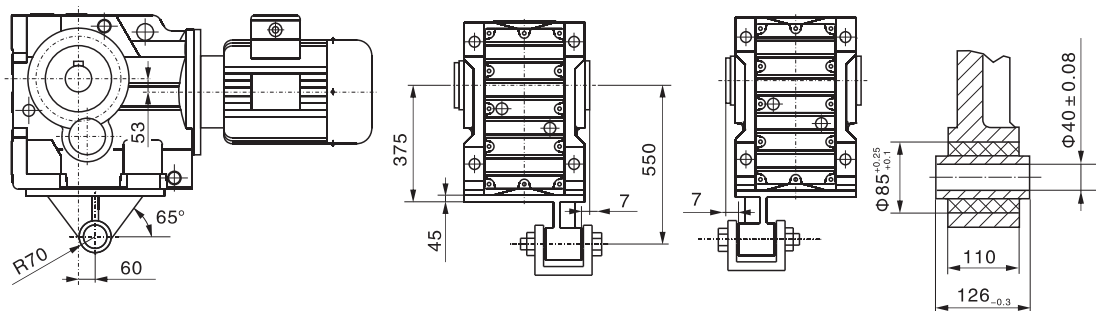


K..127 R77(87)







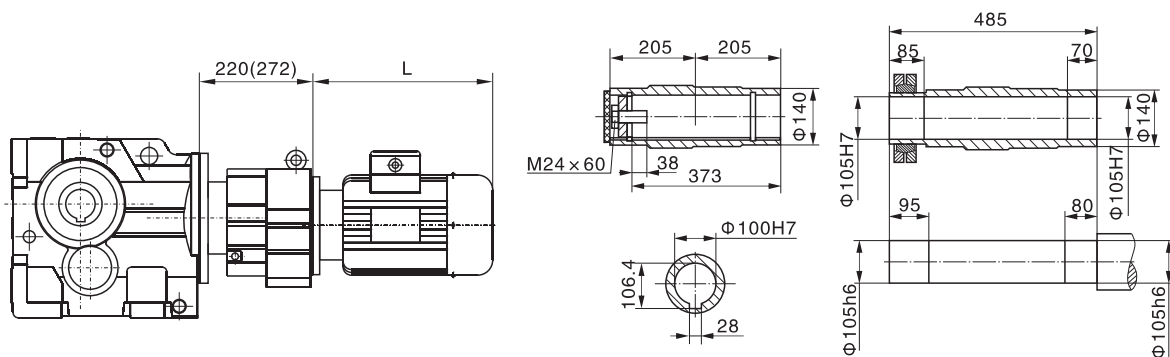







K..S127

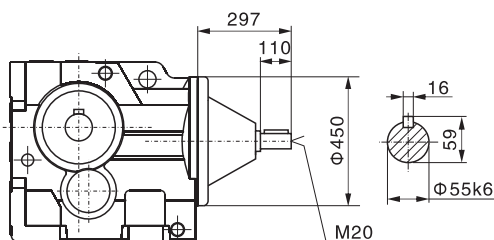


电机需方配或配特殊电机
时需加联接法兰





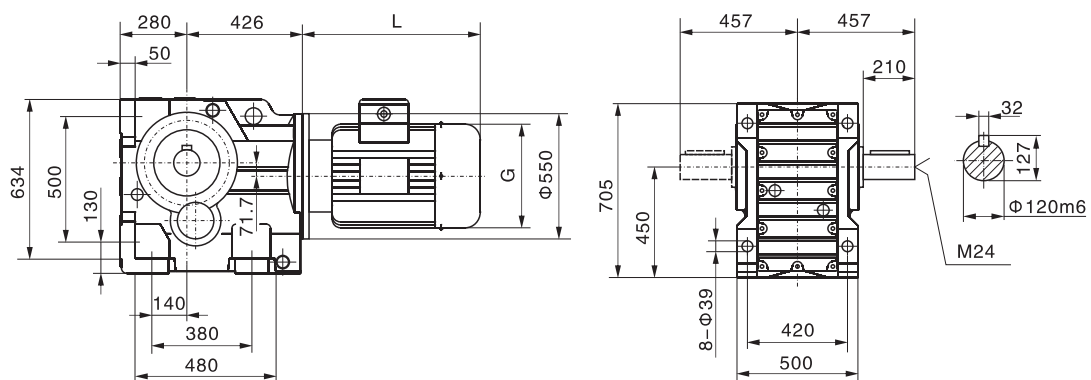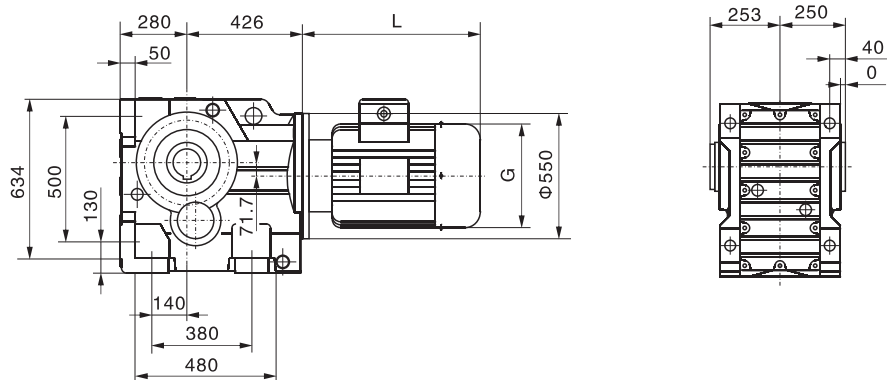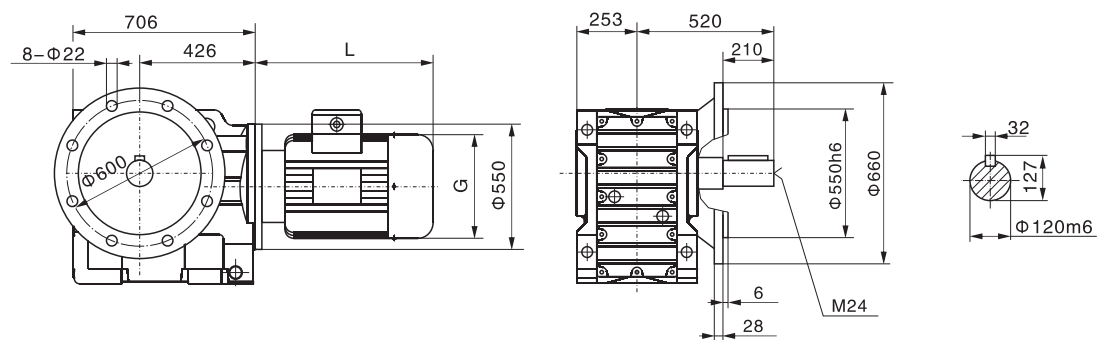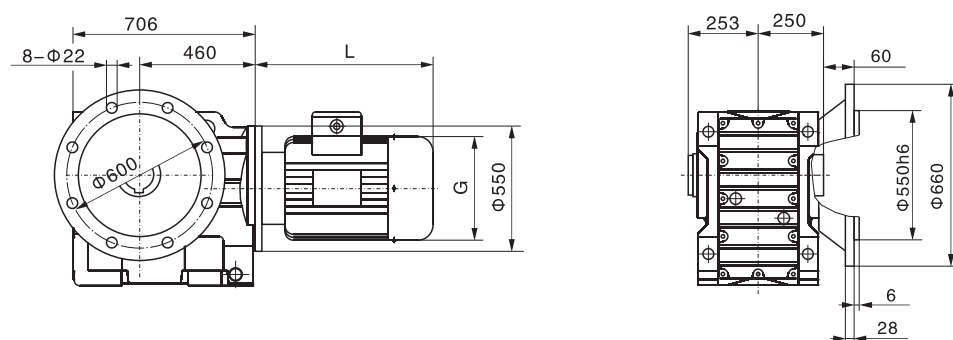**K157****KAB157****KF157****KAF157**





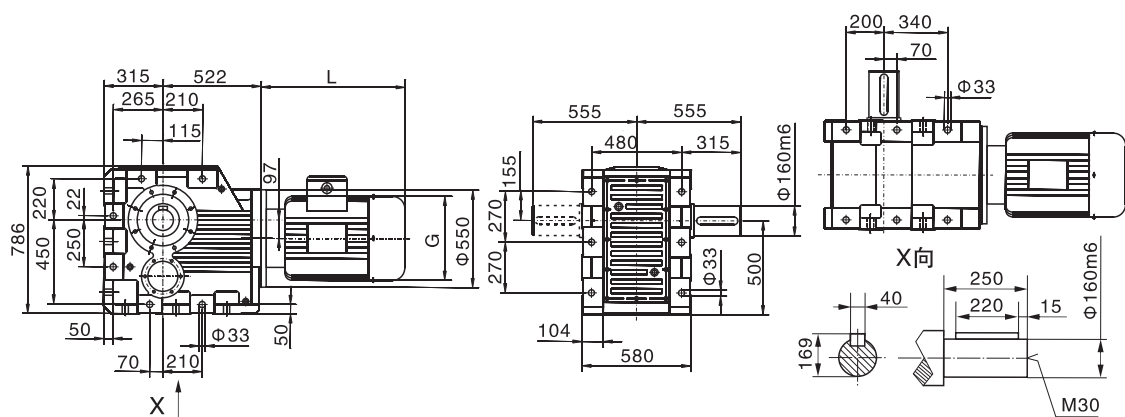


K167

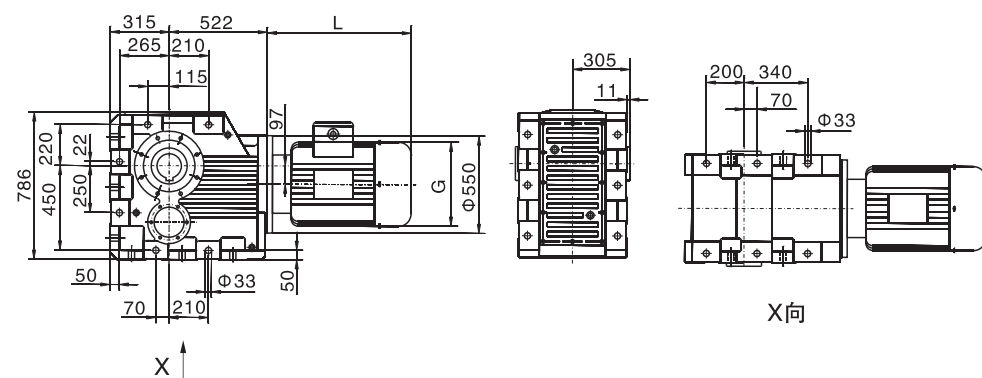



KA167

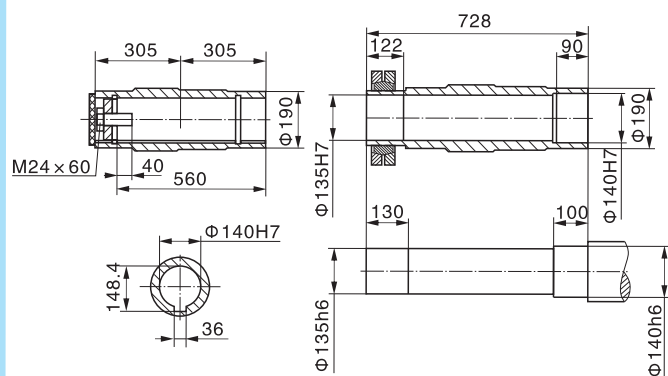


K..167 R97(107)





电机需方配或配特殊电机
时需加联接法兰

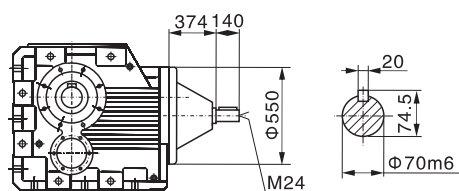



K.S167





K187

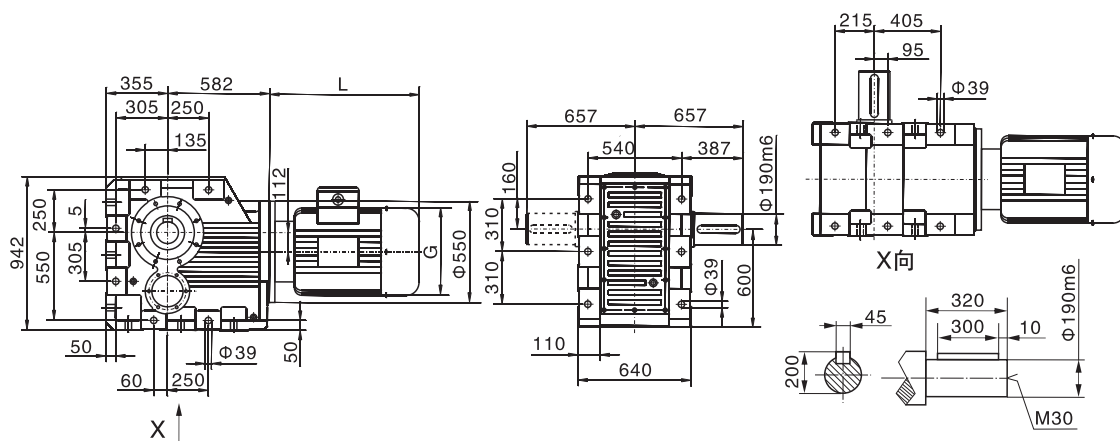



KA187

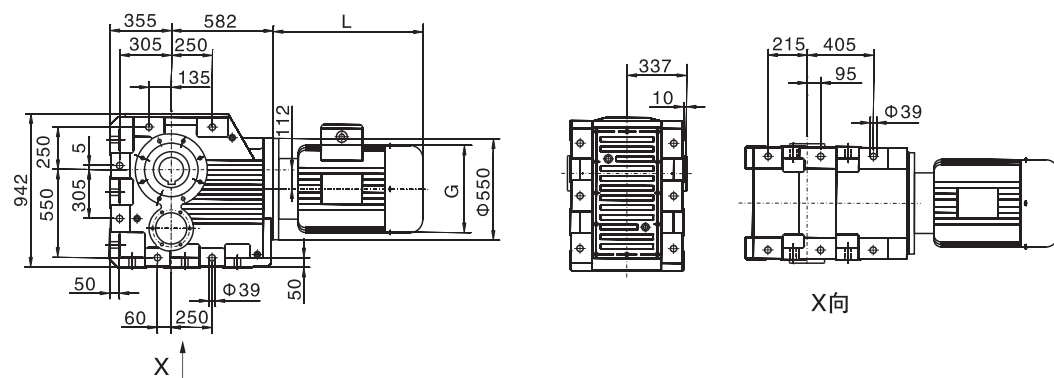


K..187 R97(107)

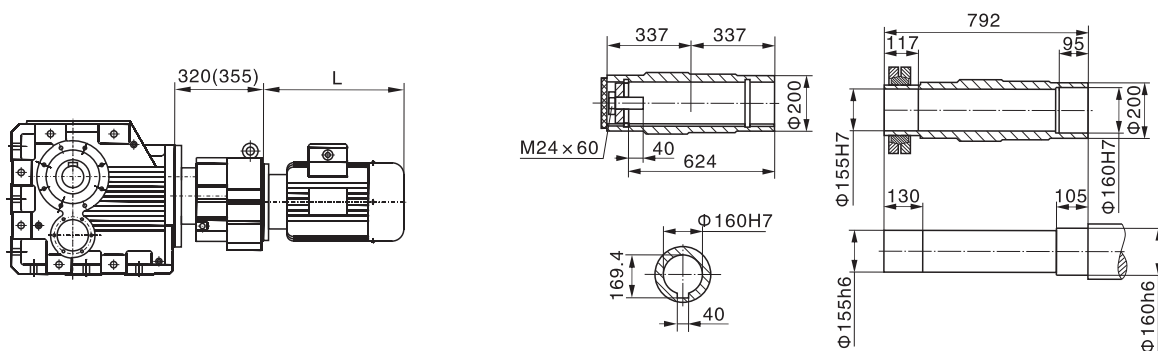

K..S187

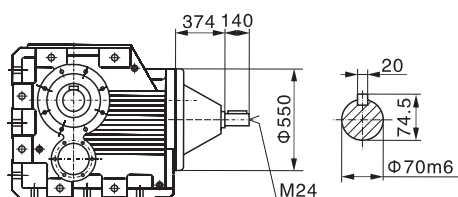

电机需方配或配特殊电机
时需加联接法兰



筱澜传动机械(上海)有限公司
刘石生15050228217(微信同号)
QQ:2440423016
地址:上海市奉贤区南桥镇95弄